



RNC



- ↘ RNC 270
- ↘ RNC 520
- ↘ RNC 770
- ↘ RNC 1020
- ↘ RNC 2020

- ↘ RNC Slim 270
- ↘ RNC Slim 520
- ↘ RNC Slim 770
- ↘ RNC Slim 1020
- ↘ RNC Slim 2020

RNC

Installazione

Installation
Installation
Instalación

Incasso terra

Ground recess
Encastrement au sol
Empotrar suelo

Materiali

Materials
Materiali
Materiales

Materiale Corpo: PMMA | Tipo di diffusore: PMMA

Material: PMMA | Diffuser type: PMMA
Matériel du corps: PMMA | Type de diffuseur: PMMA
Material del cuerpo: PMMA | Tipo de difusor: PMMA

Alimentazione

Power supply
Alimentation
Alimentación

24V

Versioni


Versions
Versions
Versiones

Cavo Alimentazione: 1 metro H05RN-F


Power cable: 1 m H05RN-F
Câble d'alimentation: 1 m H05RN-F
Cable de alimentación: 1 m H05RN-F




RNC
270




RNC
520



RNC
770



RNC
1020



RNC
2020



COLOURS



Neutral

RNC 270

IP67 IK 10 20J xx9 CE UK ER 2000 <small>KG MAX</small> 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	2,5	300	75		24V	LL138000 <input type="checkbox"/>

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 520

IP67 IK 10 20J xx9 CE UK ER 2000 <small>KG MAX</small> 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	5	600	155		24V	LL138001 <input type="checkbox"/>

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 770

IP67 IK 10 20J xx9 CE UK ER 2000 <small>KG MAX</small> 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	7,5	900	220		24V	LL138002 <input type="checkbox"/>

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 1020

IP67 IK 10 20J xx9 CE UK ER 2000 <small>KG MAX</small> 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	10	1200	300		24V	LL138003 <input type="checkbox"/>

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC 2020

IP67 IK 10 20J xx9 CE UK ER 2000 <small>KG MAX</small> 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	20	2400	590		24V	LL138004 <input type="checkbox"/>

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Chiavi di rimozione RNC

Chiavi per rimozione apparecchio.

RNC removal keys

Keys for device removal

CoL. Code

LB1380000

Clés de retrait RNC

Clés pour retirer l'appareil

Llaves de extracción RNC

Llaves para extraer el aparato



Armatura da incasso RNC 270

Armatura da incasso in alluminio.

Recess box RNC 270

Aluminium recessed box.

CoL. Code


LB1380001

Armature à encastrer RNC 270

Armature à encastrer en aluminium.

Caja de empotrar RNC 270

Caja de empotrar de aluminio.



Armatura da incasso RNC 520

Armatura da incasso in alluminio.

Recess box RNC 520

Aluminium recessed box.

CoL. Code


LB1380002

Armature à encastrer RNC 520

Armature à encastrer en aluminium.

Caja de empotrar RNC 520

Caja de empotrar de aluminio.



Armatura da incasso RNC 770

Armatura da incasso in alluminio.

Recess box RNC 770

Aluminium recessed box.

CoL. Code


LB1380003

Armature à encastrer RNC 770

Armature à encastrer en aluminium.

Caja de empotrar RNC 770

Caja de empotrar de aluminio.

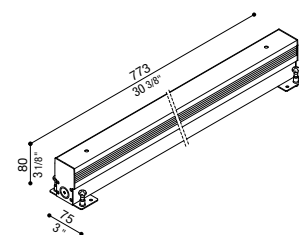

Armatura da incasso RNC 1020

Armatura da incasso in alluminio.

Recess box RNC 1020

Aluminium recessed box.

CoL. Code


LB1380004

Armature à encastrer RNC 1020

Armature à encastrer en aluminium.

Caja de empotrar RNC 1020

Caja de empotrar de aluminio.

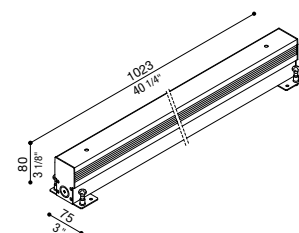

Armatura da incasso RNC 2020

Armatura da incasso in alluminio.

Recess box RNC 2020

Aluminium recessed box.


Armature à encastrer RNC 2020

Armature à encastrer en aluminium.

Caja de empotrar RNC 2020

Caja de empotrar de aluminio.

CoL.	Code
	LB1380009



Cavo H05RN-F 2x0,75

Cavo H05RN-F in Neoprene, sezione 2x0,75. Adatto ad uso esterno.

Cable type H05RN-F 2x0,75

Cable type H05RN-F in Neoprene, section 2x0.75. Suitable for outdoor use.

Câble H05RN-F 2x0,75

Câble H05RN-F en Néoprène, section 2x0,75. Également adapté à l'usage à l'extérieur.

Cable H05RN-F 2x0,75

Cable H05RN-F de Neopreno, sección 2x0,75. Adecuado para el uso al exteriores.

Cavo H05RN-F 5m

CoL.	Code
	LB1070004

Cavo H05RN-F 15m

CoL.	Code
	LB1070006

Cavo H05RN-F 10m

CoL.	Code
	LB1070005

Cavo H05RN-F 20m

CoL.	Code
	LB1070007



Alimentatore 24V in tensione costante RNC

24V constant voltage driver RNC

Alimentation à tension constante de 24V RNC

Alimentador de tensión constante de 24V RNC


RNC 270 / RNC Slim 270		
N° max	IP	Code
1/8	20	LB1070029
1/12	20	LB1070030
1/8	67	LB1070031
1/16	67	LB1070032
1/6 DALI	20	LB1070065
1/15 0-10V	67	LB1070113
1/15 DALI	67	LB1070114

RNC 520 / RNC Slim 520		
N° max	IP	Code
1/4	20	LB1070029
1/7	20	LB1070030
1/4	67	LB1070031
1/8	67	LB1070032
1/3 DALI	20	LB1070065
1/10 0-10V	67	LB1070113
1/10 DALI	67	LB1070114

RNC 770 / RNC Slim 770		
N° max	IP	Code
1/2	20	LB1070029
1/4	20	LB1070030
1/2	67	LB1070031
1/5	67	LB1070032
1/2 DALI	20	LB1070065
1/7 0-10V	67	LB1070113
1/7 DALI	67	LB1070114

RNC 1020 / RNC Slim 1020		
N° max	IP	Code
1/2	20	LB1070030
1/4	67	LB1070032
1 DALI	20	LB1070065
1/5 0-10V	67	LB1070113
1/5 DALI	67	LB1070114

RNC 2020 / RNC Slim 2020		
N° max	IP	Code
1	20	LB1070030
1/2	67	LB1070032
1/2 0-10V	67	LB1070113
1/2 DALI	67	LB1070114



RNC SLIM

Installazione

Installation
Installation
Instalación

Incasso terra

Ground recess
Encastrement au sol
Empotrar suelo

Materiali

Materials
Materiali
Materiales

Materiale Corpo: PMMA | Tipo di diffusore: PMMA

Material: PMMA | Diffuser type: PMMA
Matériel du corps: PMMA | Type de diffuseur: PMMA
Material del cuerpo: PMMA | Tipo de difusor: PMMA

Alimentazione

Power supply
Alimentation
Alimentación

24V

Versioni

Versions
Versions
Versiones

Cavo Alimentazione: 1 metro H05RN-F

Power cable: 1 m H05RN-F
Câble d'alimentation: 1 m H05RN-F
Cable de alimentación: 1 m H05RN-F

RNC SLIM
270

RNC SLIM
520

RNC SLIM
770

RNC SLIM
1020

RNC SLIM
2020



COLOURS



Neutral

RNC Slim 270

IP 67 IK 10 20J xx9 CE UK CR 2000 KG MAX 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	2,5	300	65	24V	LL138100□	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 520

IP 67 IK 10 20J xx9 CE UK CR 2000 KG MAX 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	5	600	125	24V	LL138101□	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 770

IP 67 IK 10 20J xx9 CE UK CR 2000 KG MAX 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	7,5	900	200	24V	LL138102□	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 1020

IP 67 IK 10 20J xx9 CE UK CR 2000 KG MAX 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	10	1200	280	24V	LL138103□	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

RNC Slim 2020

IP 67 IK 10 20J xx9 CE UK CR 2000 KG MAX 35°C MAX	LED			COL.	CODE *	
	W	LM	REAL LM			
	20	2400	550	24V	LL138104□	

* Complete the CODE LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

Chiavi di rimozione RNC

Chiavi per rimozione apparecchio.

RNC removal keys

Keys for device removal

Clés de retrait RNC


Clés pour retirer l'appareil

Llaves de extracción RNC

Llaves para extraer el aparato

CoL. Code

LB1380000



Armatura da incasso RNC Slim 270

Armatura da incasso in alluminio.

Recess box RNC Slim 270

Aluminium recessed box.

Armature à encastrer RNC Slim 270


Armature à encastrer en aluminium.

Caja de empotrar RNC Slim 270

Caja de empotrar de aluminio.

CoL. Code

LB1380005



Armatura da incasso RNC Slim 520

Recess box RNC Slim 520

Aluminium recessed box.

Armature à encastrer RNC Slim 520


Armature à encastrer en aluminium.

Caja de empotrar RNC Slim 520

Caja de empotrar de aluminio.

CoL. Code

LB1380006

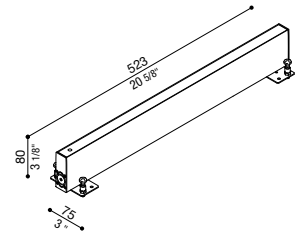

Armatura da incasso RNC Slim 770

Armatura da incasso in alluminio.

Recess box RNC Slim 770

Aluminium recessed box.

Armature à encastrer RNC Slim 770


Armature à encastrer en aluminium.

Caja de empotrar RNC Slim 770

Caja de empotrar de aluminio.

CoL. Code

LB1380007

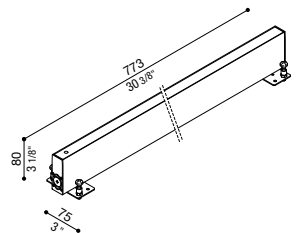

Armatura da incasso RNC Slim 1020

Armatura da incasso in alluminio.

Recess box RNC Slim 1020

Aluminium recessed box.

Armature à encastrer RNC Slim 1020


Armature à encastrer en aluminium.

Caja de empotrar RNC Slim 1020

Caja de empotrar de aluminio.

CoL. Code

LB1380008

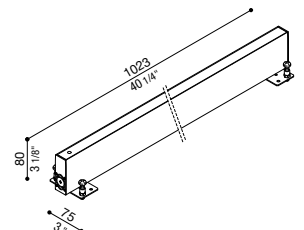

Armatura da incasso RNC Slim 2020

Armatura da incasso in alluminio.

Recess box RNC Slim 2020

Aluminium recessed box.


Armature à encastrer RNC Slim 2020

Armature à encastrer en aluminium.

Caja de empotrar RNC Slim 2020

Caja de empotrar de aluminio.

Col.	Code
	LB1380010



Cavo H05RN-F 2x0,75

Cavo H05RN-F in Neoprene, sezione 2x0,75. Adatto ad uso esterno.

Cable type H05RN-F 2x0,75

Cable type H05RN-F in Neoprene, section 2x0.75. Suitable for outdoor use.

Câble H05RN-F 2x0,75

Câble H05RN-F en Néoprène, section 2x0,75. Également adapté à l'usage à l'extérieur.

Cable H05RN-F 2x0,75

Cable H05RN-F de Neopreno, sección 2x0,75. Adecuado para el uso al exteriores.

Cavo H05RN-F 5m

Col.	Code
	LB1070004

Cavo H05RN-F 15m

Col.	Code
	LB1070006

Cavo H05RN-F 10m

Col.	Code
	LB1070005

Cavo H05RN-F 20m

Col.	Code
	LB1070007



Alimentatore 24V in tensione costante RNC

24V constant voltage driver RNC

Alimentation à tension constante de 24V RNC

Alimentador de tensión constante de 24V RNC


RNC 270 / RNC Slim 270		
N° max	IP	Code
1/8	20	LB1070029
1/12	20	LB1070030
1/8	67	LB1070031
1/16	67	LB1070032
1/6 DALI	20	LB1070065
1/15 0-10V	67	LB1070113
1/15 DALI	67	LB1070114

RNC 520 / RNC Slim 520		
N° max	IP	Code
1/4	20	LB1070029
1/7	20	LB1070030
1/4	67	LB1070031
1/8	67	LB1070032
1/3 DALI	20	LB1070065
1/10 0-10V	67	LB1070113
1/10 DALI	67	LB1070114

RNC 770 / RNC Slim 770		
N° max	IP	Code
1/2	20	LB1070029
1/4	20	LB1070030
1/2	67	LB1070031
1/5	67	LB1070032
1/2 DALI	20	LB1070065
1/7 0-10V	67	LB1070113
1/7 DALI	67	LB1070114

RNC 1020 / RNC Slim 1020		
N° max	IP	Code
1/2	20	LB1070030
1/4	67	LB1070032
1 DALI	20	LB1070065
1/5 0-10V	67	LB1070113
1/5 DALI	67	LB1070114

RNC 2020 / RNC Slim 2020		
N° max	IP	Code
1	20	LB1070030
1/2	67	LB1070032
1/2 0-10V	67	LB1070113
1/2 DALI	67	LB1070114





FEATURES

Rimozione RNC con apposite chiavi (non incluse)

Remove RNC with special keys (not included)

Enlèvement du RNC avec des clés spéciales (non incluses)

Desmontaje RNC con llaves especiales (no incluidas)




RNC



RNC SLIM



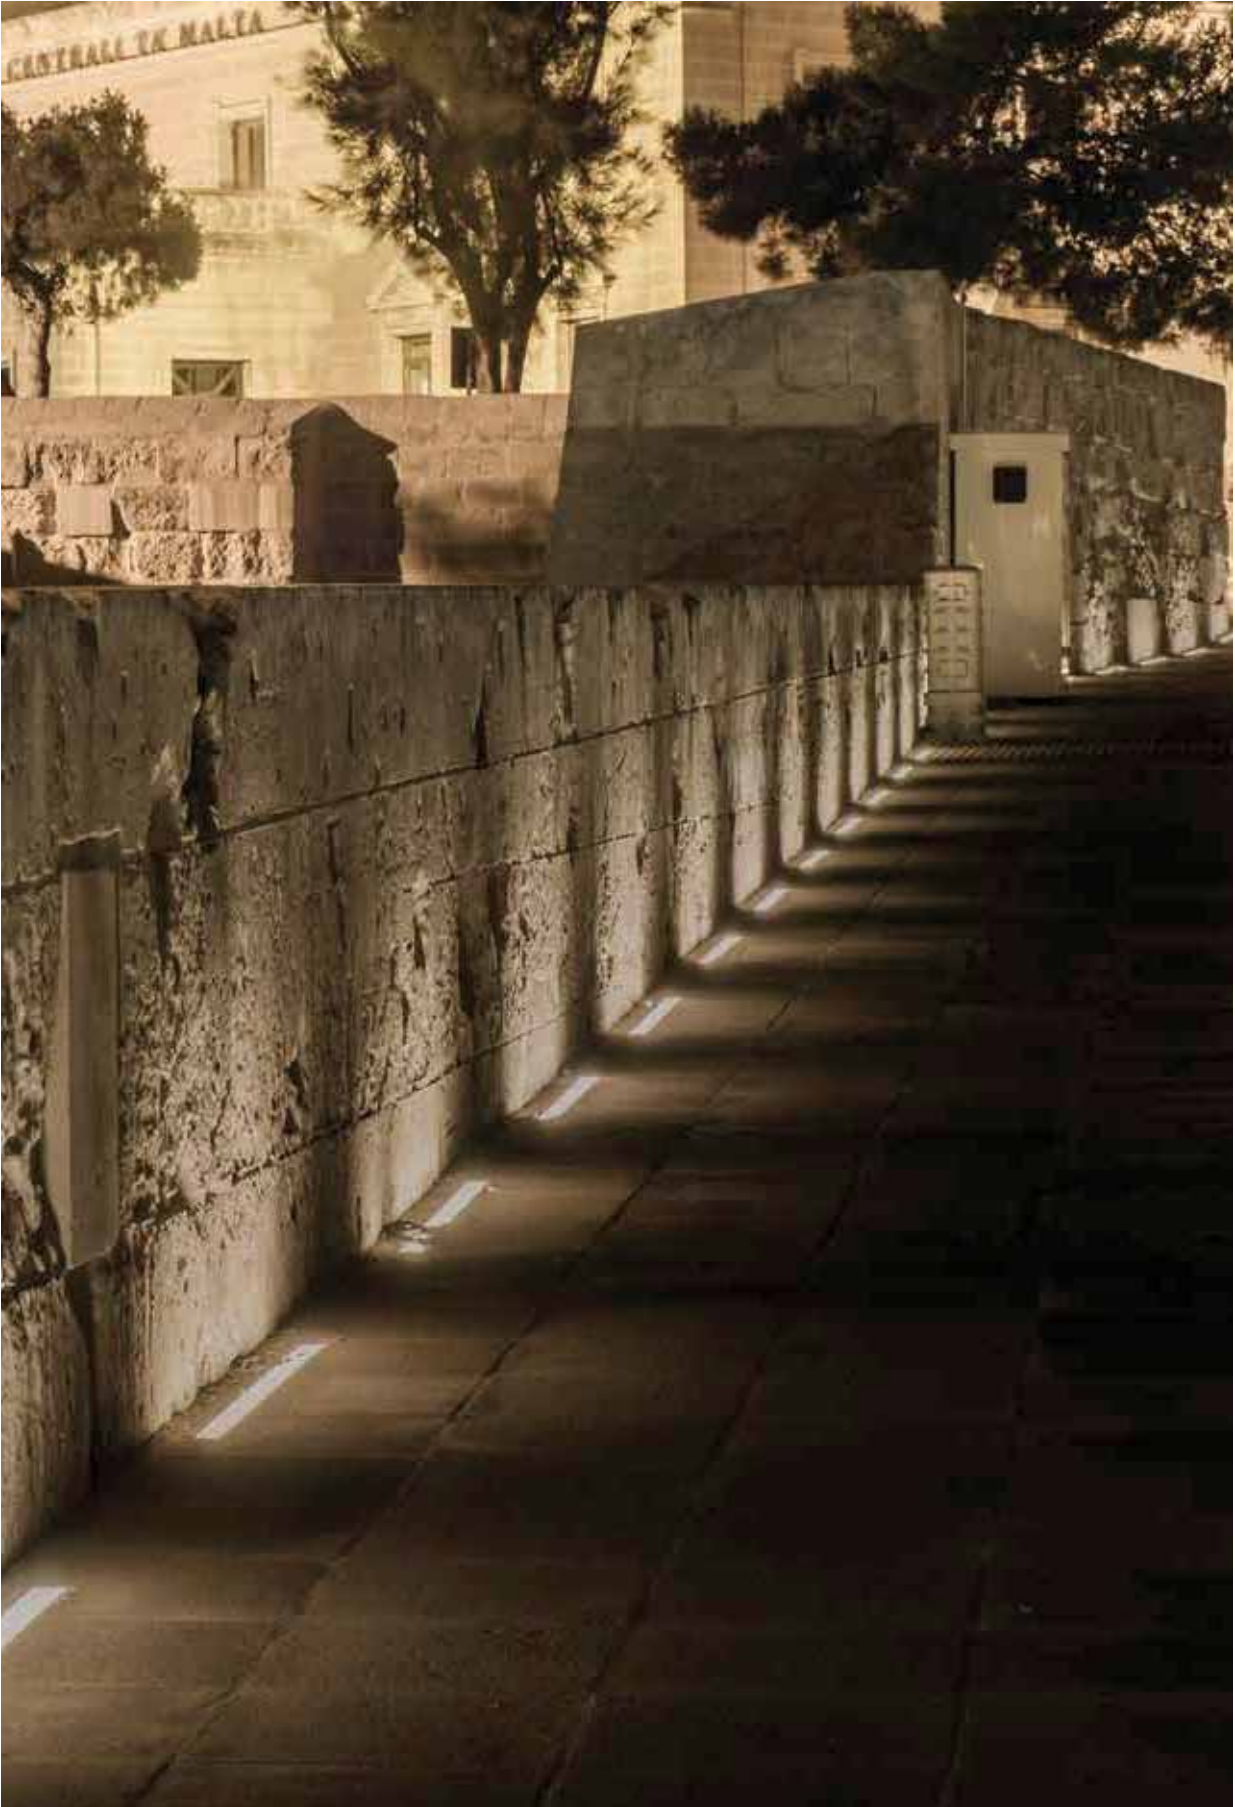

RNC SLIM 1020





RNC 770



RNC 520