


### Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Black Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Serigraphed glass
Optics:	40°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	LM80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	10
Lumen:	1200
Real Lumen:	996
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK EA
Dimming:	Phase cut

Version LL126207 and LL12621S: painted aluminium, sea treatment against salt spray is not included (Bordo Mare).




LL126205M2

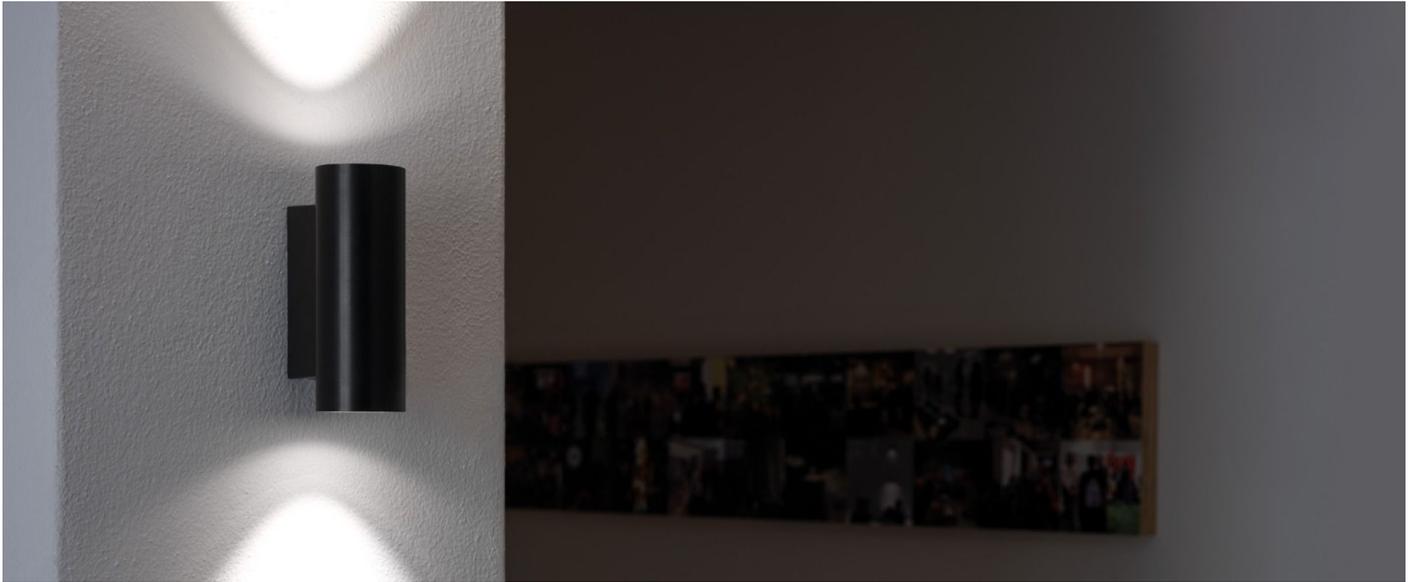

LL126205M2

## Lighting simulation:

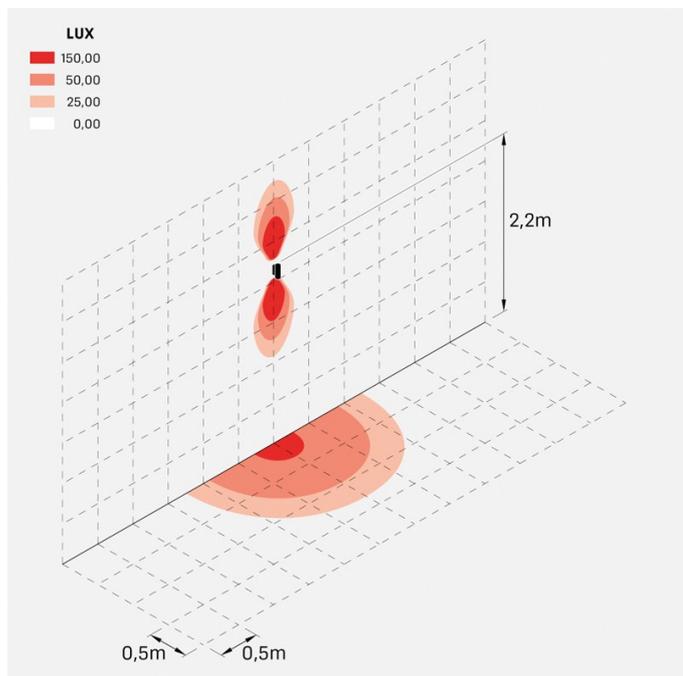

ago\_applique\_10w\_ued\_optic\_m