
Ago Applique U&D

LL126207S3

Lombardo.





Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	White RAL 9010
Treatment:	Anodization
Diffuser type:	Serigraphed glass
Optics:	25°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	LM80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	10
Lumen:	1200
Real Lumen:	996
Power supply:	integrated
LED:	AC DIRECT
Insulation class:	CL.I
Type of protection:	**IP 66**
Resistance to breakage:	**IK 07 2J xx5**
Standards and Marks of Conformity:	CE UKCA
Dimming	Phase cut


Version LL126207 and LL12621S: painted aluminium, sea treatment against salt spray is not included (Bordo Mare).

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ago Applique U&D

LL126207S3

Lombardo.

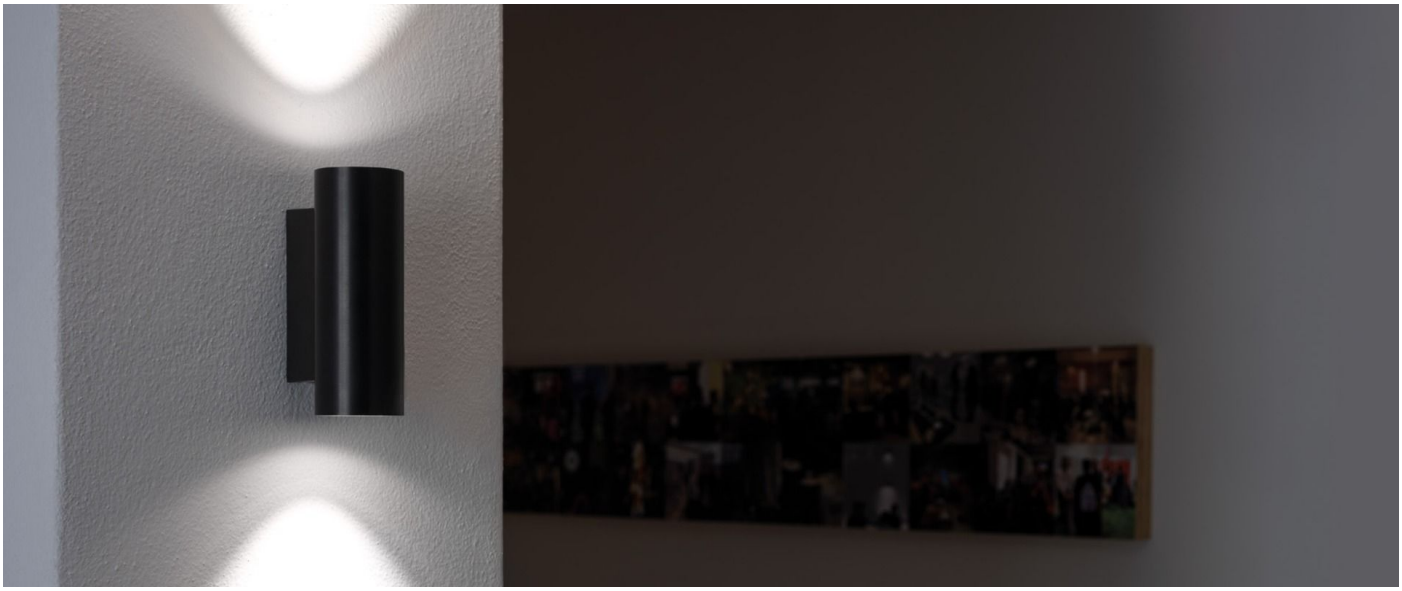




Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ago Applique U&D

LL126207S3

Lombardo.

Lighting simulation:

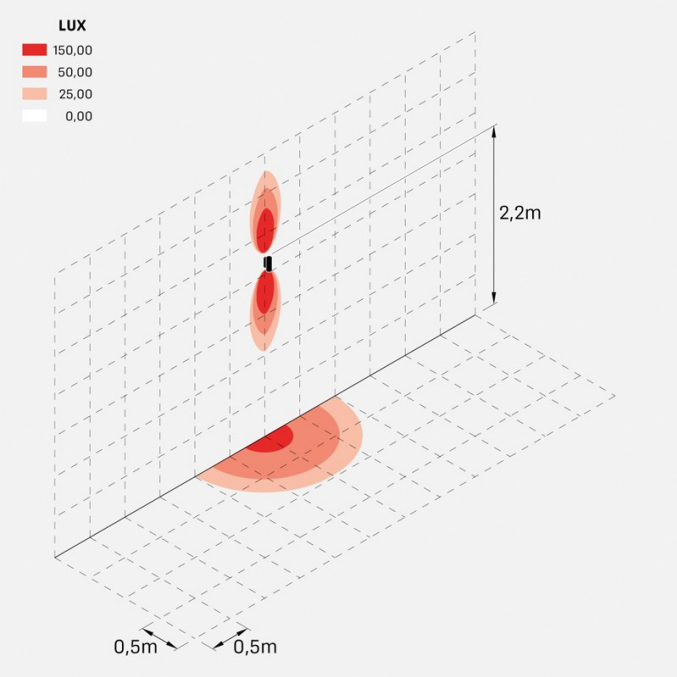

ago_applique_10w_ued_optic_s

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it