

### Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Brown Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Serigraphed glass
Optics:	40°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	LM80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	5
Lumen:	600
Real Lumen:	497
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK EA
Dimming:	Phase cut


Version LL126203 and LL12620S: painted aluminium, sea treatment against salt spray is not included (Bordo Mare).




# Ago Applique

LL126202M3

Lombardo.

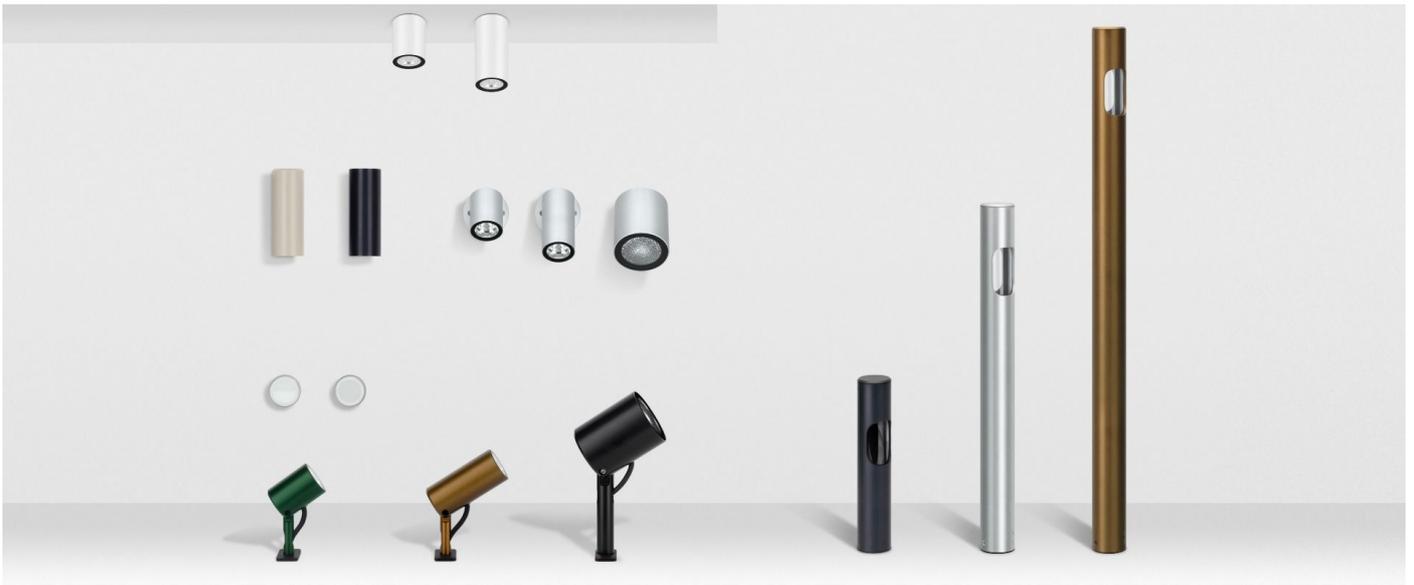

### Lighting simulation:

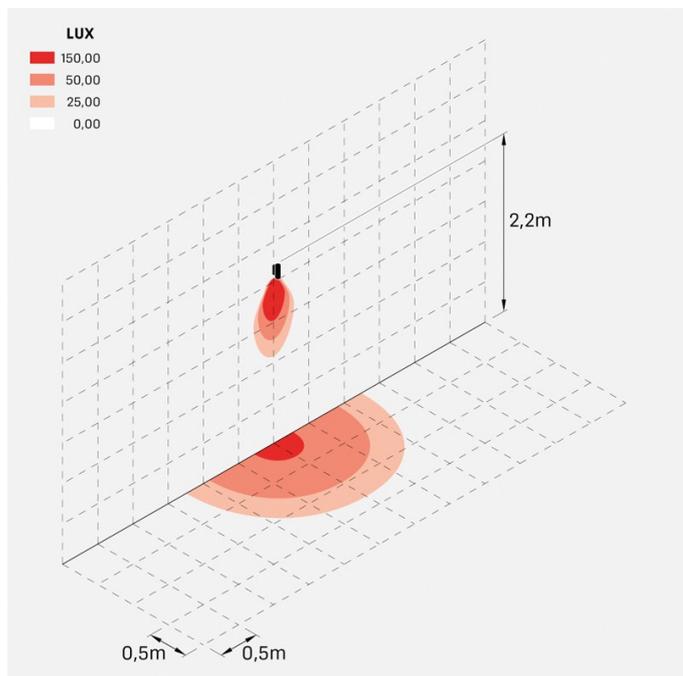

ago\_applique\_5w\_optic\_m