Ago Bollard H900 2L

LL1263133

Lombardo.



Technical information:

Installation:	Ground, Post ground
Material:	Aluminium
Finish:	Black Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	10
Lumen:	1100
Real Lumen:	540
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⏚ CL.I
Type of protection:	**IP 66**
Resistance to breakage:	**IK 07 2J xx5**
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut



Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ago Bollard H900 2L

LL1263133

Lombardo.

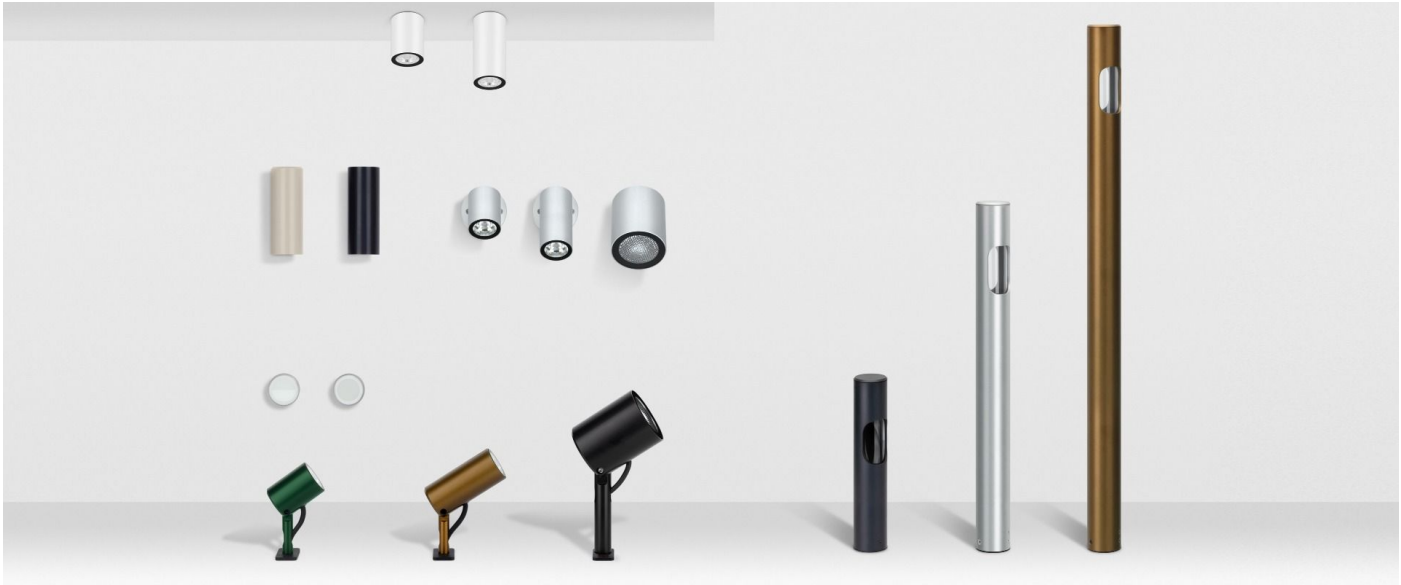

Installation images:

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ago Bollard H900 2L

LL1263133

Lombardo.

Lighting simulation:

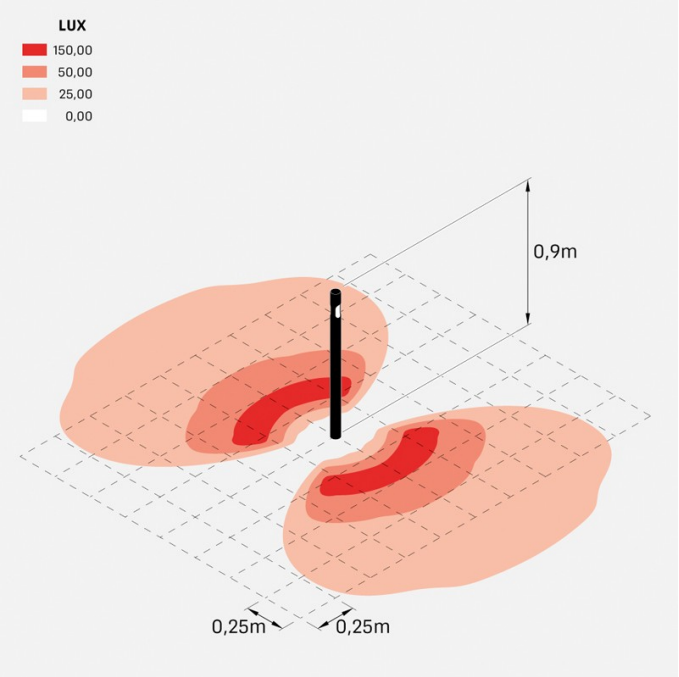

ago_bollard_900_2l

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it