



Technical information:

Installation:	Ground, Spike ground
Material:	Aluminium
Finish:	Grey Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Serigraphed glass
Optics:	40°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	LM80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	6
Lumen:	700
Real Lumen:	568
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK EA
Dimming:	Phase cut

Optic D not available for Honeycomb version. AC-Direct version cable: 0.8m H05RN-F 3x1. Cable 24V version: 0.8m H05RN-F 2x0.75. For the purchase of the product with a longer cable, we recommend the **Standard cable** or the **Anti-rising damp cable**



Ago Garden

LL126000M3

Lombardo.



LL126000M3

Lighting simulation:



ago_garden_optic_D



ago_garden_optic_L




ago_garden_optic_M




ago_garden_optic_S



ago_garden_honeycomb_optic_L

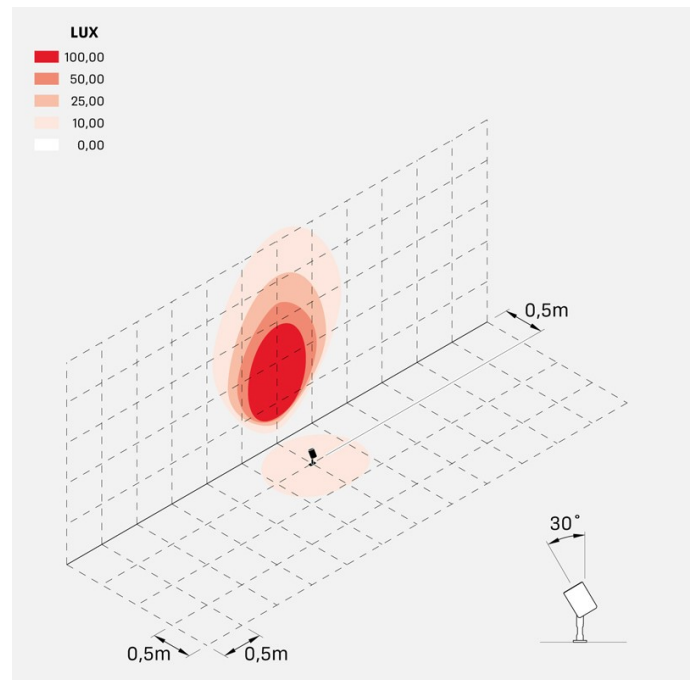

ago_garden_honeycomb_optic_M

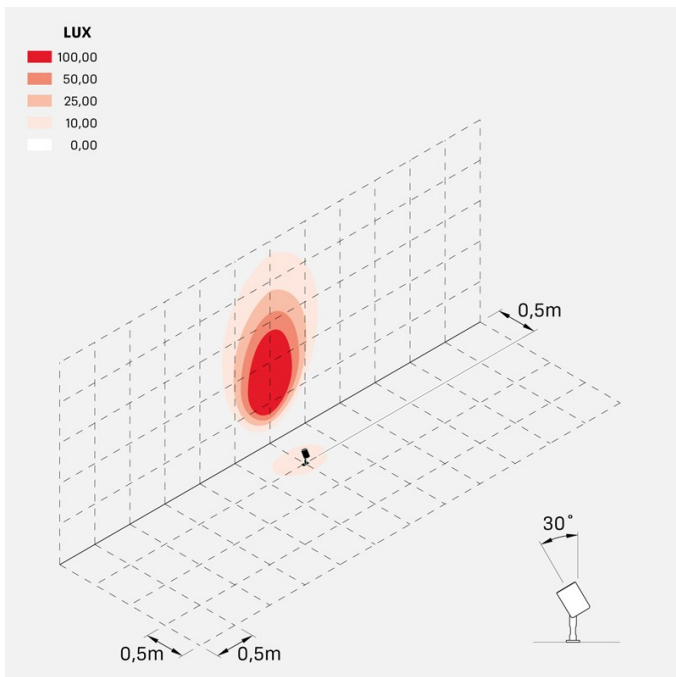

ago_garden_honeycomb_optic_S