


Ago Top Asimmetrico

LL1260153

Lombardo.



Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Brown Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	LM80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	200
Real Lumen:	25
Power supply:	⊗ not included
LED:	24V
Insulation class:	⊠ CL.III
Power cable:	0.30 m H05RN-F 2x0.75
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK EA

Asymmetric version. Cable 0.30m H05RN-F 2x0.75.



Ago Top Asimmetrico

Lombardo.

LL1260153




Ago Top Asimmetrico

LL1260153

Lombardo.

Lighting simulation:

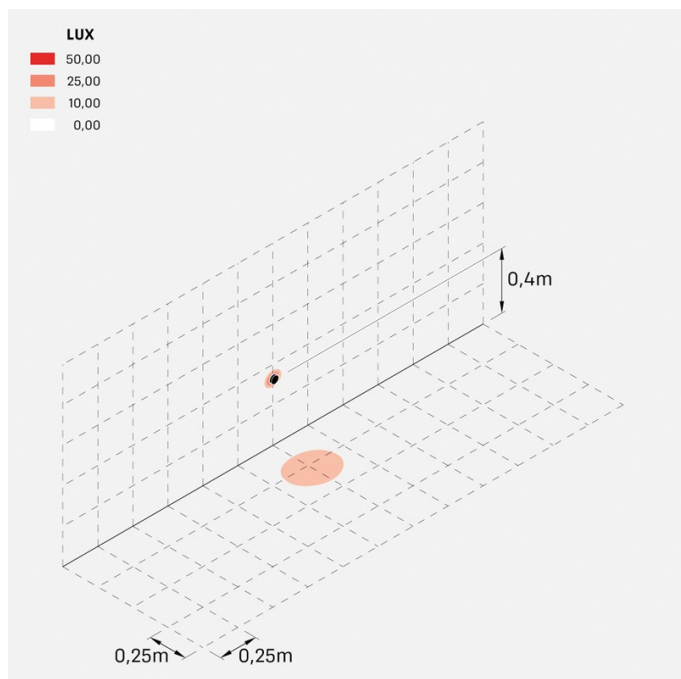

ago_top_asim