
Ago Top

LL1260083

Lombardo.





Technical information:

Installation:	Wall, Ceiling, Surface mounting wall
Material:	Aluminium
Finish:	Grey Anodized Aluminium
Treatment:	Anodization
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	LM80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	200
Real Lumen:	115
Power supply:	⊗ not included
LED:	24V
Insulation class:	CL.III
Power cable:	0.30 m H05RN-F 2x0.75
Type of protection:	**IP 66**
Resistance to breakage:	**IK 07 2J xx5**
Standards and Marks of Conformity:	CE UK CA


Optional: Add the number 4, 5, 6, or 7 to the product code (which already includes the LED color) to order the wired version with the corresponding additional cable; for example, LL1260083 → LL12600834.


Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ago Top

LL1260083

Lombardo.

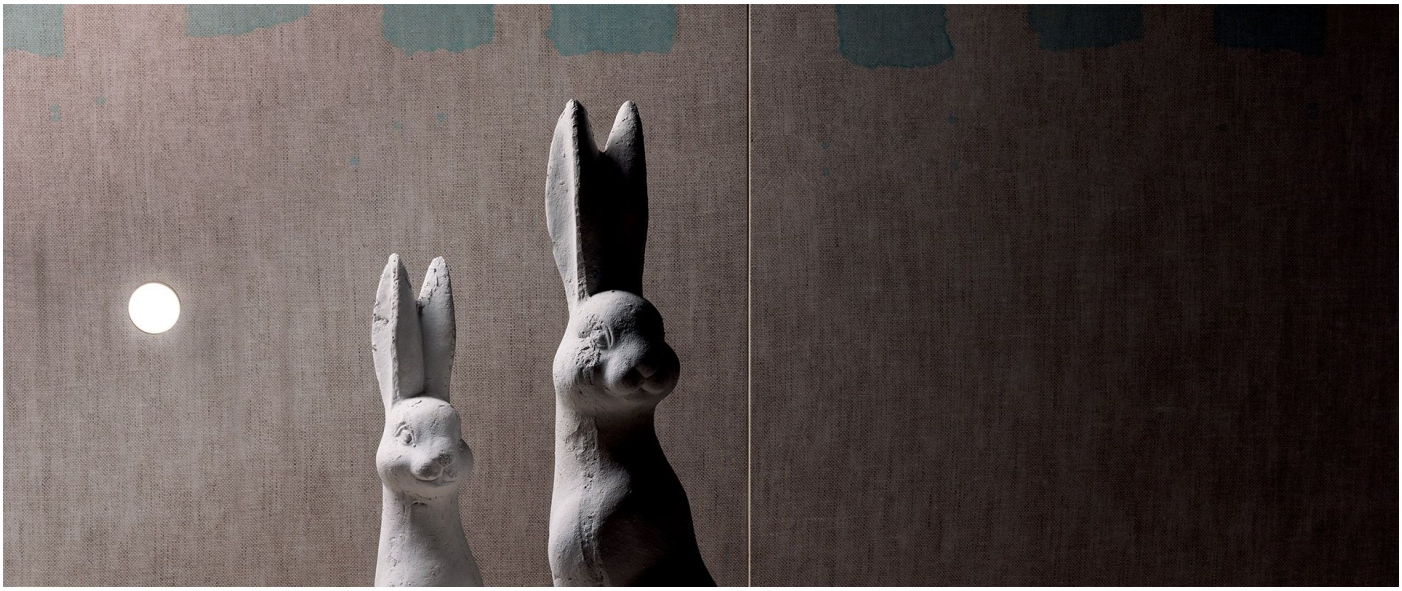

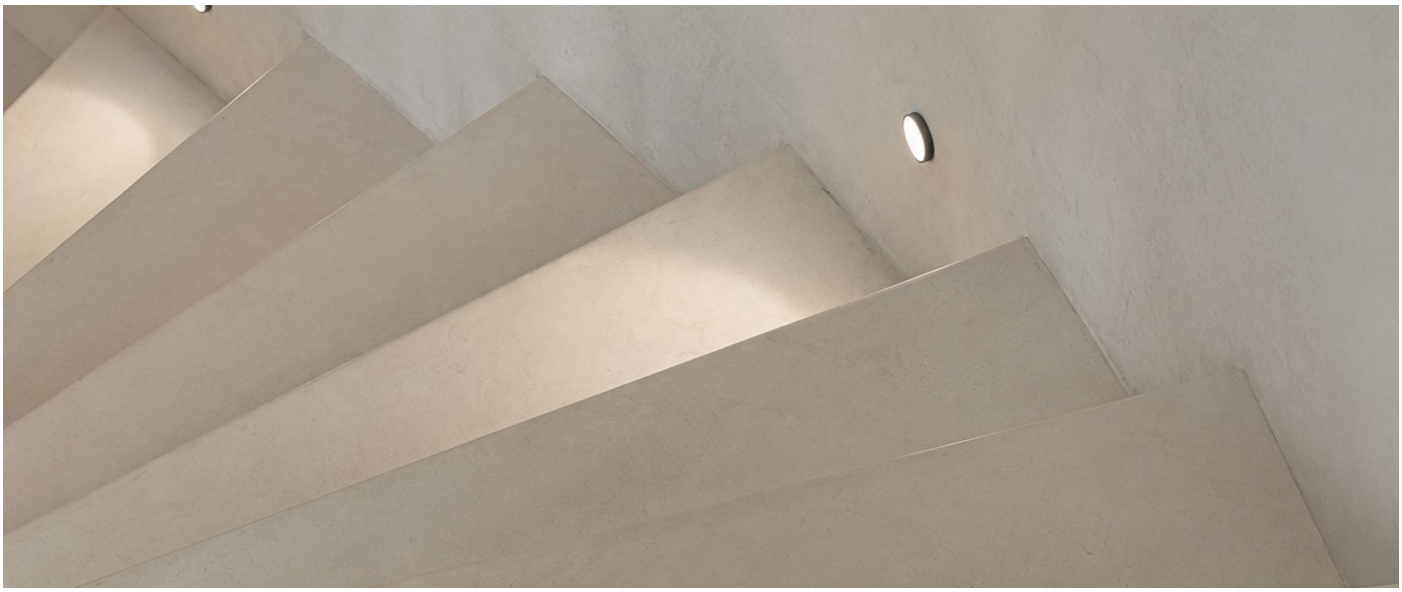


Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Ago Top

LL1260083


Lombardo.

Lighting simulation:

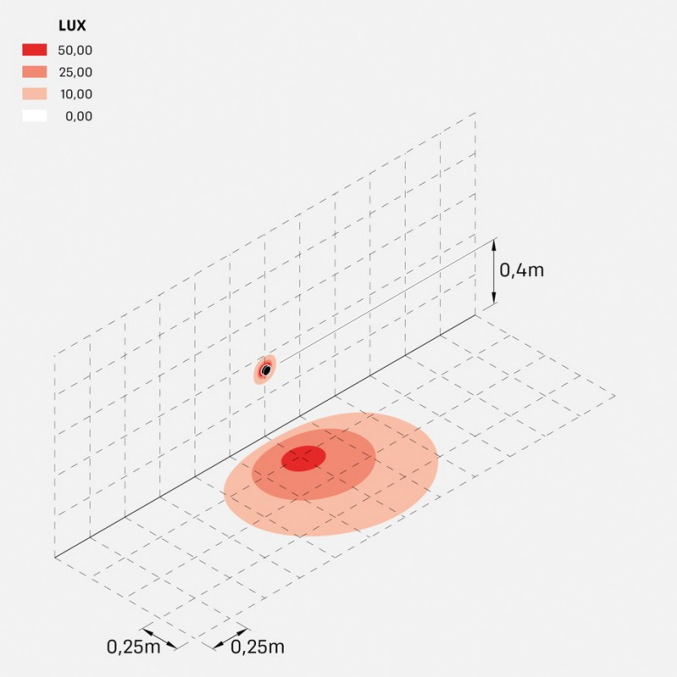

ago_top

Photometric curves:

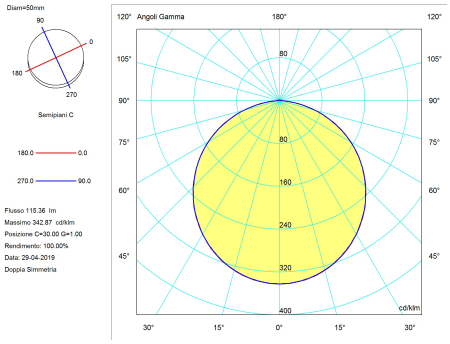

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it