


Ago Wall

LL126006

LOMBARDO



Color: Green Anodized Alluminium

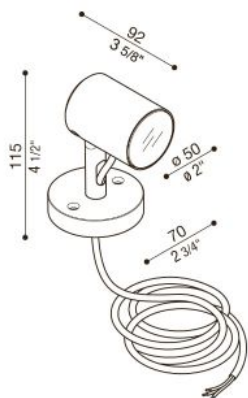

Available colours:

| | |
|---------------------------|-------------------------------------|
| Grey Anodized Alluminium | <input type="checkbox"/> |
| Black Anodized Alluminium | <input type="checkbox"/> |
| Green Anodized Alluminium | <input checked="" type="checkbox"/> |
| Brown Anodized Alluminium | <input type="checkbox"/> |

Technical information:

| | |
|------------------------------------|---|
| Type of product: | Wall, Ceiling |
| Diffuser type: | Serigraphed glass |
| Lamp type: | LED |
| Energy performance class: | A++ |
| Colour temperature: | <input checked="" type="checkbox"/> N 4000K <input checked="" type="checkbox"/> 3 3000K, lm -5% <input checked="" type="checkbox"/> 2 2700K, lm -5% |
| Optics: | <input type="checkbox"/> D Diff. <input type="checkbox"/> S 25° <input type="checkbox"/> M 40° <input type="checkbox"/> L 65° |
| CRI: | >80 |
| LB Factor 50.000 h: | L80B50 |
| Photobiological risk: | RG0 |
| Watt: | 6 |
| Lumen: | 700 |
| Real Lumen: | 568 |
| Power supply: | <input checked="" type="checkbox"/> 220-240 V |
| Insulation class: | <input checked="" type="checkbox"/> CL.I |
| Type of protection: | IP 66 |
| Resistance to breakage: | IK 07 2J xx5 |
| Standards and Marks of Conformity: | CE |
| Pieces per package: | 4 |

Suitable for wall and ceiling installation.

Product description:

Suitable for ground installation and for outdoor use. Body made of EN-6026 anodized aluminum; highly resistant to oxidation due to anodizing treatment. Heat tempered and silk-screen printed glass. Inaccessible device, provided with 1 m prewired power cable HORN-F with epoxy resin treatment. A4 or AISI 316L stainless steel nuts and bolts. Available LED AC direct, phase cut dimmable. Available 24V version. **LED 4000K (N), 3000K (3) or 2700K (2). No risk of photobiological damage, RG0 group (EN62471).**

Ago Wall

LL126006  

LOMBARDO

