


Ago Wall

LL126007

LOMBARDO



Color: **Brown Anodized Alluminium**

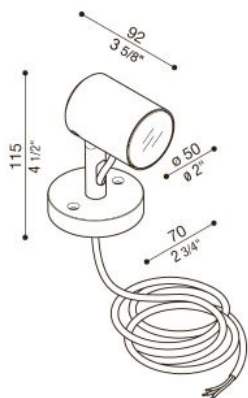

Available colours:

Grey Anodized Alluminium	<input type="checkbox"/>
Black Anodized Alluminium	<input type="checkbox"/>
Green Anodized Alluminium	<input type="checkbox"/>
Brown Anodized Alluminium	<input checked="" type="checkbox"/>

Technical information:

Type of product:	Wall, Ceiling
Diffuser type:	Serigraphed glass
Lamp type:	LED
Energy performance class:	A++
Colour temperature:	<input checked="" type="checkbox"/> N 4000K <input checked="" type="checkbox"/> 3 3000K, lm -5% <input checked="" type="checkbox"/> 2 2700K, lm -5%
Optics:	<input type="checkbox"/> D Diff. <input type="checkbox"/> S 25° <input type="checkbox"/> M 40° <input type="checkbox"/> L 65°
CRI:	>80
LB Factor 50.000 h:	L80B50
Photobiological risk:	RG0
Watt:	6
Lumen:	700
Real Lumen:	568
Power supply:	<input checked="" type="checkbox"/> 220-240 V
Insulation class:	<input checked="" type="checkbox"/> CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE
Pieces per package:	4

Suitable for wall and ceiling installation.

Product description:

Suitable for ground installation and for outdoor use. Body made of EN-6026 anodized aluminum; highly resistant to oxidation due to anodizing treatment. Heat tempered and silk-screen printed glass. Inaccessible device, provided with 1 m prewired power cable HORN-F with epoxy resin treatment. A4 or AISI 316L stainless steel nuts and bolts. Available LED AC direct, phase cut dimmable. Available 24V version. **LED 4000K (N), 3000K (3) or 2700K (2). No risk of photobiological damage, RG0 group (EN62471).**

Ago Wall

LL126007  

LOMBARDO

