


Technical information:

Installation:	Wall, Ceiling
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	10
Lumen:	1100
Real Lumen:	802
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	64-80-90-100
B10 - C10 - B16 - C16	
Insulation class:	□ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA

PMMA DIFFUSER: add P to the end of the selected code including LED colour to have the product supplied with PMMA diffuser (IK 07 2J xx5).




Art 100

LL1160003

Lombardo.



Lighting simulation:

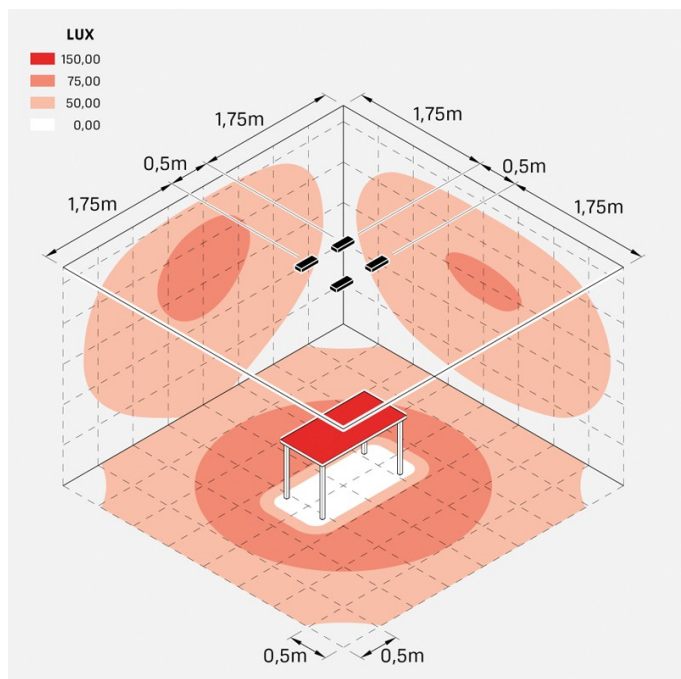

art_100

Photometric curves:

