

Art 250 Mask

LL1161013

Lombardo.



Technical information:

Installation:	Wall, Ceiling
Finish:	White from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	17
Lumen:	2040
Real Lumen:	1296
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	30-38-45-57
B10 - C10 - B16 - C16	
Insulation class:	□ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK



PMMA cover. **PMMA DIFFUSER:** add P to the end of the selected code including LED colour to have the product supplied with PMMA diffuser (IK 07 2J xx5).



Art 250 Mask

LL1161013

Lombardo.

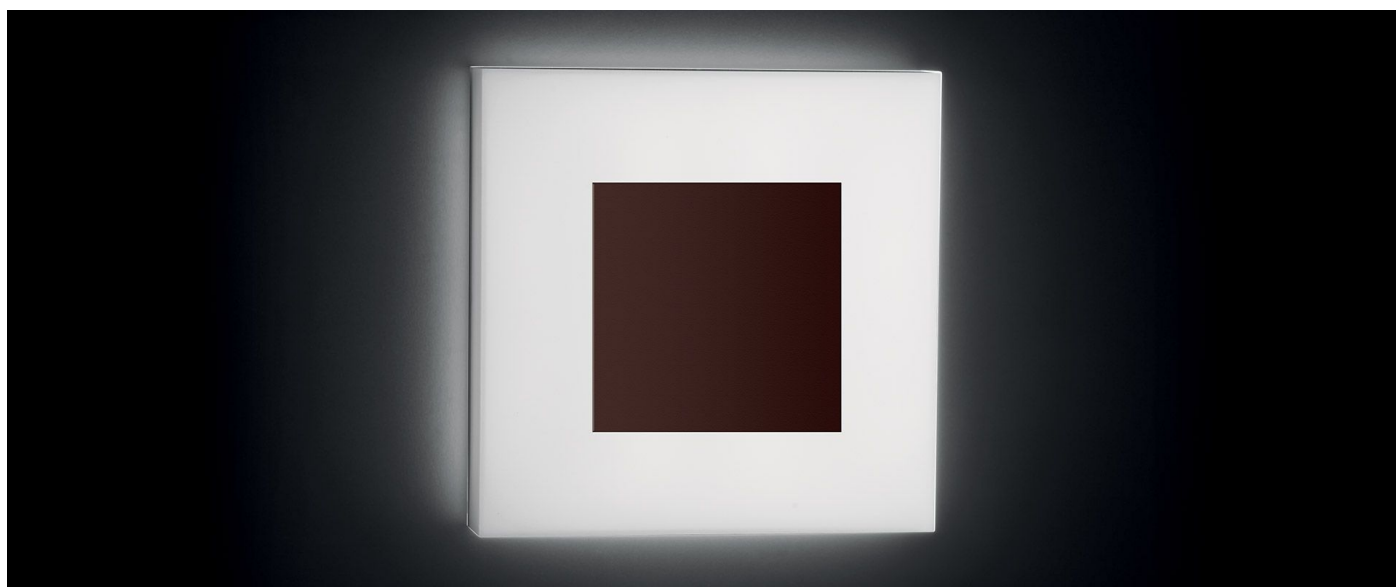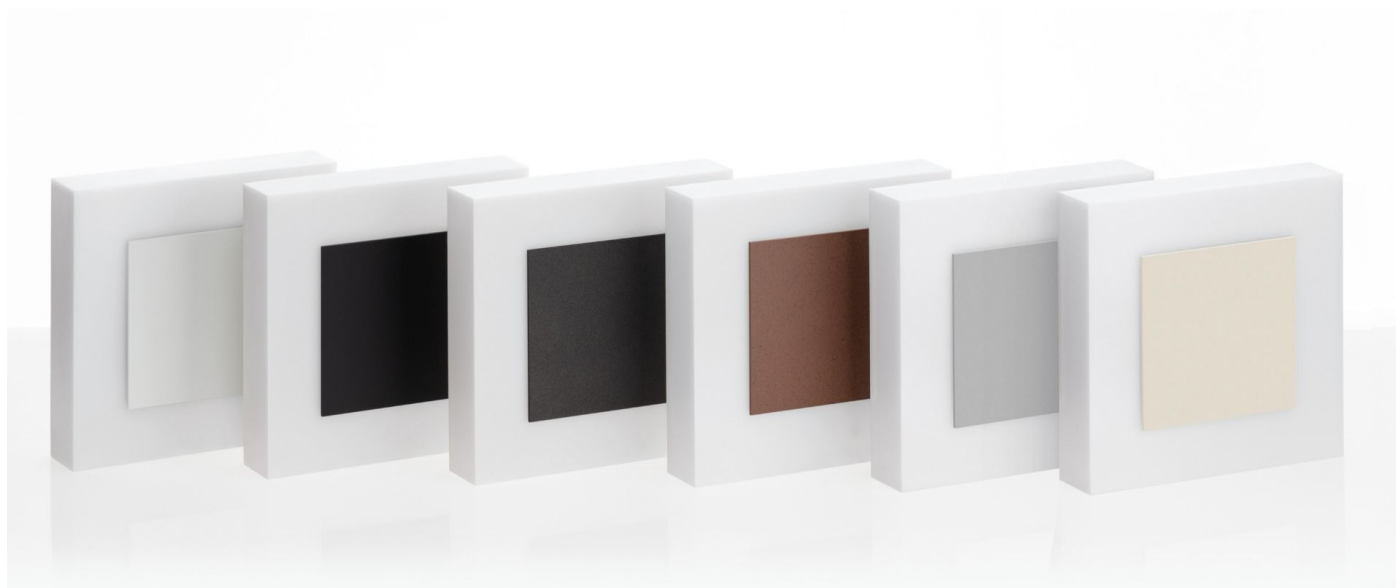


Art 250 Mask

LL1161013


Lombardo.

Lighting simulation:

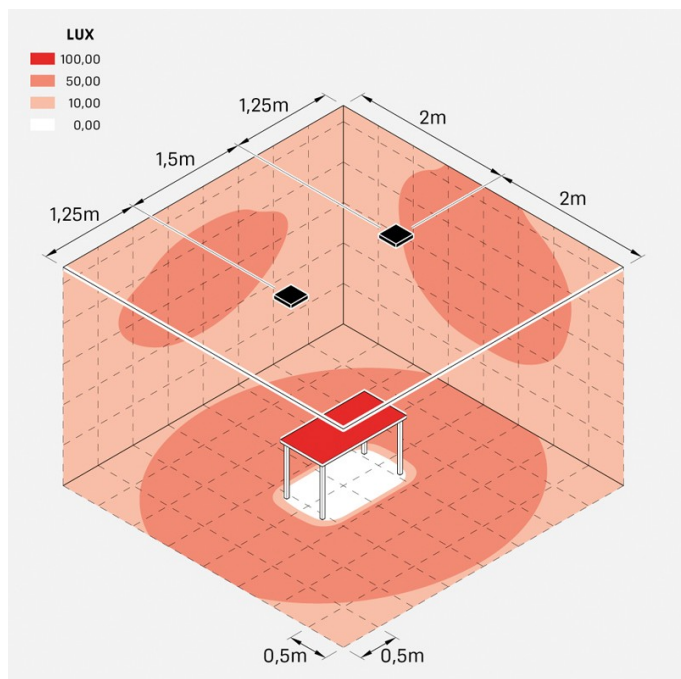

art_250_mask

Photometric curves:

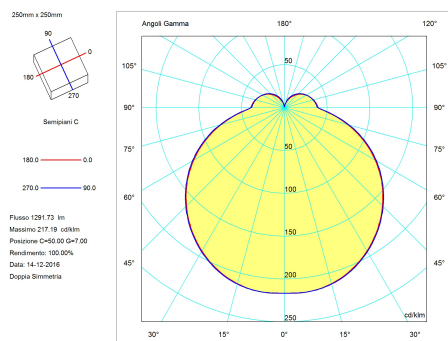

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it