Class Tonda 260

LB5922G

Lombardo.



Technical information:

Installation:	Wall, Ceiling
Finish:	Grey High Tech RAL 9006
Diffuser type:	Polycarbonate
Lamp type:	Lamp
CRI:	>80
Photobiological risk:	RG0
Type of bulb socket:	E27
Lamp max:	1x75
CFL:	1x15
Version with:	NOT INC. Suitable for motion sensor/Day and night sensor
Insulation class:	CL.II
Type of protection:	**IP 65**
Resistance to breakage:	**IK 10 20J xx9**
Standards and Marks of Conformity:	CE UK CA

Polycarbonate diffuser. Silicone gasket. Lamp max. dim: E27 128 mm Ø 48 mm.





Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Class Tonda 260

LB5922G

Lombardo.

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Class Tonda 260

LB5922G

Lombardo.

Photometric curves:

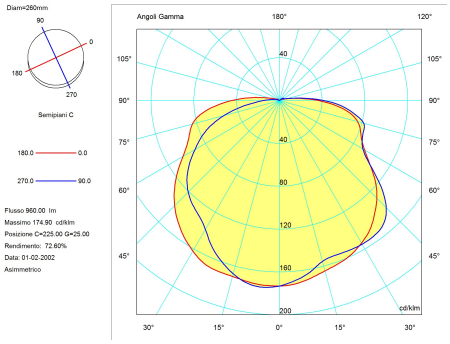

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it