


CNC 150

LL136000MN

Lombardo.



Technical information:

Installation:	Ground recess
Material:	Aluminium
Finish:	Brushed grey
Diffuser type:	Serigraphed glass
Optics:	24°
Lamp type:	LED
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	20
Lumen:	2800
Real Lumen:	2480
Power supply:	⊗ not included
LED:	600mA - 35V
Insulation class:	⬡ CL.III
Power cable:	0.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	⬇ 2000 ^{KG} _{MAX} ⬆ 58°C _{MAX}

24V version available on request.



CNC 150

LL136000MN

Lombardo.




Lombardo S.r.l.


Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it


Lighting simulation:

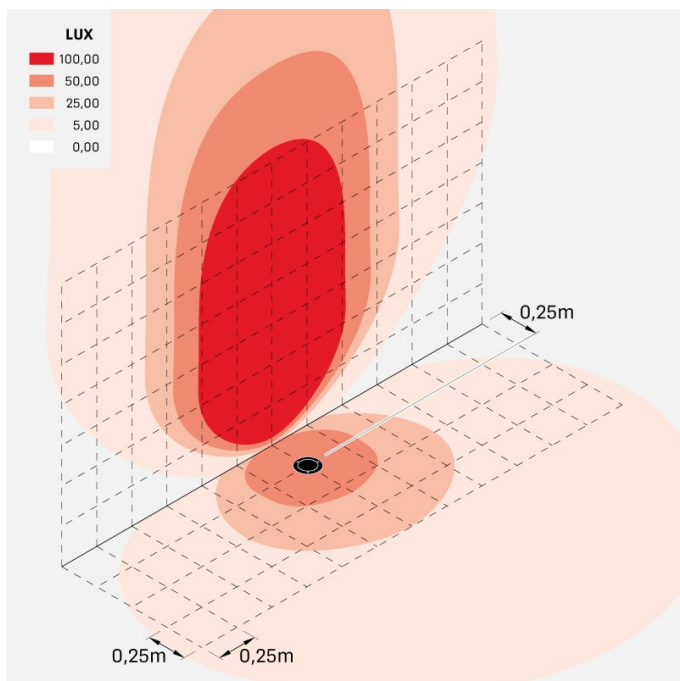

cnc_150_I

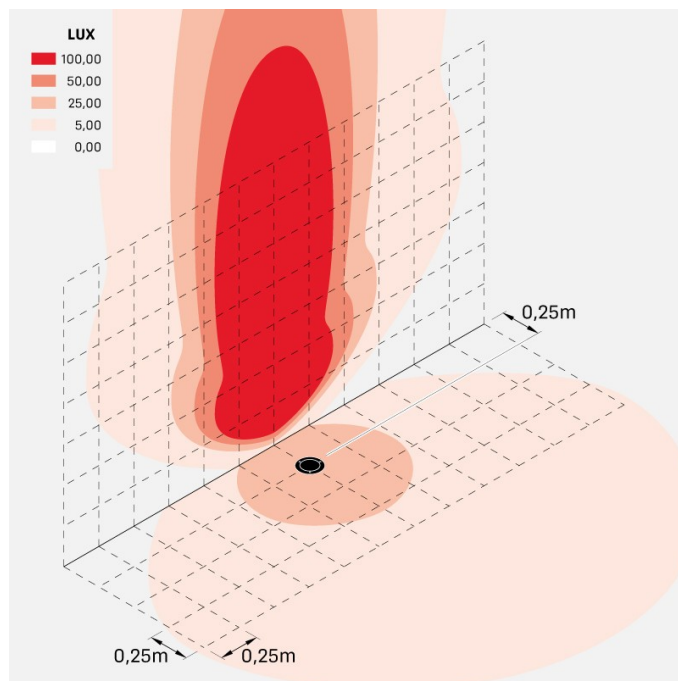

cnc_150_m

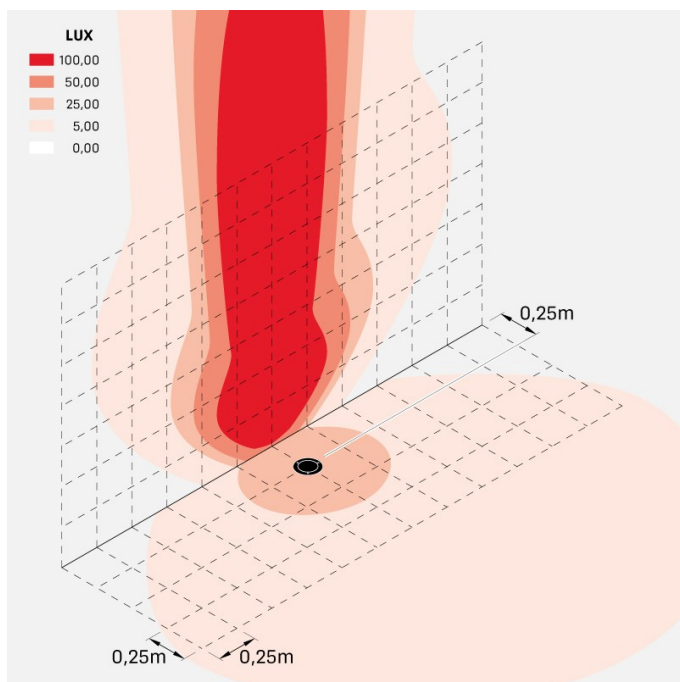


cnc_150_s

CNC 150

LL136000MN

Lombardo.

Photometric curves:

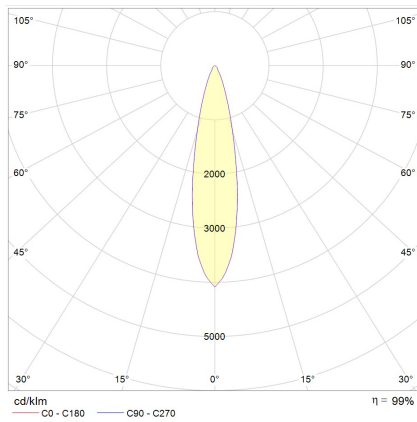

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it