


Technical information:

Installation:	Wall recess, Ceiling recess, Ground recess
Material:	Stainless steel AISI316L
Finish:	Polished stainless steel
Diffuser type:	Transparent glass
Optics:	Diff.
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	180
Real Lumen:	Max 148
Power supply:	⊗ not included
LED:	500mA - 4.8V
Insulation class:	⊖ CL.III
Power cable:	1.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	↓ 500 ^{KG} MAX ↑ 65 ^{°C} MAX


Suitable for installation in standard Ø 25 mm corrugated duct.




Lighting simulation:

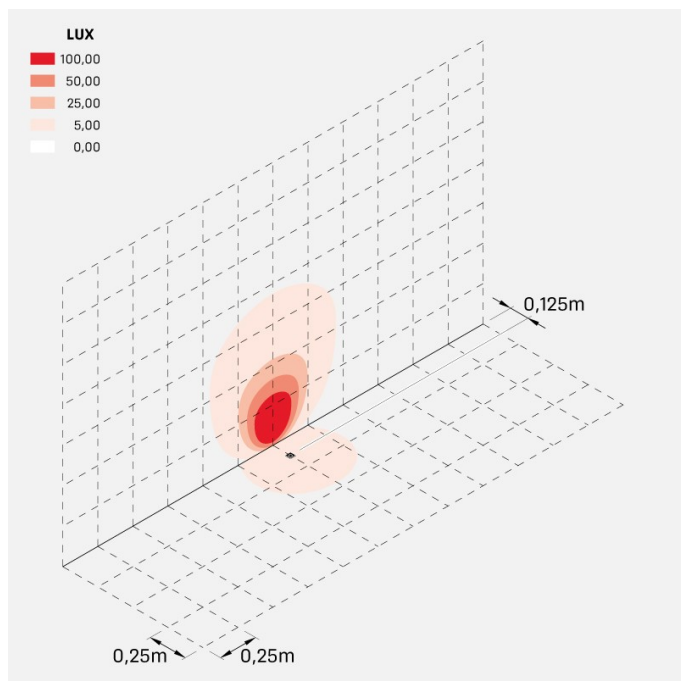

cnc_25q_d

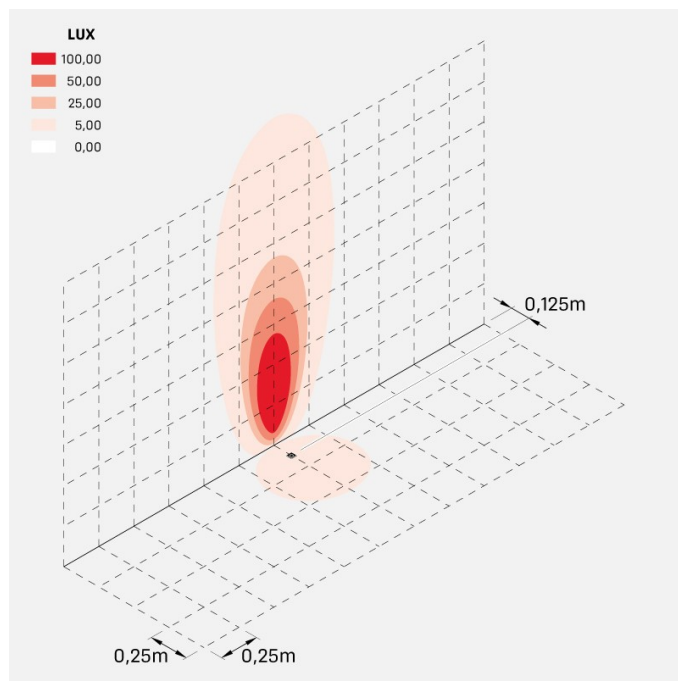

cnc_25q_m

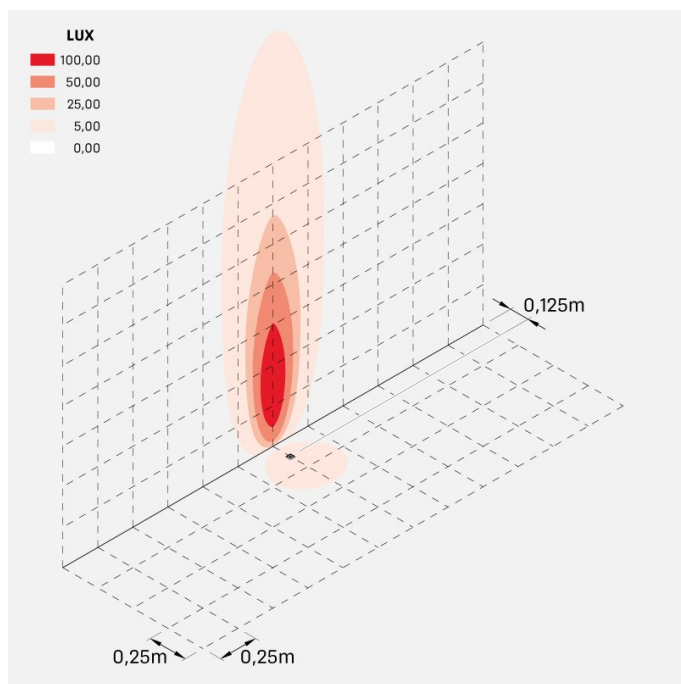

cnc_25q_s