


CNC 35 Swing

LL107005D3

Lombardo.

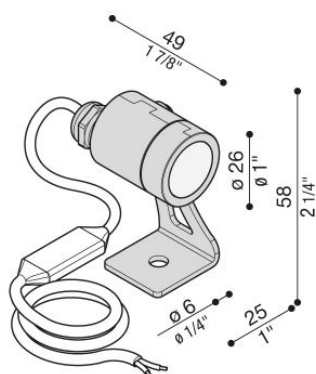

Technical information:

Installation:	Wall, Ground
Material:	Stainless steel AISI316L
Finish:	Polished stainless steel
Diffuser type:	Transparent glass
Optics:	Diff.
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	2
Lumen:	180
Real Lumen:	Max 148
Power supply:	⊗ not included
LED:	500mA - 4.8V
Insulation class:	⬢ CL.III
Power cable:	1.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK CA
Additional features:	⚡ 65°C_{MAX}

Swivel version. Stake not included.




CNC 35 Swing

LL107005D3


Lombardo.




Lighting simulation:

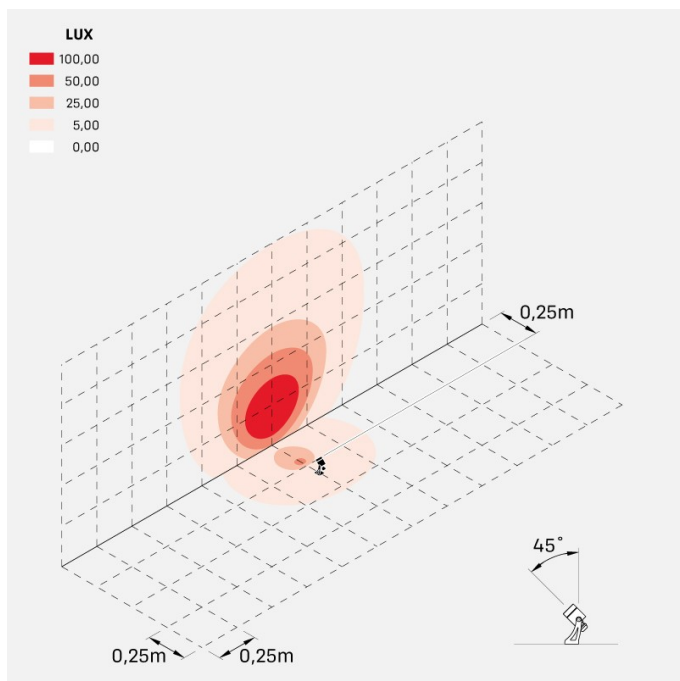


cnc_35_swing_d

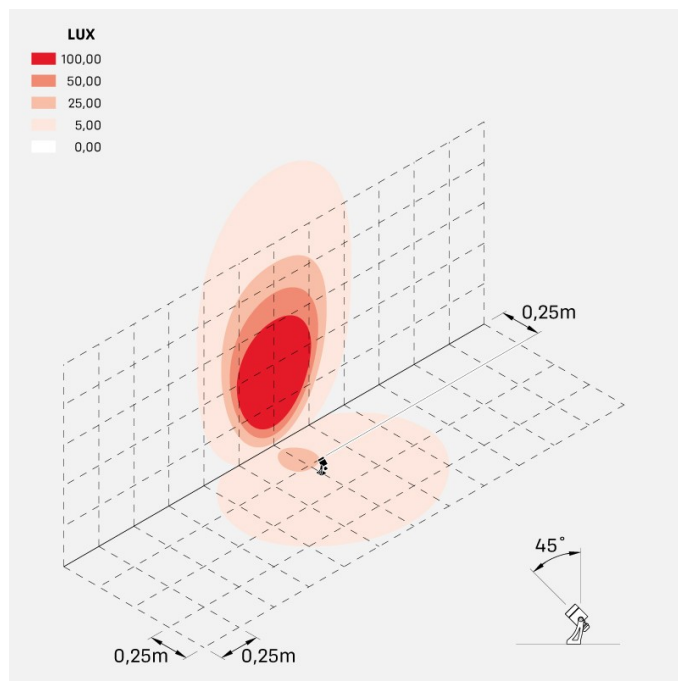

cnc_35_swing_l

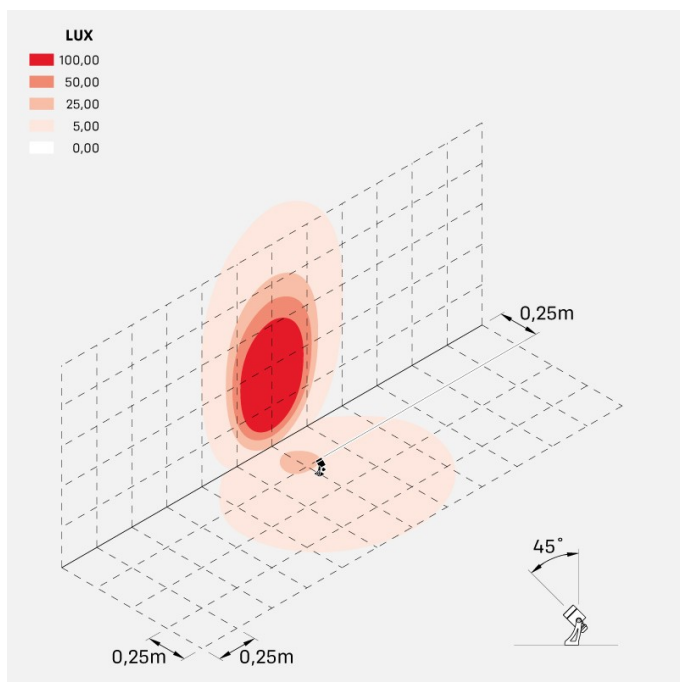

cnc_35_swing_m

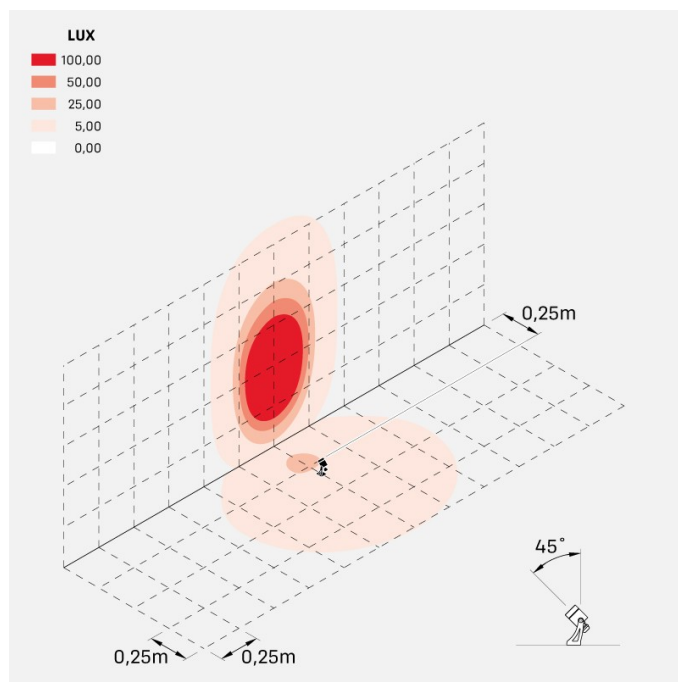

cnc_35_swing_s