


CNC 50 T

LL107042L3

Lombardo.

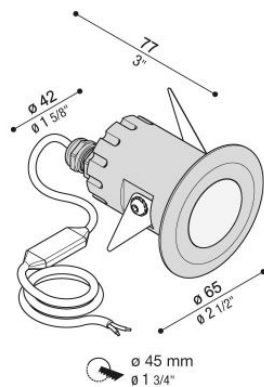


Technical information:

Installation:	Wall recess, Ceiling recess, Ground recess
Material:	Stainless steel AISI316L
Finish:	Grey anthracite RAL 7021
Diffuser type:	Transparent glass
Optics:	53°
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	6,5
Lumen:	650
Real Lumen:	Max 427
Power supply:	⊗ not included
LED:	24V
Insulation class:	⬡ CL.III
Power cable:	1.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	↓ 500 KG MAX ⚡ 65°C MAX



Lighting simulation:

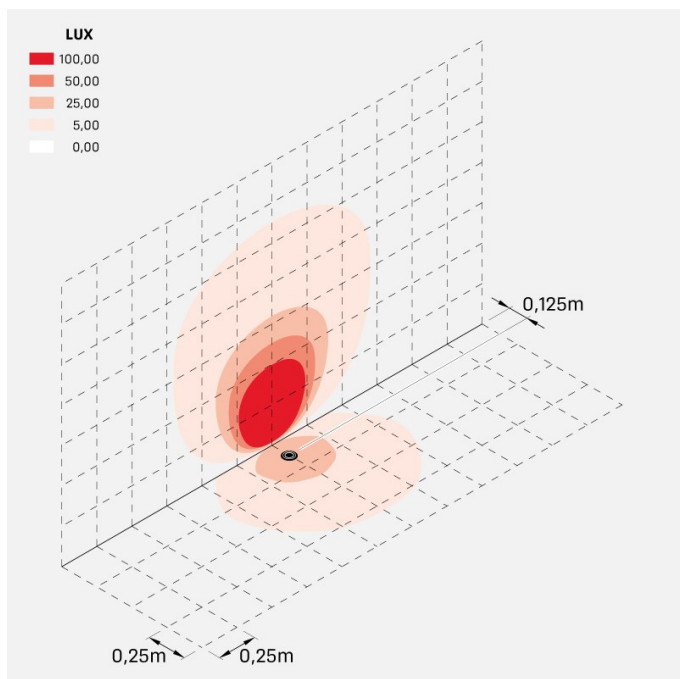

cnc_50t_d



cnc_50t_l



cnc_50t_m



cnc_50t_s