


# Dodo 100 Full

LL14304D2


**Lombardo.**

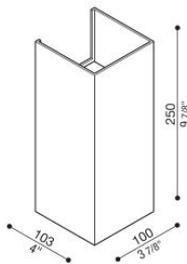

## Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	8
Lumen:	1180
Real Lumen:	170
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	⊖ CL.I
Type of protection:	<b>IP 54</b>
Resistance to breakage:	<b>IK 10 20J xx9</b>
Standards and Marks of Conformity:	CE UK EA


Available light beams: 30°, 45°, 60°, 75°, 90°, adjustable with fins.



# Dodo 100 Full

LL14304D2

Lombardo.

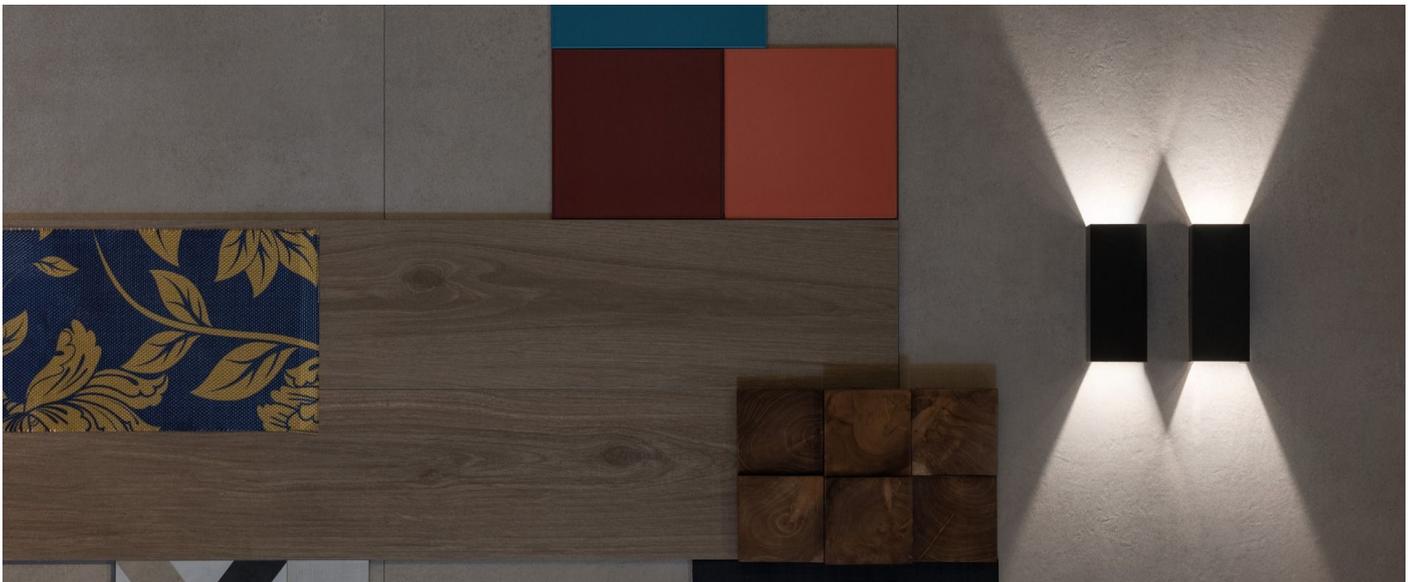

## Installation images:




# Dodo 100 Full


Lombardo.

LL14304D2


## Lighting simulation:

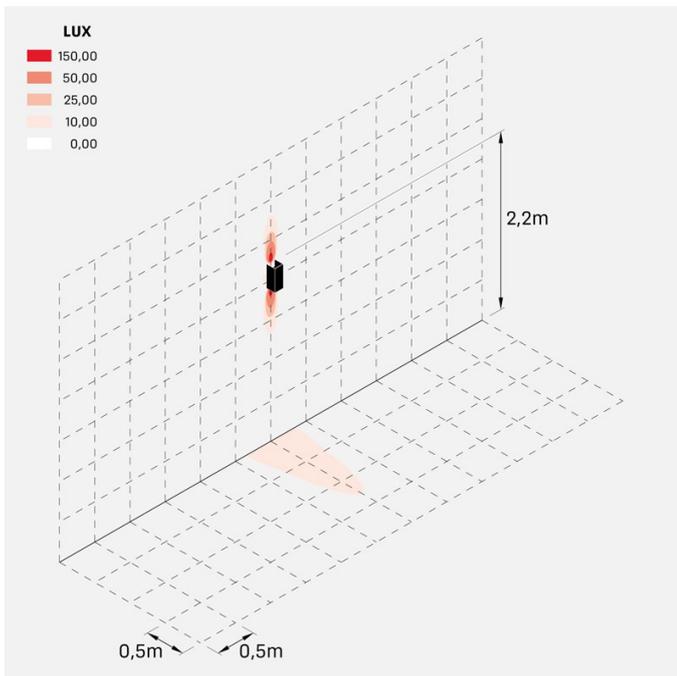


dodo\_100\_full\_30

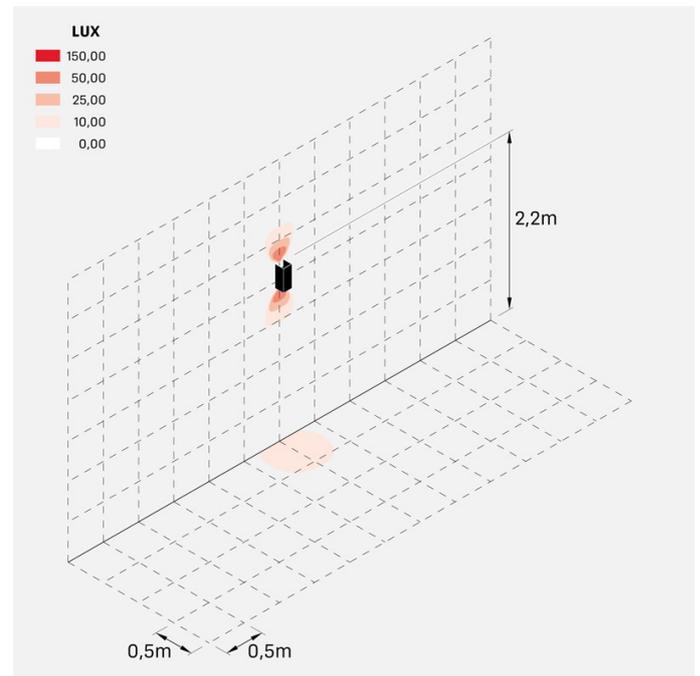

dodo\_100\_full\_45

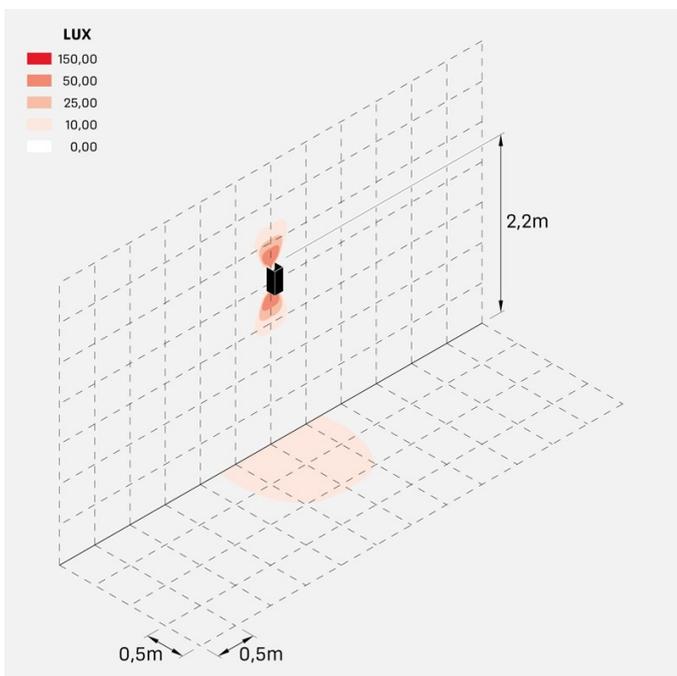

dodo\_100\_full\_60

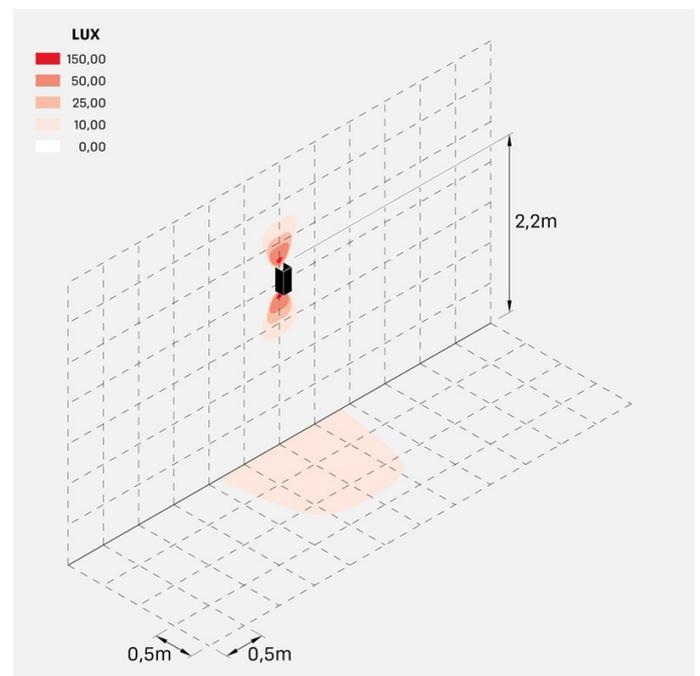


dodo\_100\_full\_75

# Dodo 100 Full




Lombardo.

LL14304D2

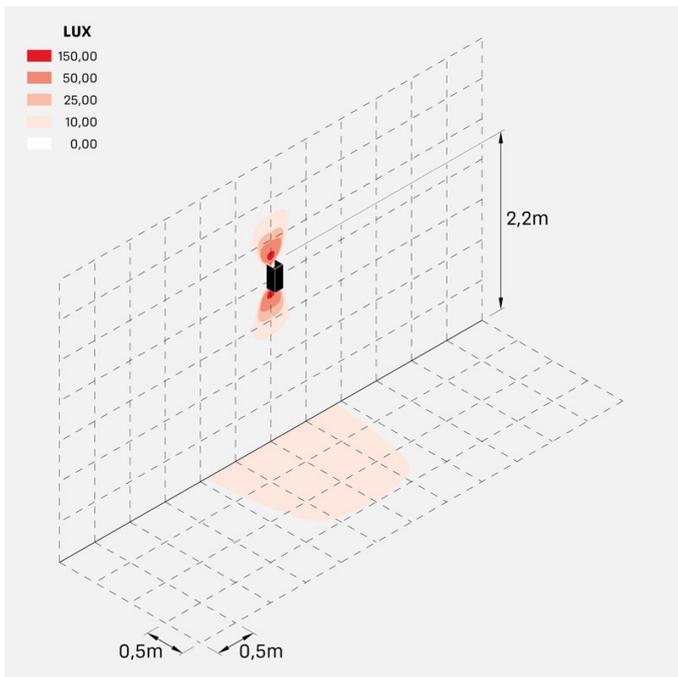

dodo\_100\_full\_90

## Photometric curves:

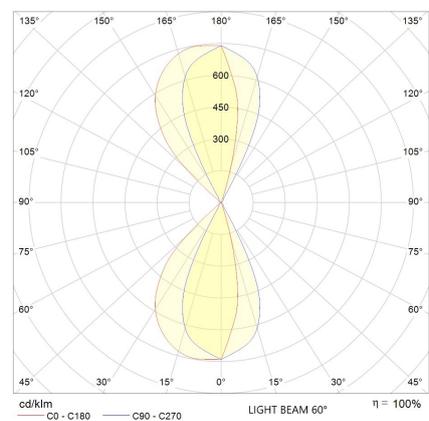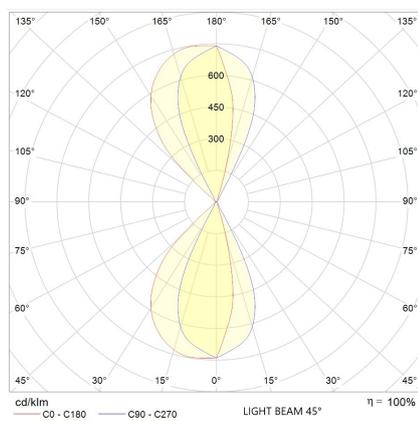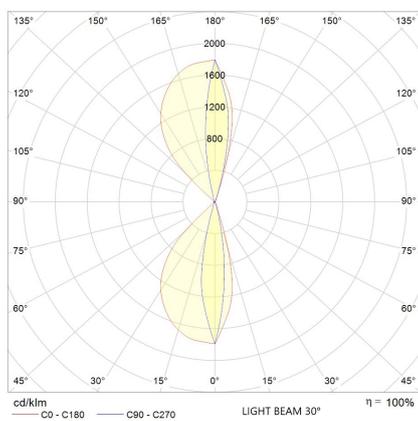

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**

# Dodo 100 Full

LL14304D2

Lombardo.

