


Dodo 100 Full

LL14304D3

Lombardo.



Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	8
Lumen:	1180
Real Lumen:	170
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 54
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA


Available light beams: 30°, 45°, 60°, 75°, 90°, adjustable with fins.



Dodo 100 Full

LL14304D3

Lombardo.

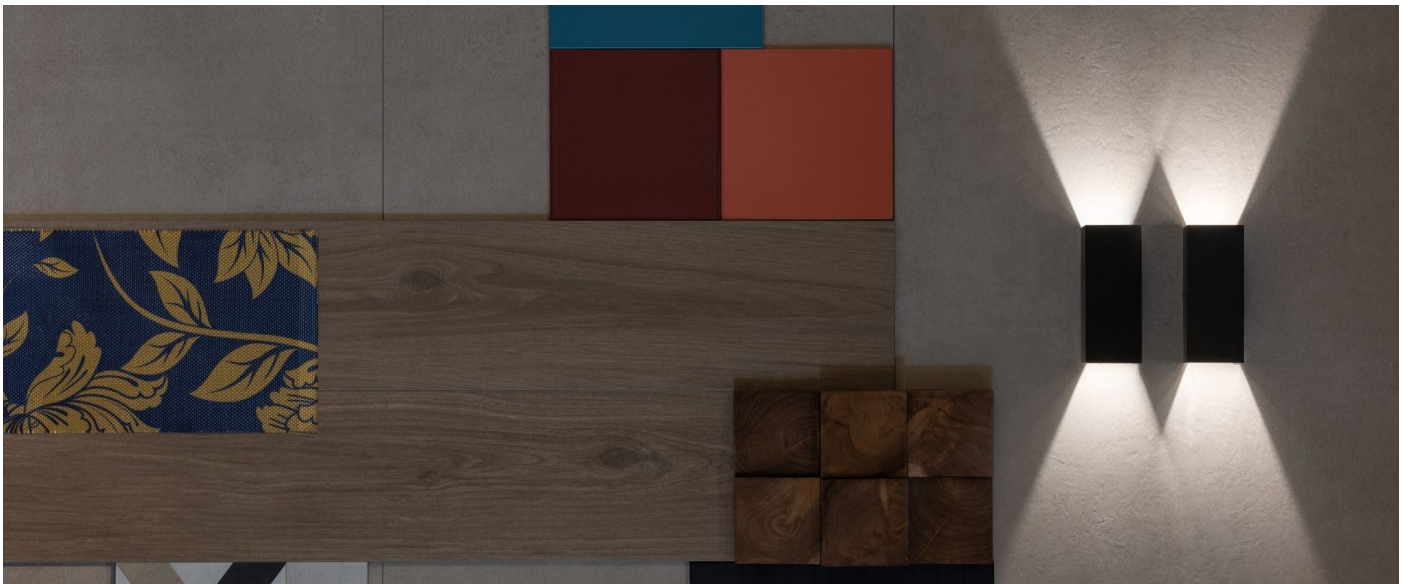


Installation images:




LL14304D3


Lighting simulation:

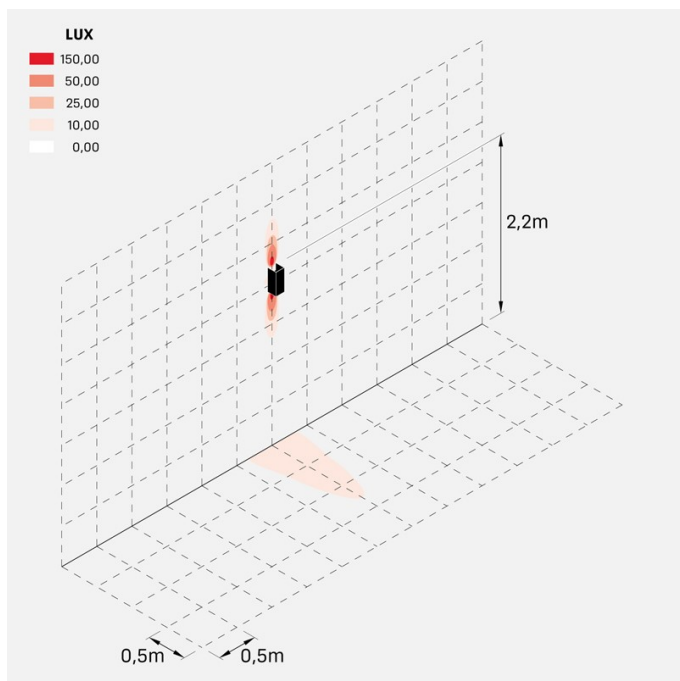


dodo_100_full_30

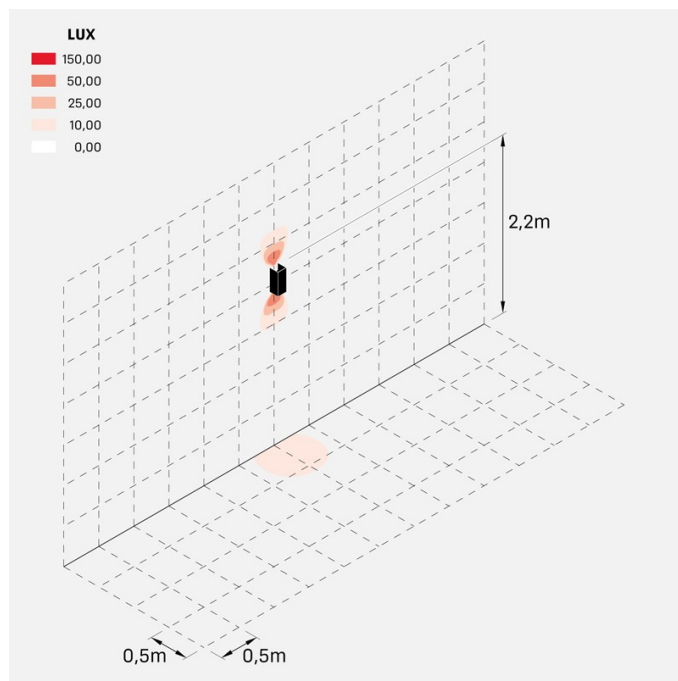

dodo_100_full_45

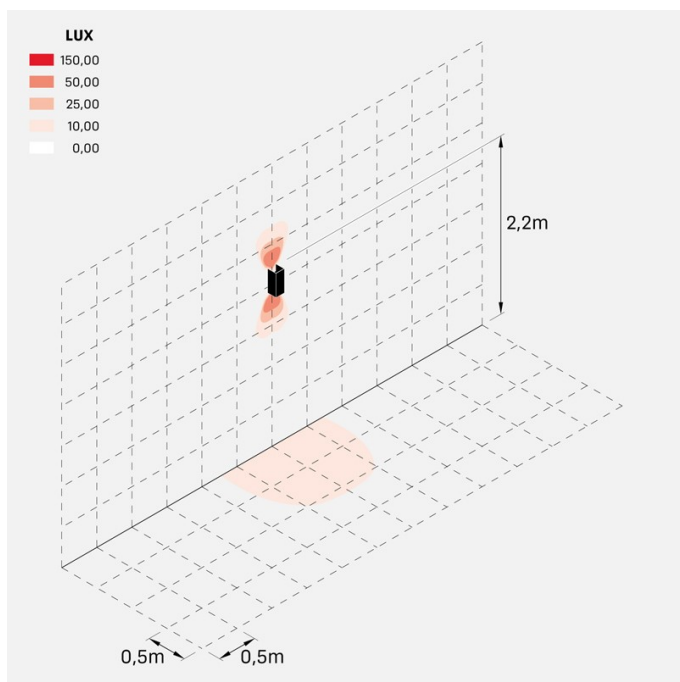

dodo_100_full_60

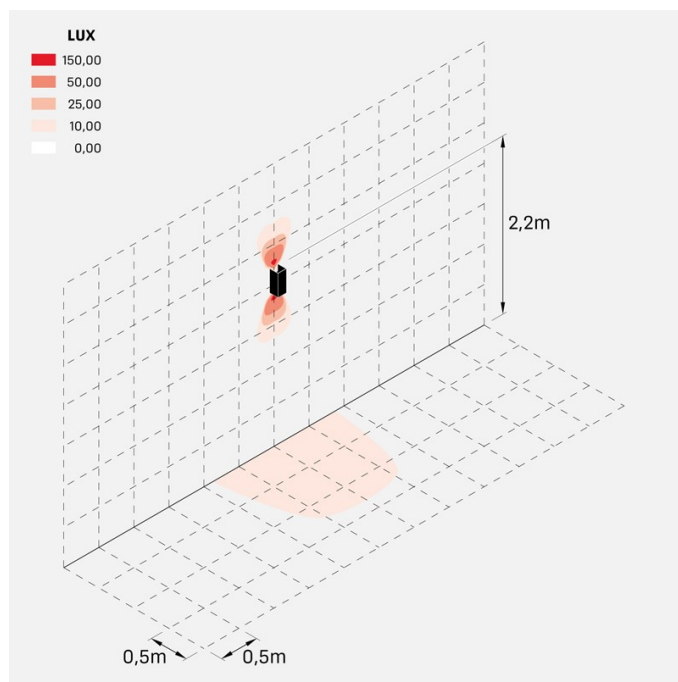


dodo_100_full_75

Dodo 100 Full




LL14304D3

Lombardo.

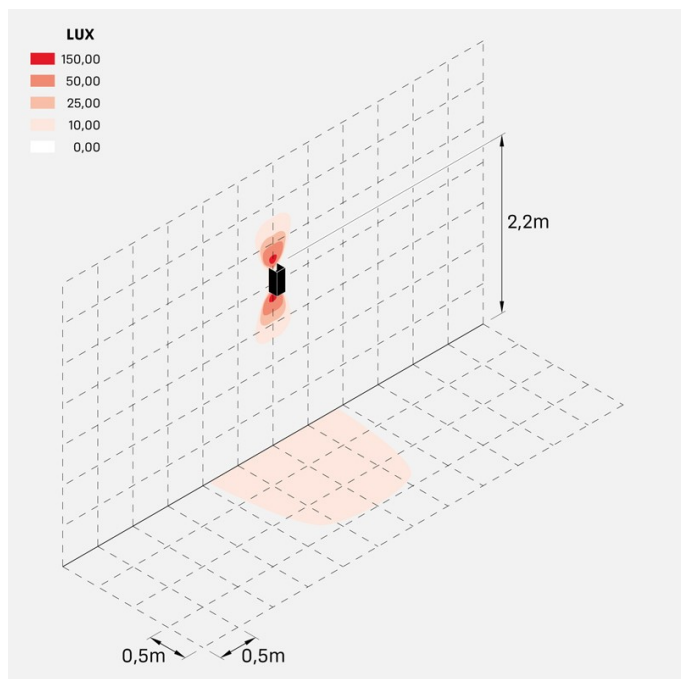

dodo_100_full_90

Photometric curves:

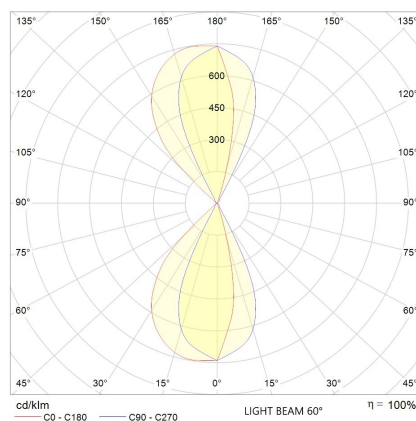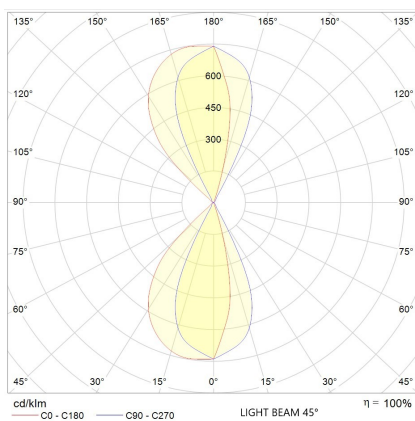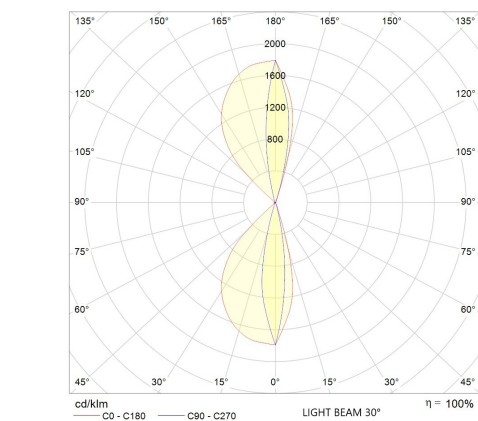

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

Dodo 100 Full

LL14304D3

Lombardo.

