


Technical information:

Installation:	Wall
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	E
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	8
Lumen:	1180
Real Lumen:	350
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 54
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK EA


Available light beams: 30°, 45°, 60°, 75°, 90°, adjustable with fins.



Dodo 100

LL14303D2


Lombardo.

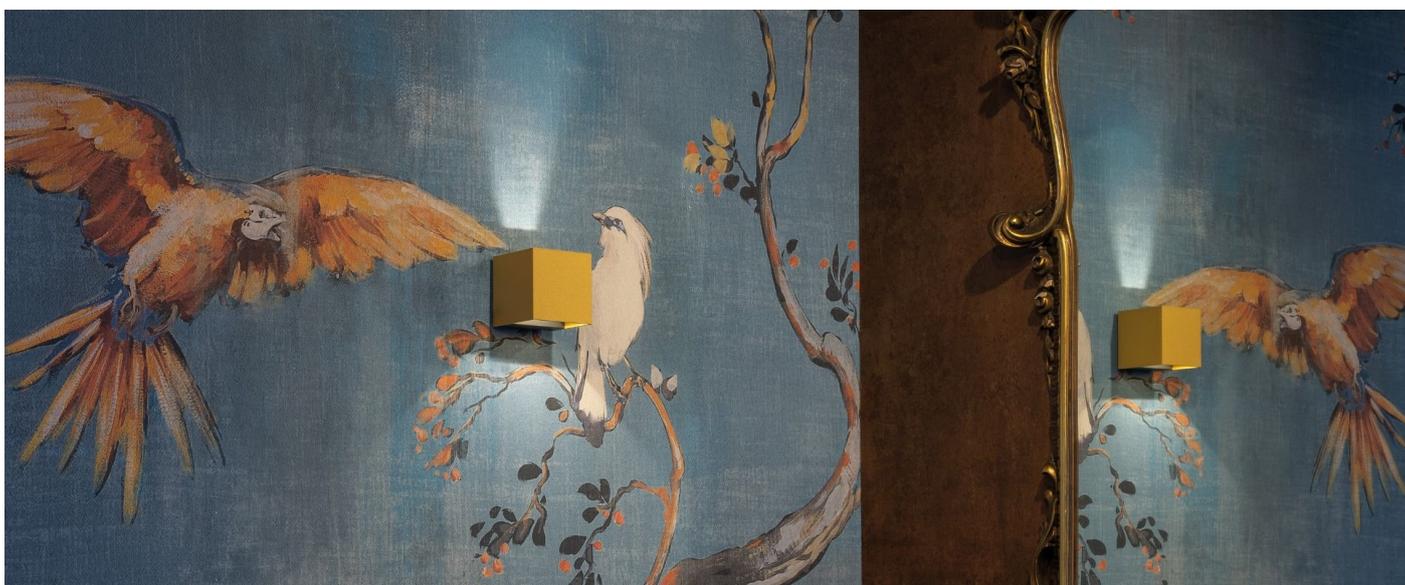


Installation images:




Lighting simulation:

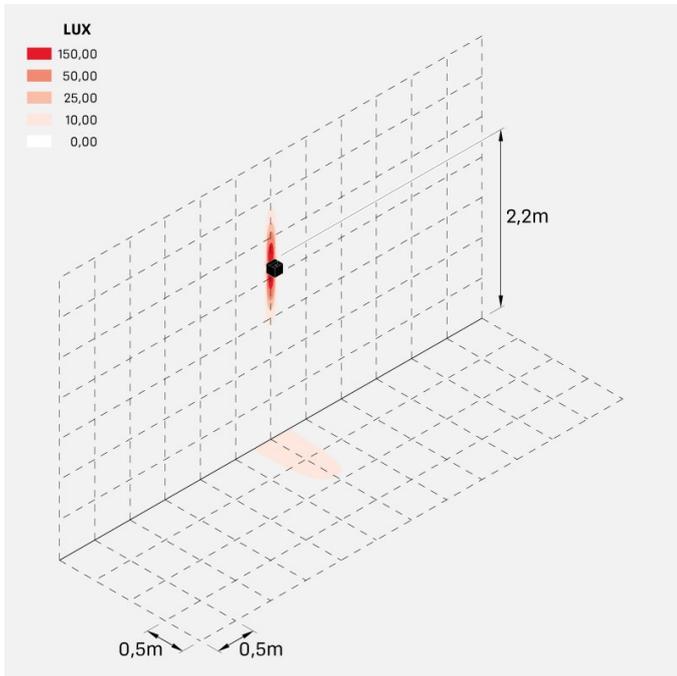


dodo_100_30

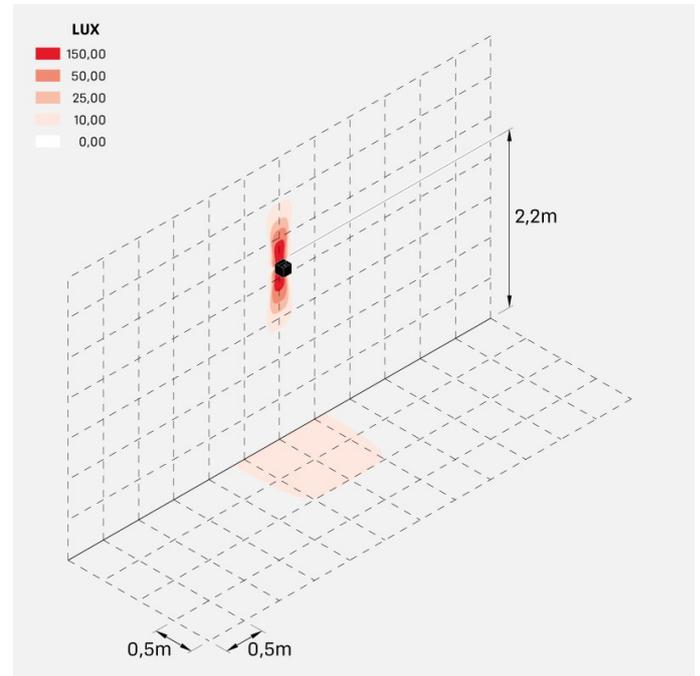

dodo_100_45

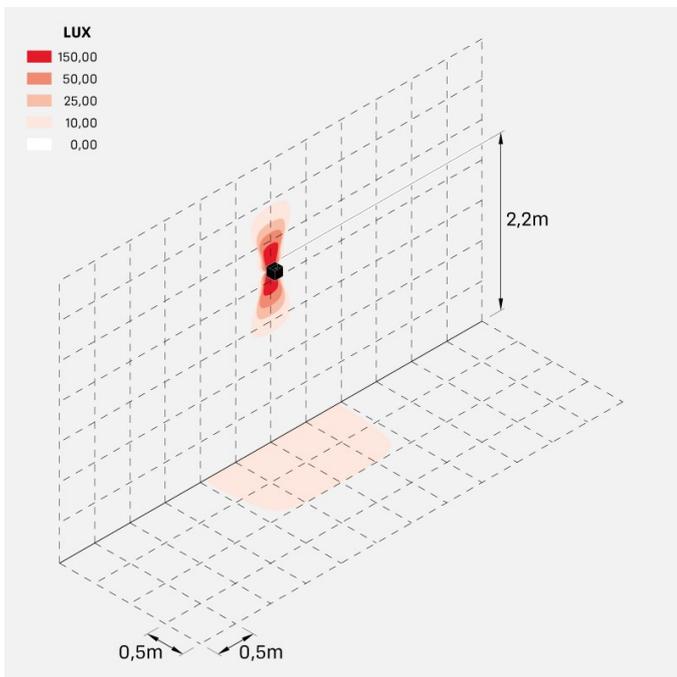


dodo_100_60

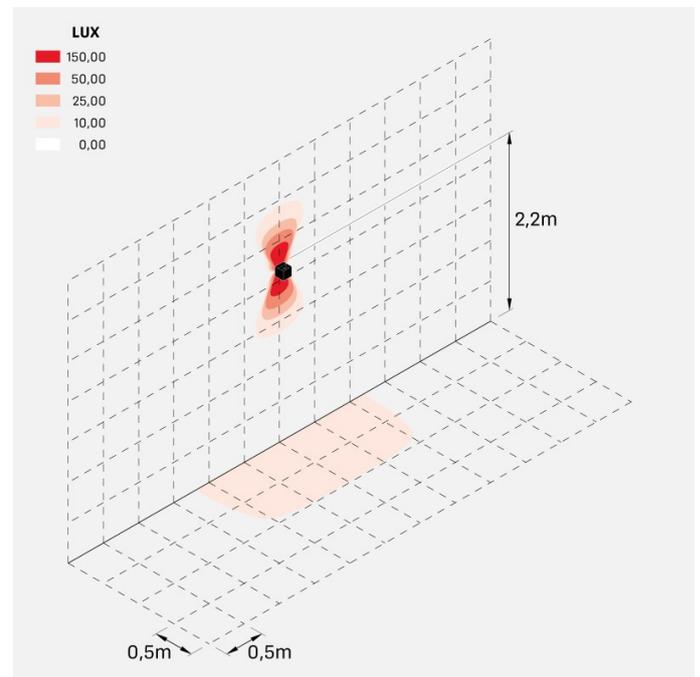




dodo_100_75

LL14303D2

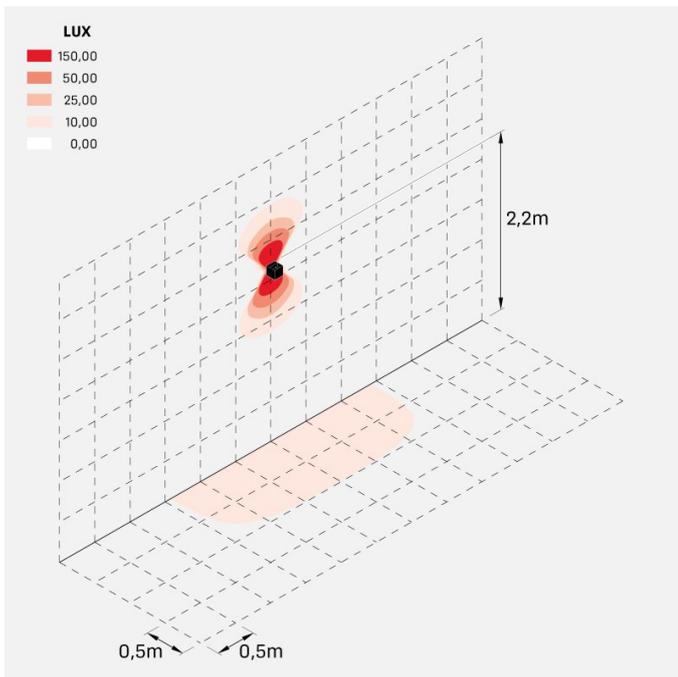

dodo_100_90

Photometric curves:

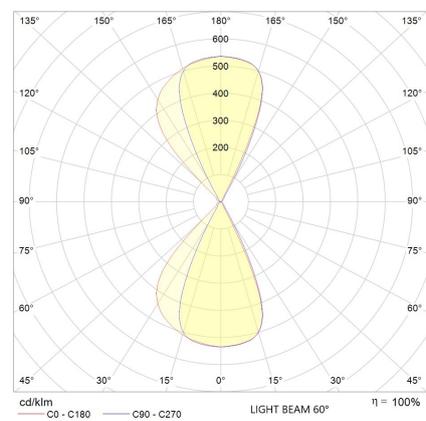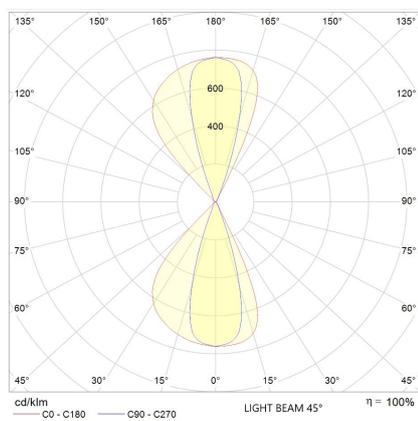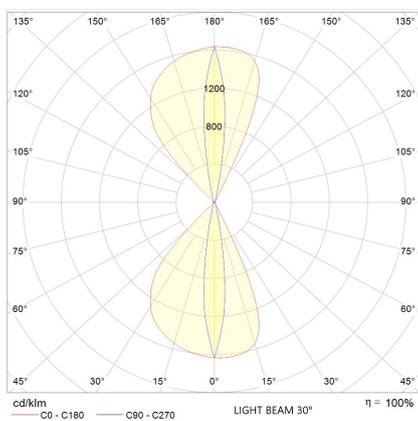

Dodo 100

LL14303D2

Lombardo.

