Dodo 60 Full

LL14302D2

Lombardo.





Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	G
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	3
Lumen:	360
Real Lumen:	83
Power supply:	integrated
LED:	AC DIRECT
Insulation class:	CL.I
Type of protection:	**IP 54**
Resistance to breakage:	**IK 10 20J xx9**
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut

Available light beams: 15°, 30°, 60°, adjustable with removable masks.



Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Dodo 60 Full

LL14302D2

Lombardo.

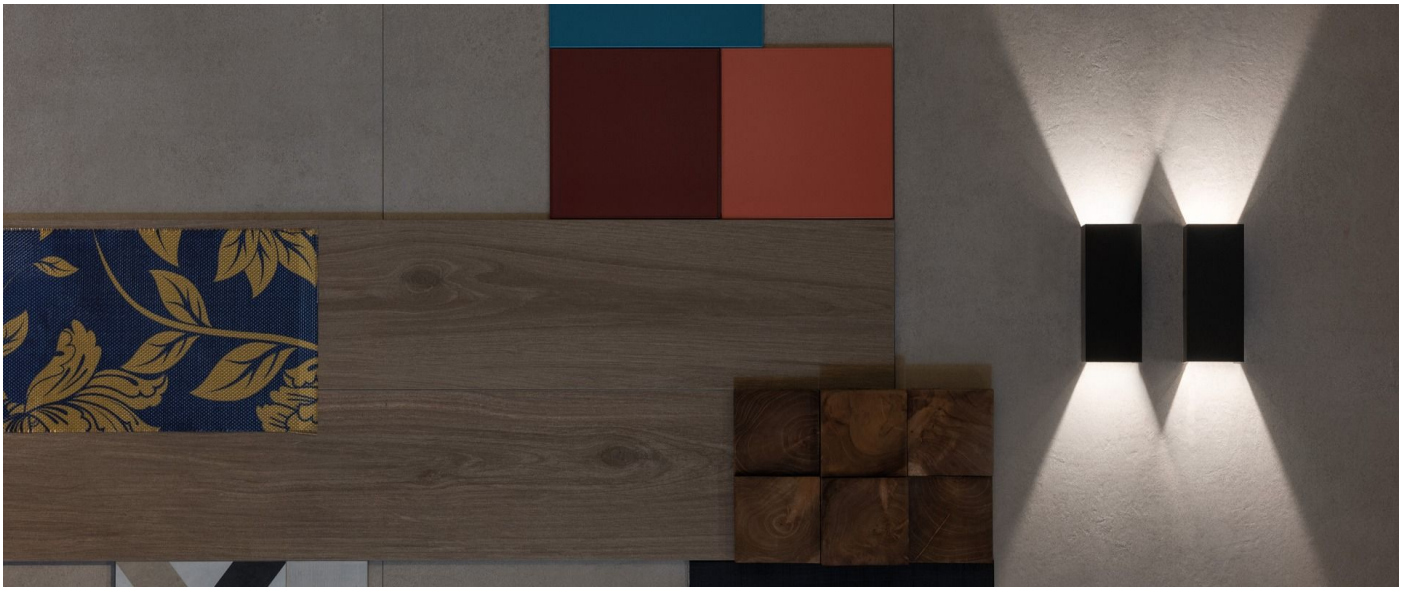



Installation images:



Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Dodo 60 Full

LL14302D2

Lombardo.

Lighting simulation:

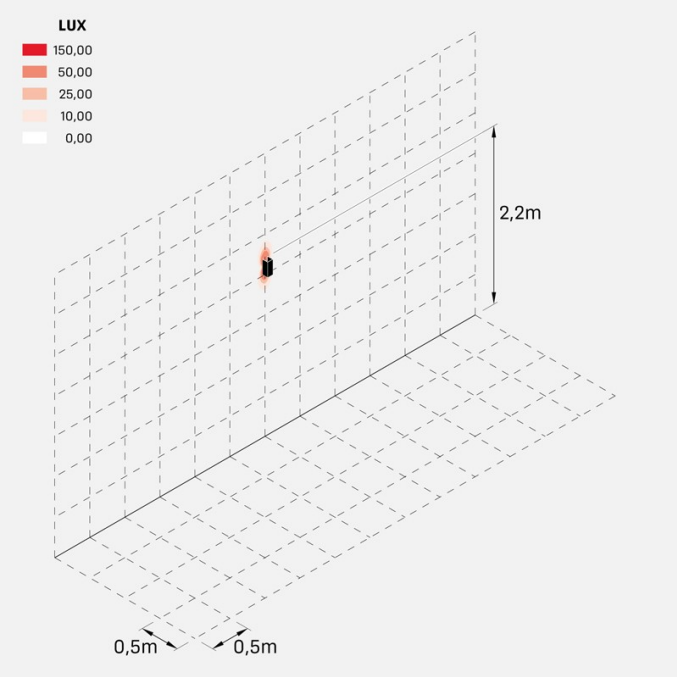

dodo_60_full_15

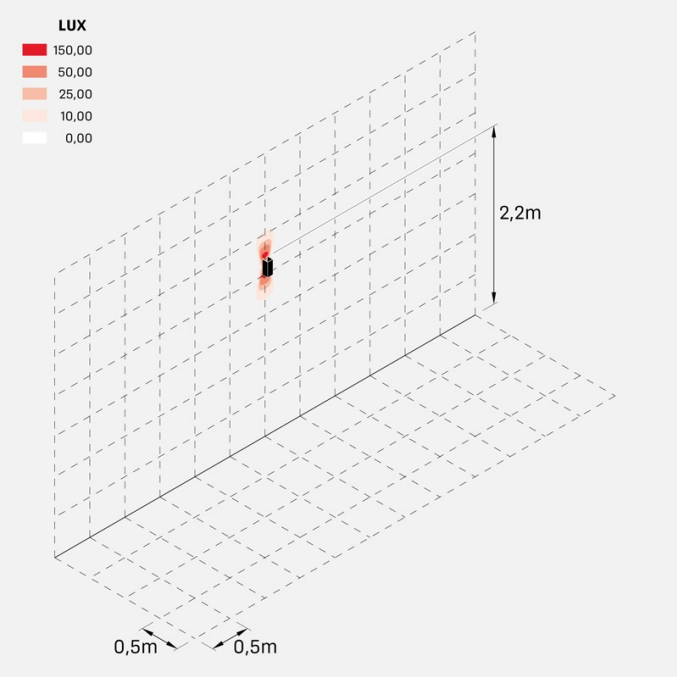

dodo_60_full_30

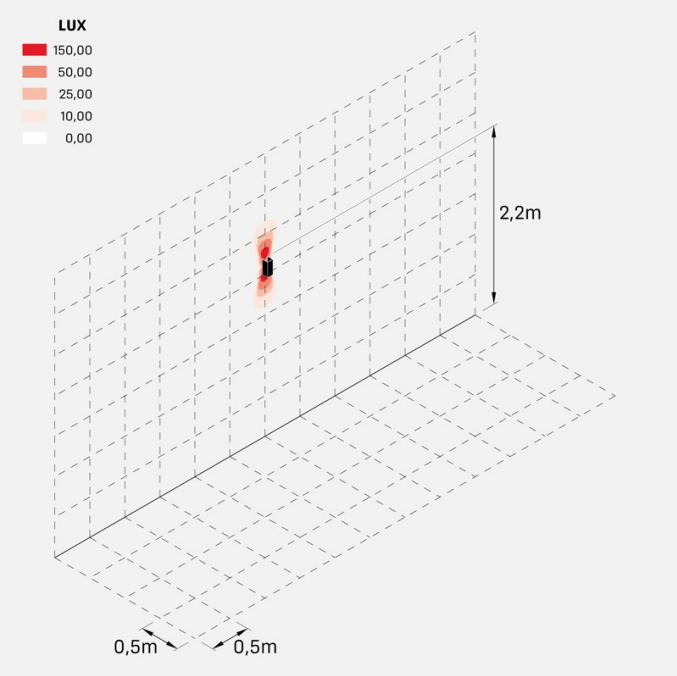

dodo_60_full_60

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Dodo 60 Full

LL14302D2

Lombardo.

Photometric curves:

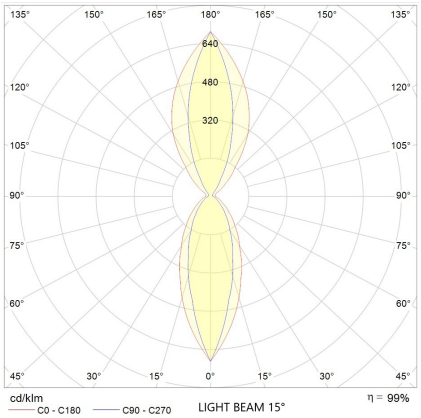

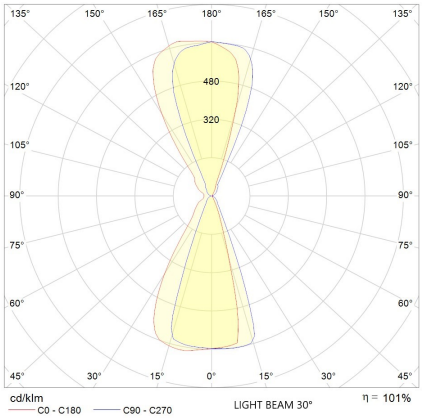

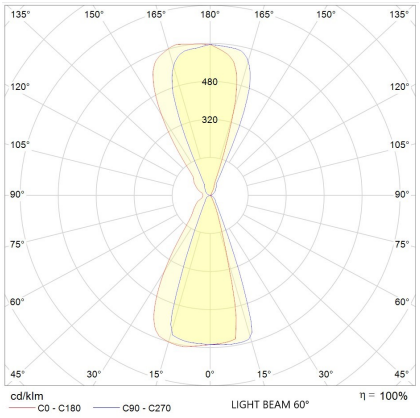

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it