

Technical information:

Installation:	Wall recess
Material:	Aluminium
Finish:	White RAL 9010
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B50 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	5,6
Lumen:	600
Real Lumen:	300
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	44-56-65-82
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA

Single cable entry at the back. **BORDO MARE**: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.



Fix 504

LL1200043

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Fix 504

LL1200043


Lombardo.

Lighting simulation:

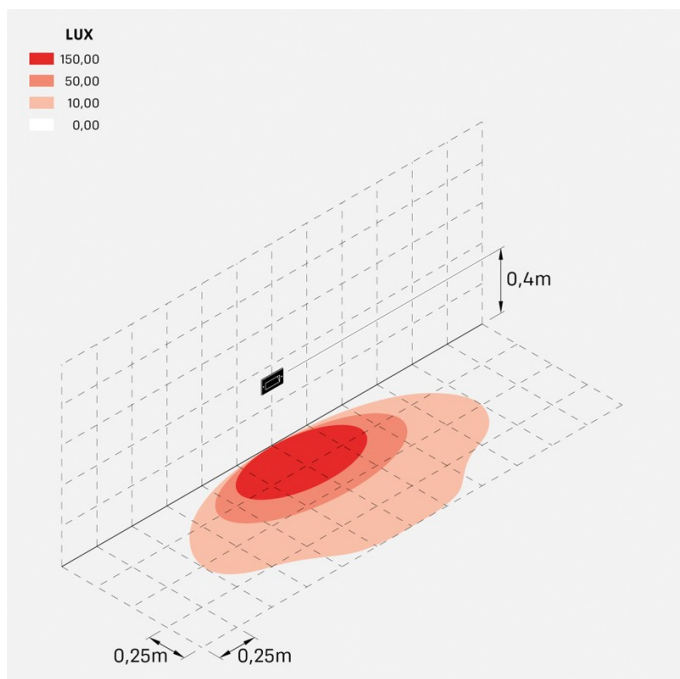

fix_504

Photometric curves:

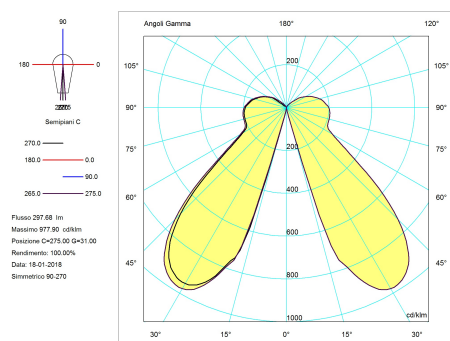

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it