
Fix 506

LL1200102

Lombardo.







Installation: Wall recess
Material: Aluminium

Finish: Grey anthracite RAL

7021

>80

Diffuser type: Frosted glass

Lamp type: LED

Energy performance class: E

Colour temperature: 2700K

LB Factor: L80B50 - 50.000h

Photobiological risk: RG0
Power consumption (Watt): 7,2
Lumen: 750
Real Lumen: 375

B10 - C10 - B16 - C16

Insulation class:

© CL.I

Type of protection: IP 66

Resistance to breakage: IK 10 20J xx9

Standards and Marks of

Conformity:

CRI:

C€ KK

Double cable entry at the back. **BORDO MARE**: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.





Lombardo.

Fix 506


LL1200102



Lombardo.

Fix 506 LL1200102

Lighting simulation:

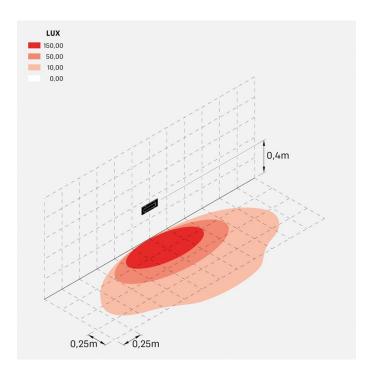

fix_506