


Flag 200 Reg

LL14011EA3

Lombardo.



Technical information:

Installation:	Ground, Wall
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Etched glass
Optics:	Asymm.
Lamp type:	LED
Energy performance class:	G
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	10
Lumen:	1350
Real Lumen:	Max 855
Power supply:	<input checked="" type="checkbox"/> integrated
LED:	220-240 V
Circuit breaker	45-56-66-82
B10 - C10 - B16 - C16	
Insulation class:	<input type="checkbox"/> CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE UK

Supplied with 5-step adjustment bracket in painted aluminium.

Flag 200 Reg


LL14011EA3

Lombardo.




LL14011EA3


Lighting simulation:

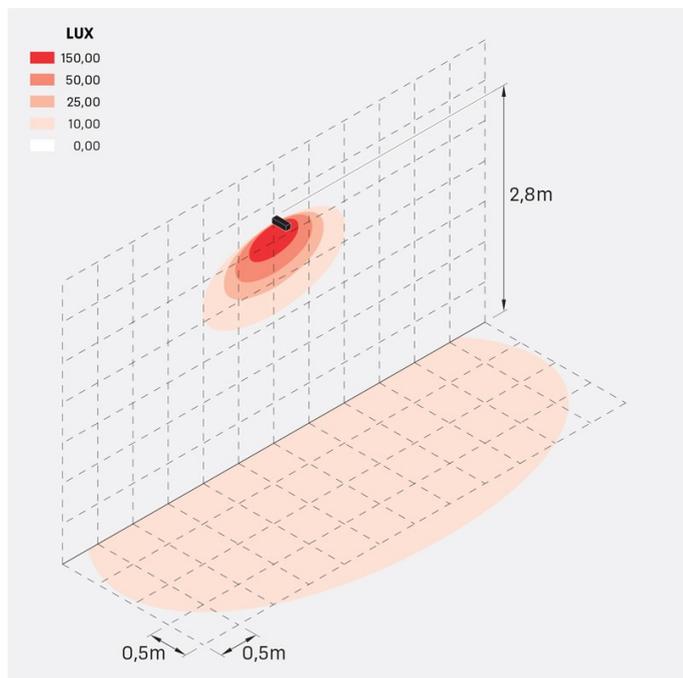


flag_200_reg_a

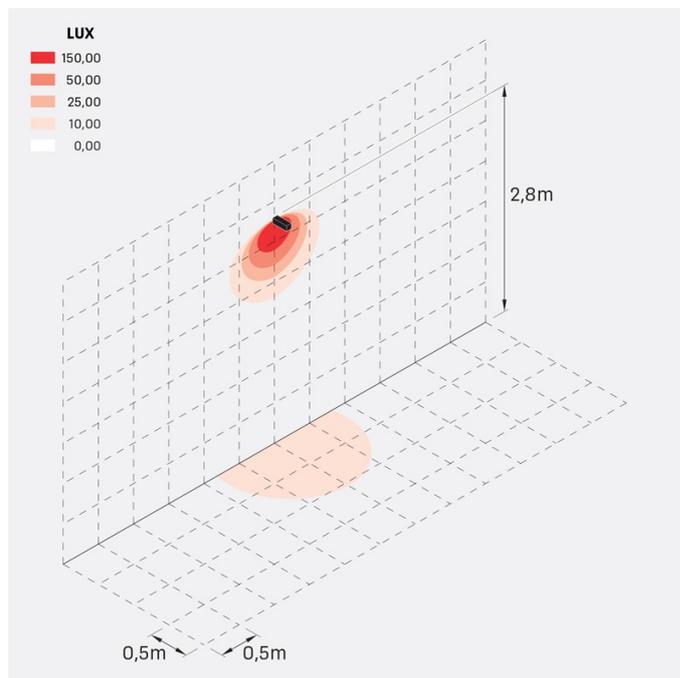

flag_200_reg_d

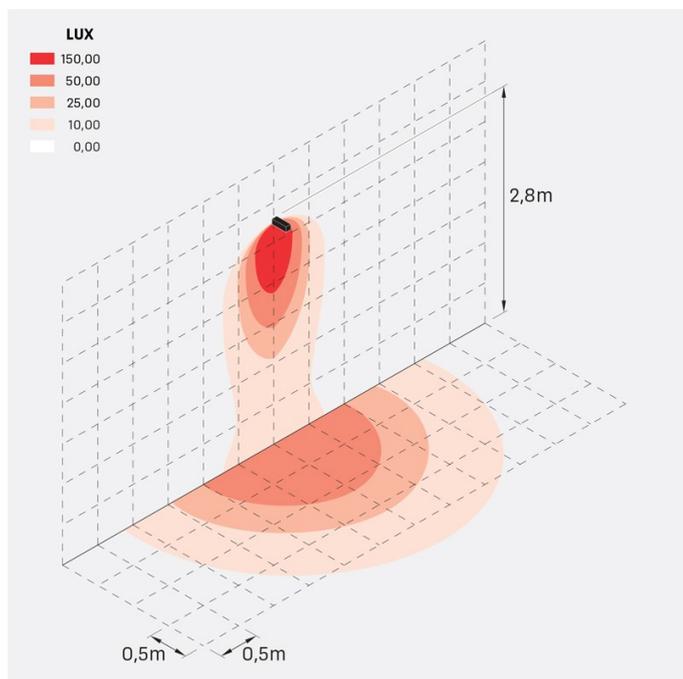

flag_200_reg_s

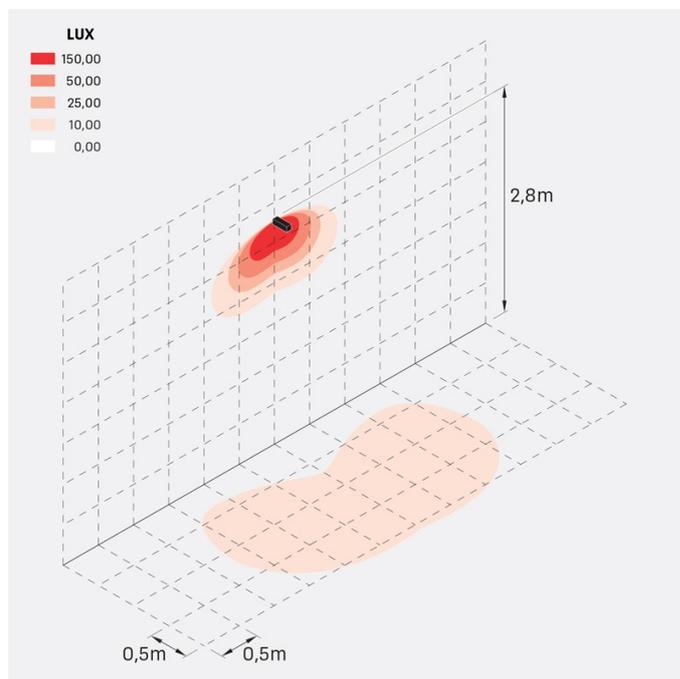

flag_200_reg_w

Flag 200 Reg

LL14011EA3

Lombardo.

Photometric curves:

