

# Flo Q 500


LL1340083

**Lombardo.**



## Technical information:

Installation:	Wall, Ceiling
Material:	Aluminium
Finish:	White RAL 9003
Diffuser type:	Polycarbonate
Lamp type:	LED
Colour temperature:	3000K, Im -5%
CRI:	>80
LB Factor 50.000 h:	L80B20
Photobiological risk:	RG0
Power consumption (Watt):	39
Lumen:	4200
Real Lumen:	3247
Power supply:	✔ integrated
LED:	220-240 V
Circuit breaker	13-16-19-24
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 20</b>
Resistance to breakage:	<b>IK 06 1J xx3</b>
Standards and Marks of Conformity:	CE UK EA

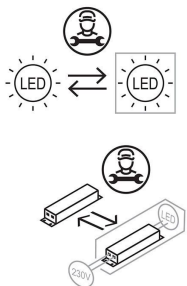

**Flo Q 500**

LL1340083

**Lombardo.**



**Installation images:**




**Lombardo S.r.l.**

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - F 0039 035 939 496 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**

LL1340083

## Lighting simulation:

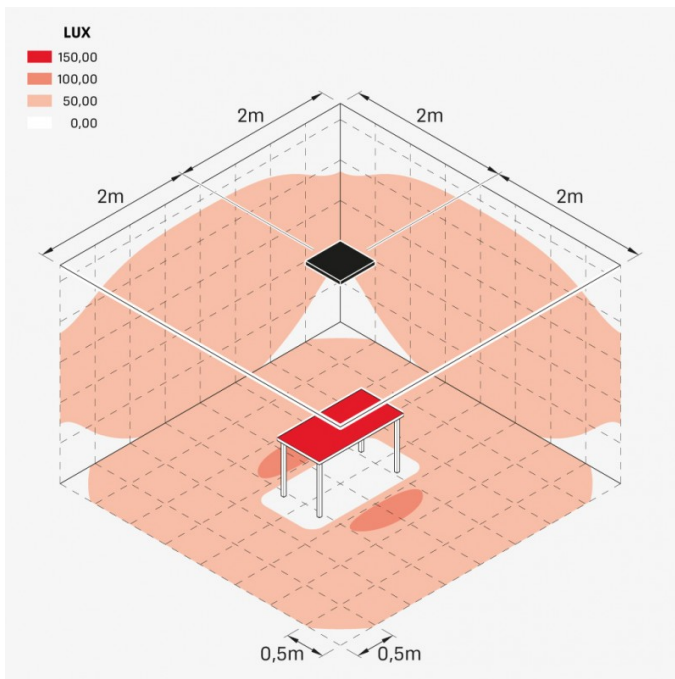

Flo\_Q\_500

## Photometric curves:

