


Flo Q 500


LL1340103

Lombardo.

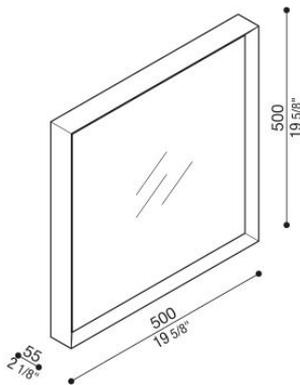

Technical information:


Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	39
Lumen:	4200
Real Lumen:	2825
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	13-16-19-24
B10 - C10 - B16 - C16	
Insulation class:	⊖ CL.I
Type of protection:	IP 20
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK ER




Flo Q 500

LL1340103

Lombardo.

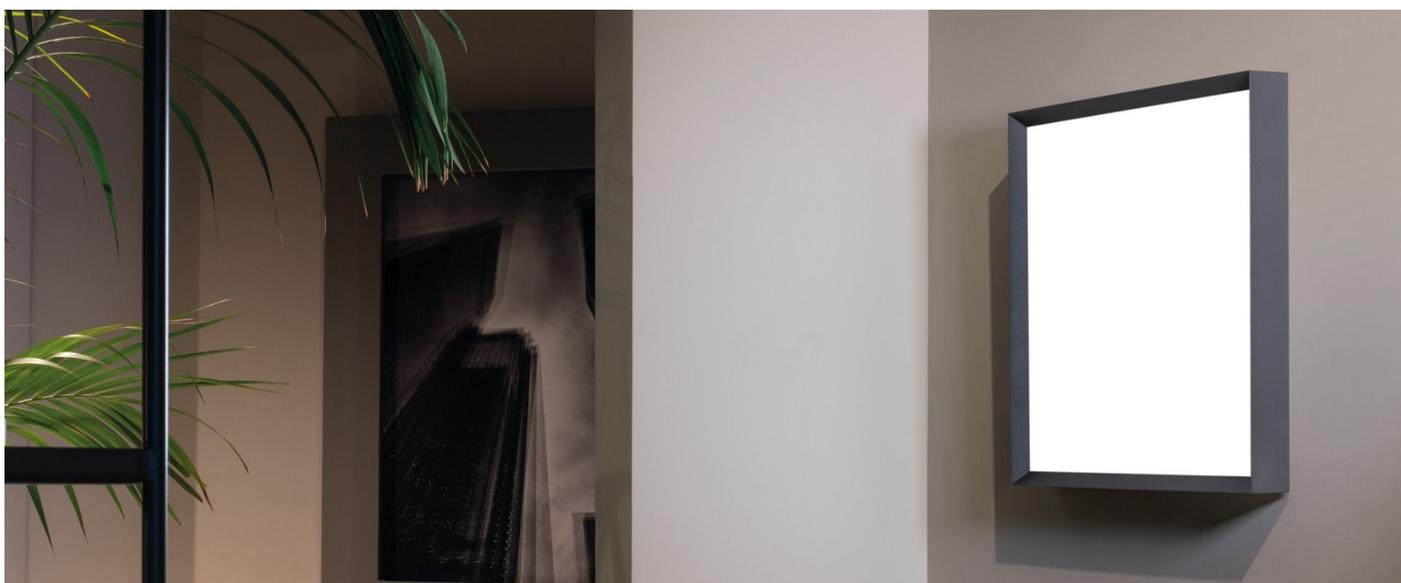

Installation images:

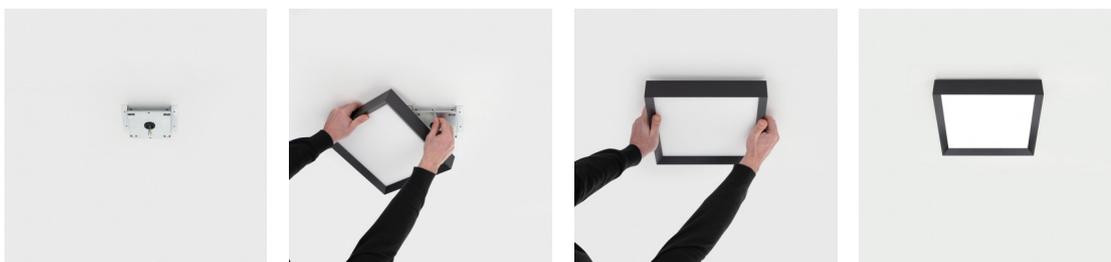


Flo Q 500

LL1340103

Lombardo.

Lighting simulation:

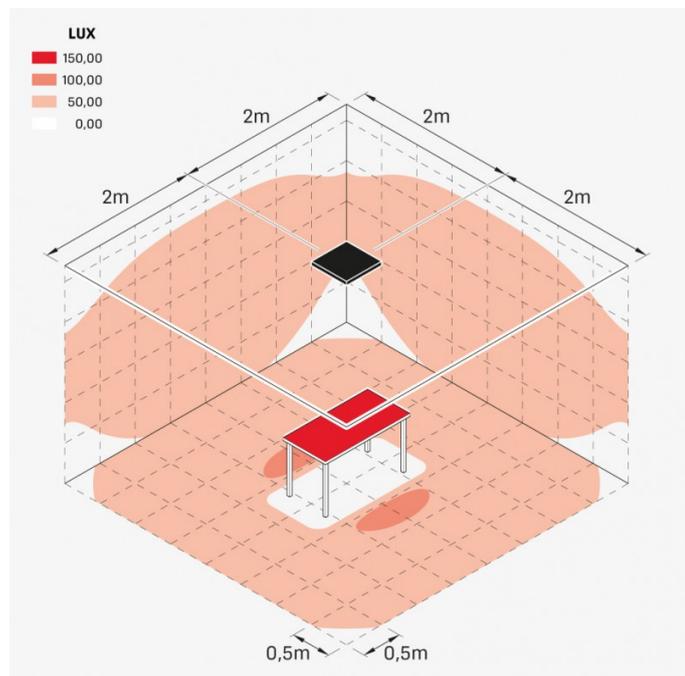

flo_q_500