


# Flo T 300

LL1340162

**Lombardo.**



## Technical information:

Installation:	Wall, Ceiling
Material:	Aluminium
Finish:	White RAL 9003
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	30
Lumen:	2800
Real Lumen:	2136
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	22-27-32-41
B10 - C10 - B16 - C16	
Insulation class:	⊖ CL.I
Type of protection:	<b>IP 20</b>
Resistance to breakage:	<b>IK 06 1J xx3</b>
Standards and Marks of Conformity:	CE UK CB



**Flo T 300**

LL1340162

**Lombardo.**



**Installation images:**




**Lombardo S.r.l.**

Via Pizzoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**

LL1340162

## Lighting simulation:

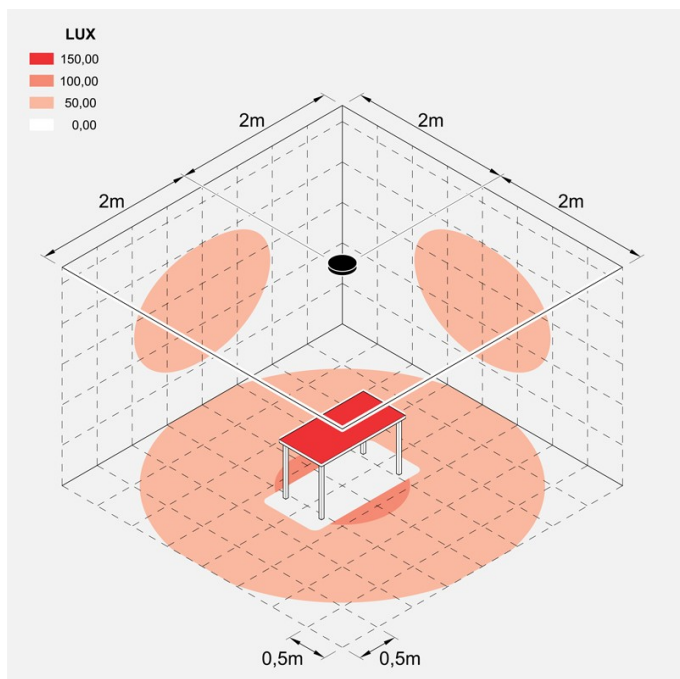

flo\_t300

## Photometric curves:

