
Flo T 300

LL1340163


Lombardo.






Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Material:	Aluminium
Finish:	White RAL 9003
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	30
Lumen:	2800
Real Lumen:	2136
Power supply:	integrated
LED:	220-240 V
Circuit breaker B10 - C10 - B16 - C16	22-27-32-41
Insulation class:	CL.I
Type of protection:	**IP 20**
Resistance to breakage:	**IK 06 1J xx3**
Standards and Marks of Conformity:	CE UK CA







Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Flo T 300

LL1340163

Lombardo.

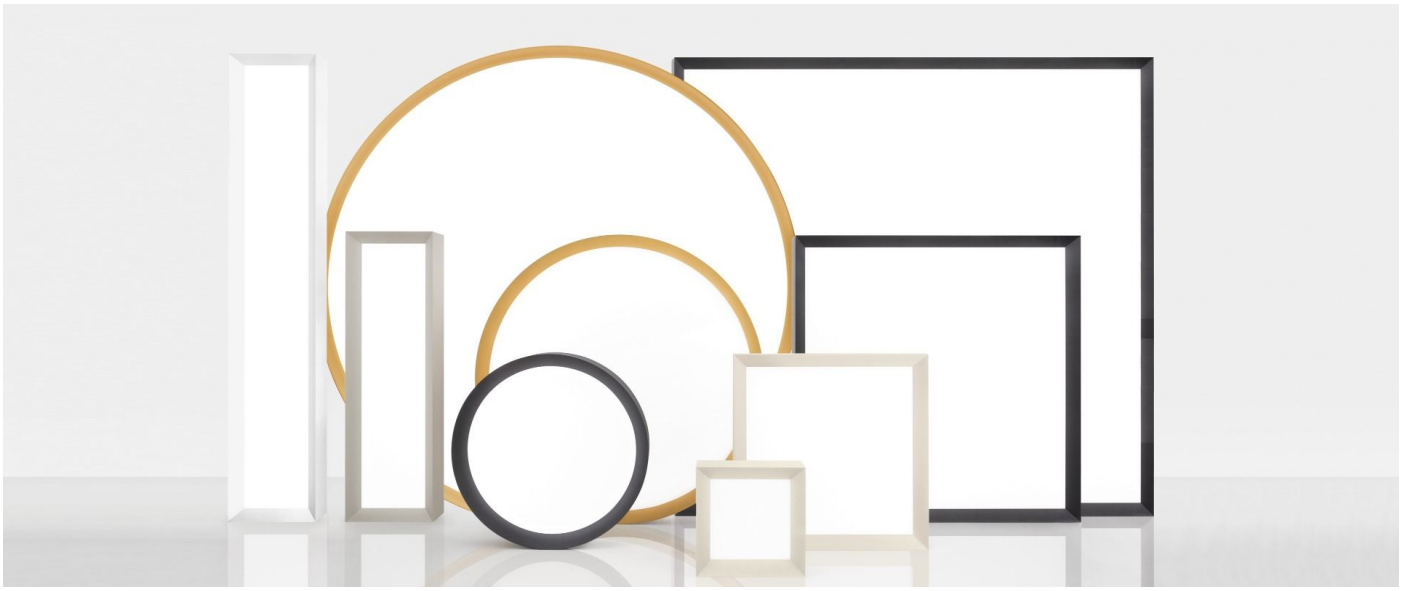

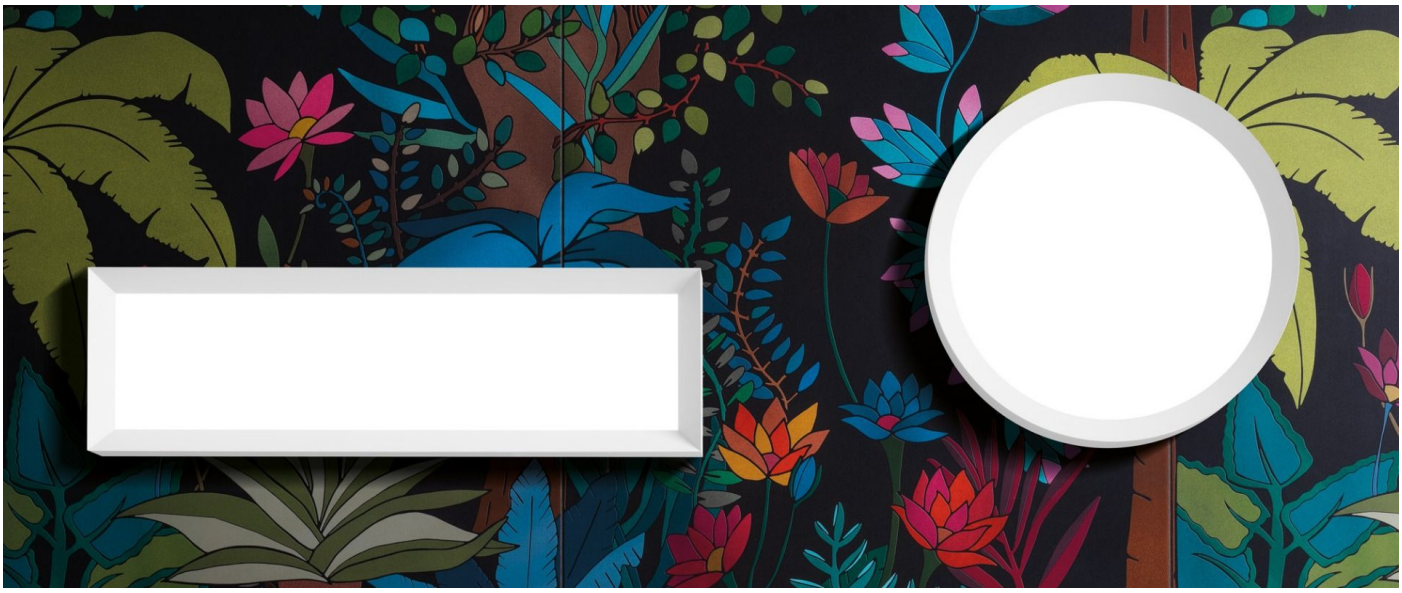

Installation images:










Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Flo T 300


LL1340163

Lombardo.

Lighting simulation:

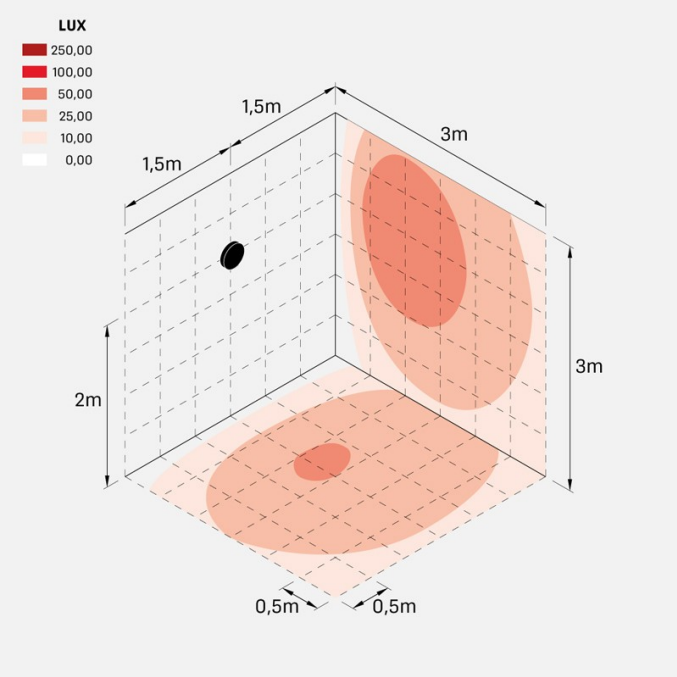


flo_t_300_parete.jpg

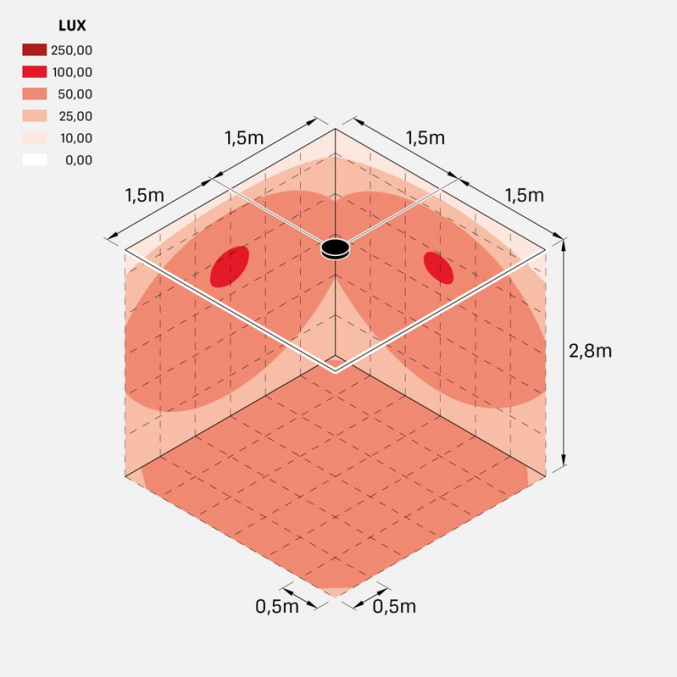

flo_t_300_soffitto.jpg

Photometric curves:

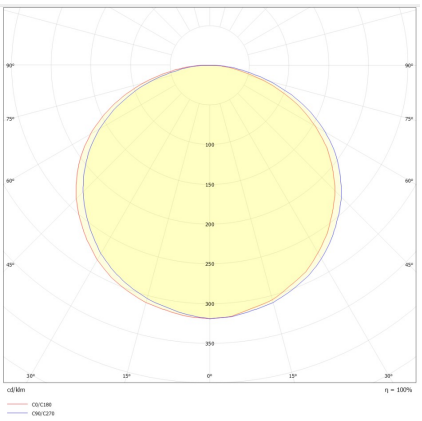

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it