


Technical information:

Installation:	Wall recess, Ceiling recess, Ground recess
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Diffuser type:	Transparent glass
Optics:	29°
Lamp type:	LED
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	180
Real Lumen:	120
Power supply:	⊗ not included
LED:	500mA - 4.8V
Insulation class:	⬢ CL.III
Power cable:	1.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	500 KG MAX 65°C MAX




INC 35

LL132002MN


Lombardo.




Lighting simulation:

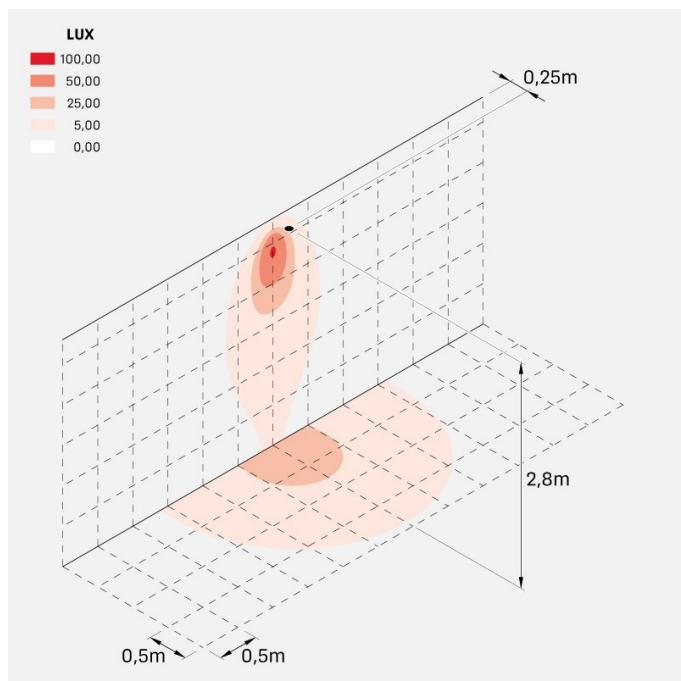

inc_35_l

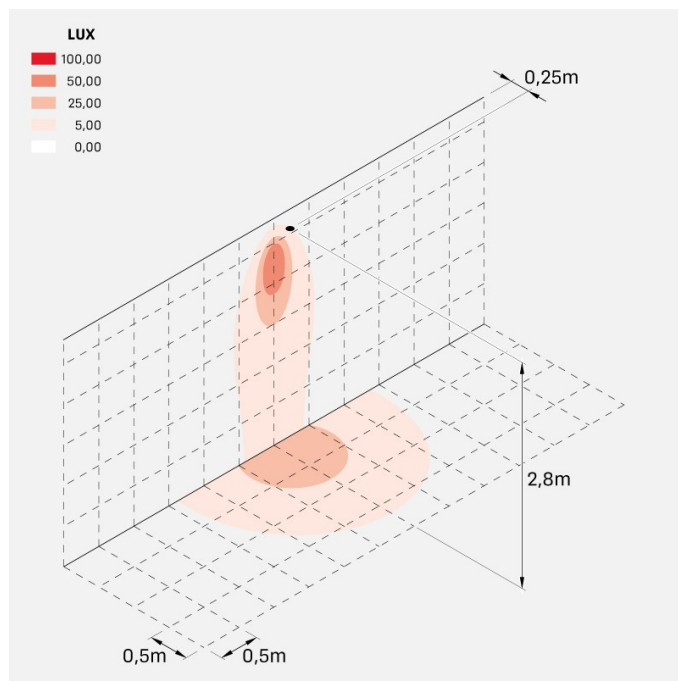

inc_35_m

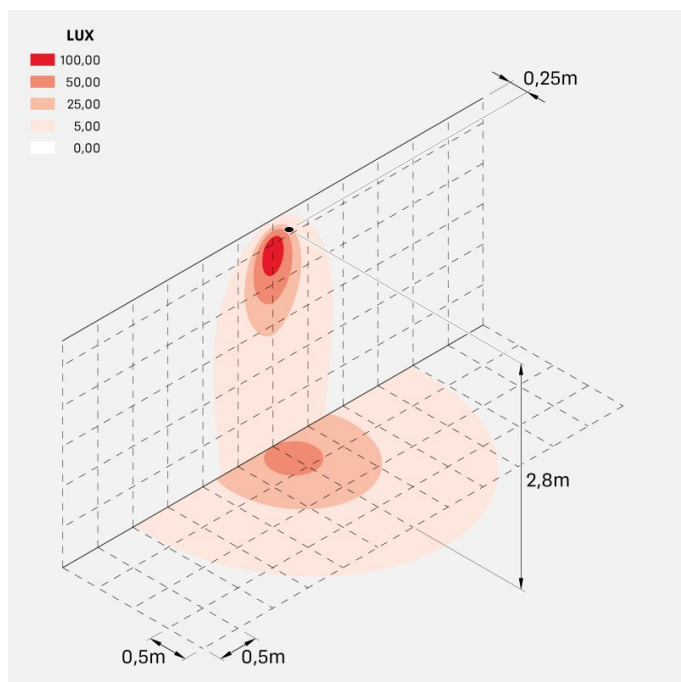

inc_35_s