

.....

INC

.....

↘ INC 35

↘ INC 50

INC

Installazione Installation Installation Instalación	Incasso parete - Incasso soffitto - Incasso terra Wall recess - Ceiling recess - Ground recess Encastrément au mur - Encastrément au plafond - Encastrément au sol Empotrar pared - Empotrar techo - Empotrar suelo
Materiali Materials Materiali Materiales	Materiale Corpo: Alluminio Tipo di diffusore: Vetro Material: Aluminium Diffuser type: Glass Matériel du corps: Aluminium Type de diffuseur: Verre Material del cuerpo: Aluminio Tipo de difusor: Cristal
Alimentazione Power supply Alimentation Alimentación	500mA - 4,8V - 12/24V - 500mA - 14V - 24V
Versioni Versions Versions Versiones	Cavo Alimentazione: 1,50 metri H05RN-F 2×0,75 Power cable: 1.50 m H05RN-F 2×0.75 Câble d'alimentation: 1,50 m H05RN-F 2×0,75 Cable de alimentación: 1,50 m H05RN-F 2×0,75



INC
35



INC
50



IP
67



24V



AQUASTOP




PREWIRED



5
YEARS WARRANTY

COLOURS



Satin grey



Grey anthracite RAL 7021




White RAL 9010

INC 35

IP 67
IK 10 20J xx9
CE UK 500 KG MAX
65°C MAX



LED				COL.	CODE *
W	LM	REAL LM			
2	180	120		 	LL132000□□ LL132002□□ LL132001□□
2	180	120		 	LL132003□□ LL132005□□ LL132004□□



Technical drawing of the INC 35 LED light fixture. Dimensions include: 49 mm (1 7/8") for the main body diameter, 26 mm (1") for the mounting hole diameter, 35 mm (1 3/8") for the mounting hole diameter, and 30 mm (1 1/8") for the mounting hole diameter.


★ Complete the CODE ○ OPTIC S | 14° M | 29° L | 46° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K

INC 50

IP 67
IK 10 20J xx9
CE UK 500 KG MAX
65°C MAX



LED				COL.	CODE *
W	LM	REAL LM			
6,5	650	418		 	LL132006□□ LL132008□□ LL132007□□
6,5	650	418		 	LL132009□□ LL132011□□ LL132010□□



Technical drawing of the INC 50 LED light fixture. Dimensions include: 79 mm (3 1/8") for the main body diameter, 42 mm (1 5/8") for the mounting hole diameter, 65 mm (2 1/2") for the mounting hole diameter, and 45 mm (1 3/4") for the mounting hole diameter.

★ Complete the CODE ○ OPTIC S | 13° M | 24° L | 53° □ LED COLOUR N | 4000K 3 | 3000K 2 | 2700K



Accessori | Accessories | Accessoires | Accesorios

Cavo H05RN-F 2x0,75

Cavo H05RN-F in Neoprene, sezione 2x0,75.
Adatto ad uso esterno.

Cable type H05RN-F 2x0,75
Cable type H05RN-F in Neoprene, section 2x0.75.
Suitable for outdoor use.

Câble H05RN-F 2x0,75
Câble H05RN-F en Néoprène, section 2x0.75.
Également adapté à l'usage à l'extérieur.


Cable H05RN-F 2x0,75
Cable H05RN-F de Neopreno, sección 2x0,75.
Adecuado para el uso al exteriores.

Cavo H05RN-F 5m	
Col.	Code
	LB1070004

Cavo H05RN-F 10m	
Col.	Code
	LB1070005

Cavo H05RN-F 15m	
Col.	Code
	LB1070006

Cavo H05RN-F 20m	
Col.	Code
	LB1070007



Armatura da incasso INC 35


Armatura da incasso in termoplastico.

Thermoplastic recess box INC 35
Thermoplastic recess box.

Armature à encastrer INC 35
Armature à encastrer en matériau thermoplastique.

Caja de empotrar INC 35
Caja de empotrar de material termoplástico.

Col.	Code
	LB1070001



Armatura da incasso INC 50


Armatura da incasso in termoplastico.

Recess box INC 50
Thermoplastic recess box.

Boîte d'encastrement INC 50
Armature à encastrer en matériau thermoplastique.


Caja de empotrar INC 50
Caja de empotrar de material termoplástico.

Col.	Code
	LB1070039




Alimentatori INC 35 in corrente costante

INC 35 ballasts in constant current	350mA			500mA		
	N° max	IP	Code	N° max	IP	Code
Alimentations INC 35 en courant constant	1/2	20	LB1070008	1/2	20	LB1070015
	1/4	20	LB1070009	1/4	20	LB1070016
Alimentadores INC 35	5/10	20	LB1070011	5/10	20	LB1070018
	1/2 1-10V PUSH	20	LB1070012	1/12 1-10V PUSH	20	LB1070019
	2/4	67	LB1070013	1/4	67	LB1070020
	5/10	67	LB1070014	5/10	67	LB1070021
	2/9 DALI	20	LB1070064	2/9 DALI	20	LB1070064
				1/7 1-10V PUSH	20	LB1070043




Alimentatori INC 35 in tensione costante 12/24V

INC 35 ballasts in constant tension 12/24V	12V			24V		
	N° max	IP	Code	N° max	IP	Code
Alimentations INC 35 en tension 12/24V	1/6	20	LB1070025	1/6	20	LB1070029
	1/12	20	LB1070026	1/12	20	LB1070030
Alimentadores INC 35 de tensión constante 12/24V	1/8	67	LB1070027	1/8	67	LB1070031
	1/15	67	LB1070028	1/15	67	LB1070032





Alimentatori INC 50 in corrente costante

INC 50 ballasts in constant current	350mA			500mA		
	N° max	IP	Code	N° max	IP	Code
Alimentations INC 50 en courant constant	1	20	LB1070009	1	20	LB1070016
	1/3	20	LB1070011	1/3	20	LB1070018
Alimentadores INC 50	1/3 1-10V PUSH	20	LB1070012	1/3 1-10V PUSH	20	LB1070019
	1/2	67	LB1070013	1/2	67	LB1070020
	1/3	67	LB1070014	2/4	67	LB1070021
	1/3 DALI	20	LB1070064	1/3 DALI	20	LB1070064



Alimentatori INC 50 in tensione costante 24V

INC 50 ballasts in constant tension 24V available	N° max	IP	Code
Alimentations INC 50 en tension 24V	1/2	20	LB1070029
	1/4	20	LB1070031
	1/5	67	LB1070030
Alimentadores INC 50 de tensión constante 24V	1/7	67	LB1070032

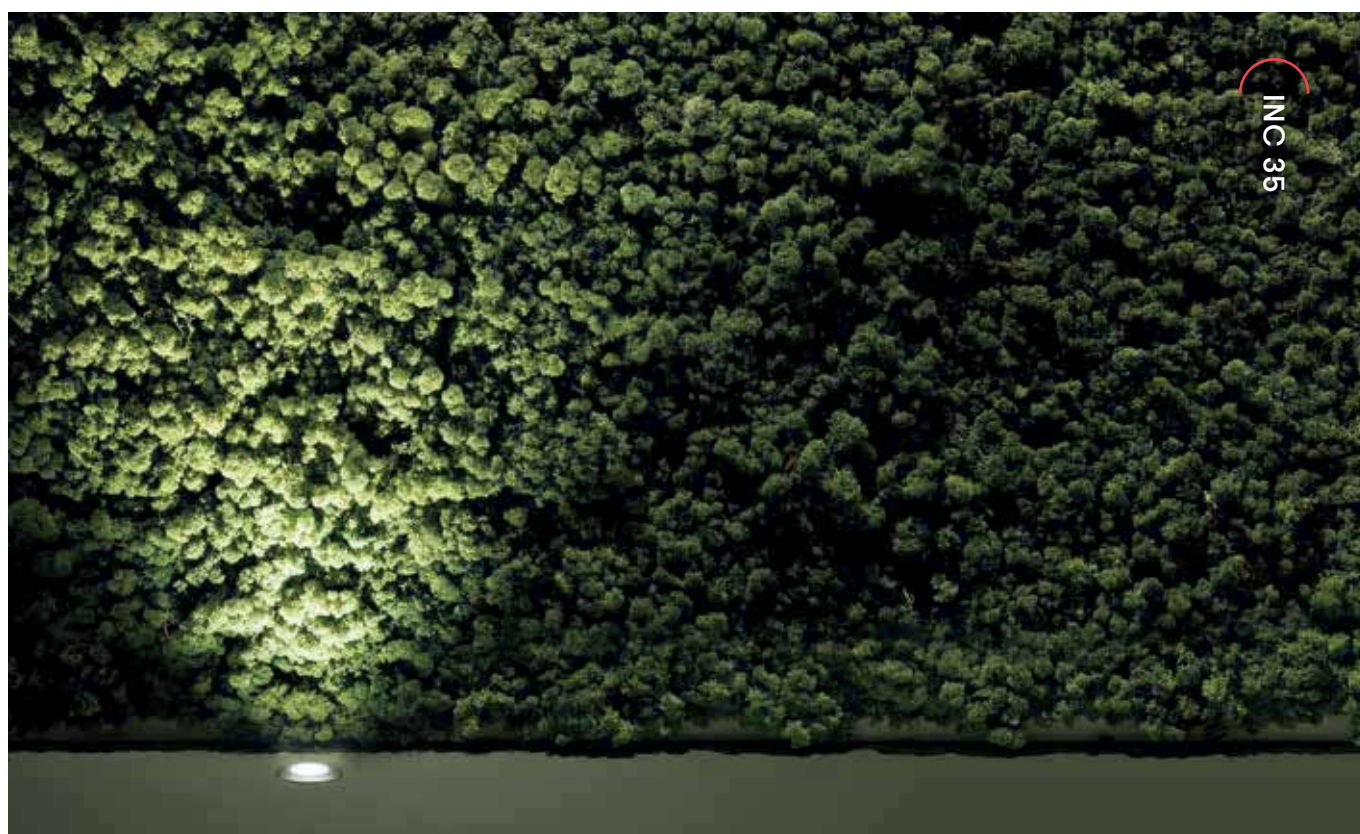



INC 50

