


INC 50


LL132011M3

Lombardo.

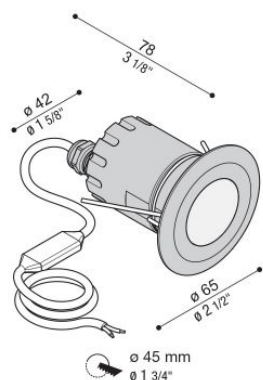

Technical information:

Installation:	Wall recess, Ceiling recess, Ground recess
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Diffuser type:	Transparent glass
Optics:	24°
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	6,5
Lumen:	650
Real Lumen:	418
Power supply:	⊗ not included
LED:	24V
Insulation class:	⬢ CL.III
Power cable:	1.50 m H05RN-F 2x0.75
Type of protection:	IP 67
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK CA
Additional features:	500 KG MAX 65°C MAX



Lombardo S.r.l.


Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

INC 50

LL132011M3

Lombardo.

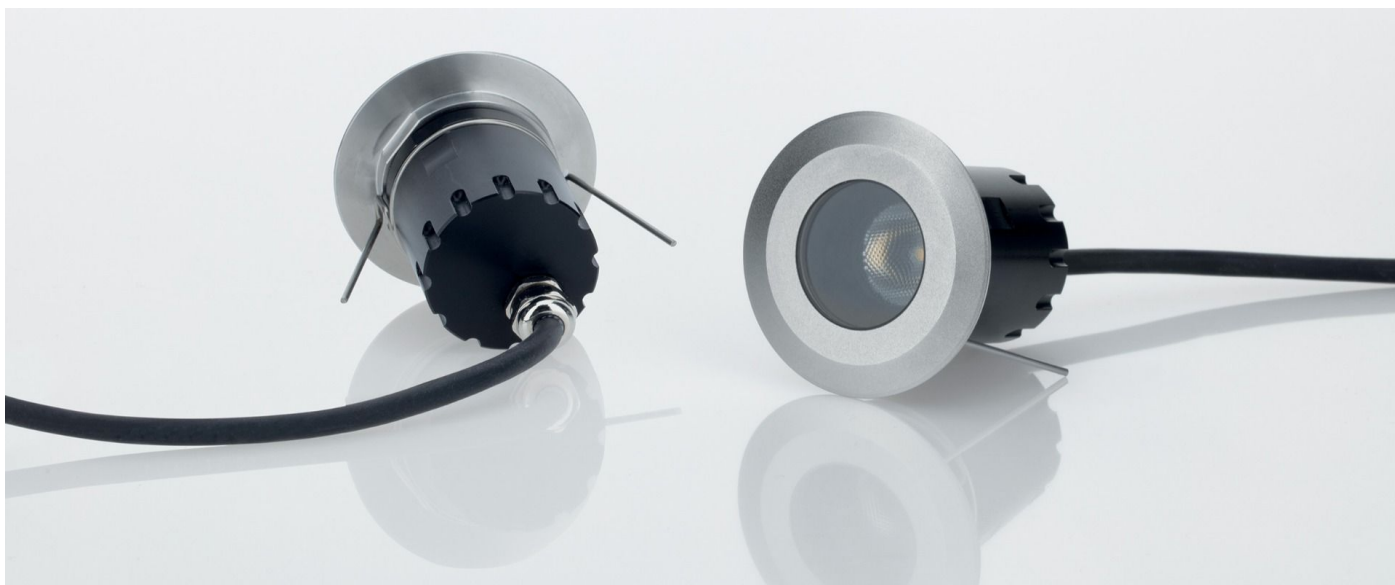


Lombardo S.r.l.


Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it


Lighting simulation:

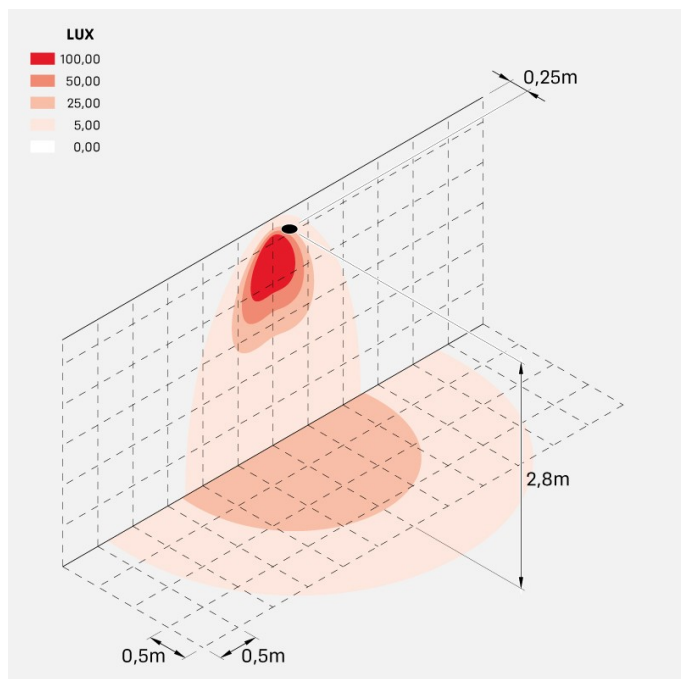

inc_50_l

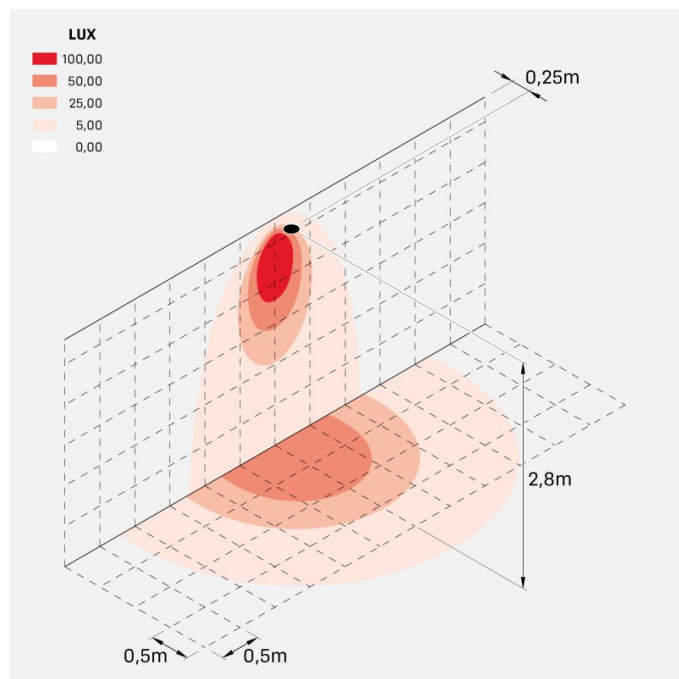

inc_50_m

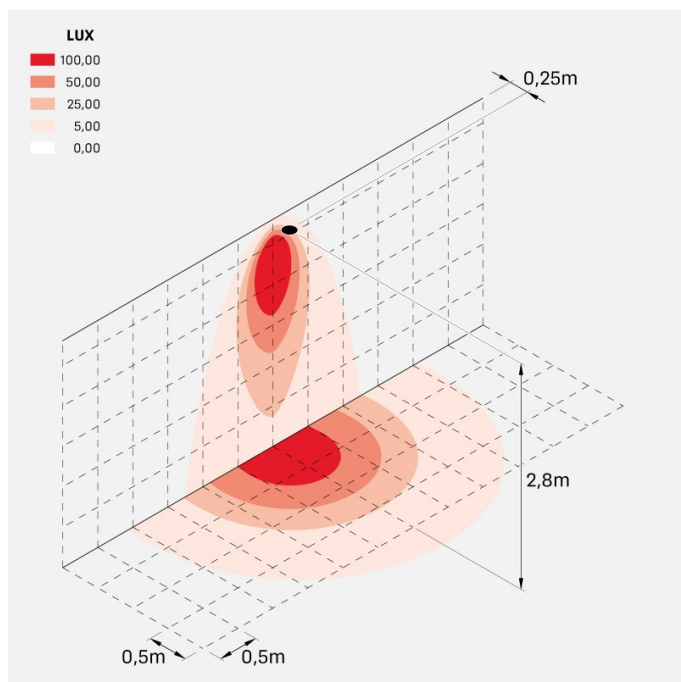

inc_50_s