


Kit 07 - Line 220 Post H500

Lombardo.


LL113104N

Technical information:

Installation:	Ground
Finish:	Black from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	11
Lumen:	1200
Real Lumen:	730
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	36-44-52-65
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK CA

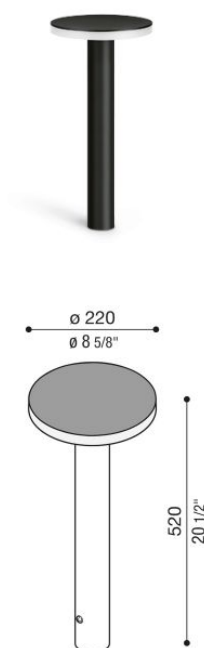

Kit consisting of the current codes LL113100N/3/2 + LB11112/G/E/K + LB1130006



Kit 07 - Line 220 Post H500

Lombardo.

LL113104N




Kit 07 - Line 220 Post H500

Lombardo.


LL113104N

Lighting simulation:

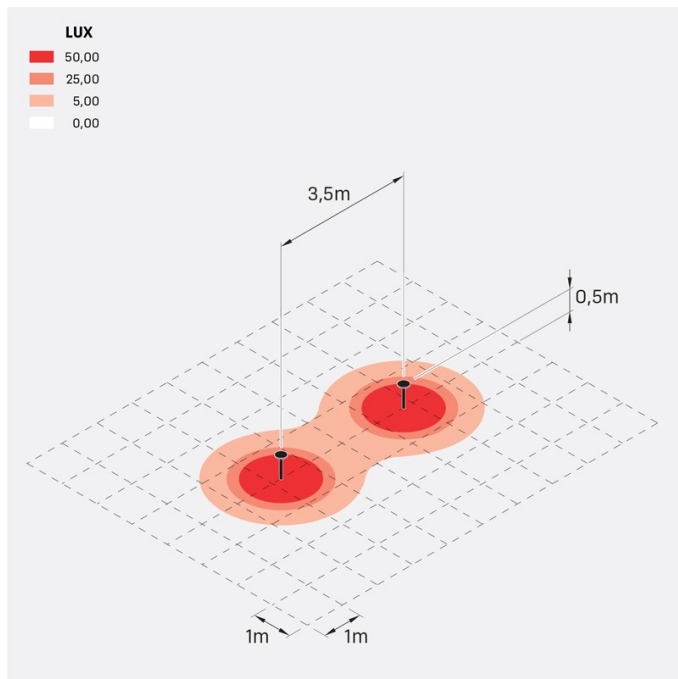

line220_post_H500_kit_07

Photometric curves:

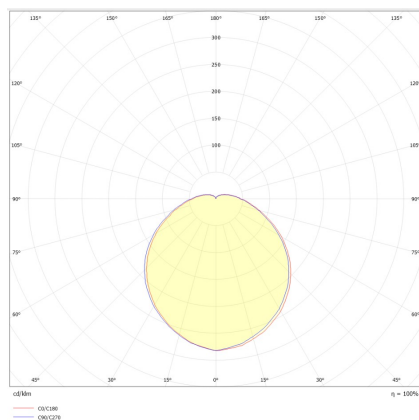

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it