


Kobo 110 BK

LL130002 □

LOMBARDO



Technical information:

Type of product:	Wall, Ceiling
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	A++
Colour temperature:	<input type="checkbox"/> 4000K <input checked="" type="checkbox"/> 3000K, lm -5% <input type="checkbox"/> 2700K, lm -5%
CRI:	>80
Photobiological risk:	RG0
Watt:	8
Lumen:	1000
Real Lumen:	130
Power supply:	<input checked="" type="checkbox"/> 220-240 V
Insulation class:	<input type="checkbox"/> CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE
Pieces per package:	18

Diffuser Fumè.


Product description:

Suitable for indoor and outdoor use. Polycarbonate base, injection moulded in-house. Very thick polycarbonate diffuser with triple UV stabilisation, injection moulded in-house. Silicone gaskets to maintain IP66 rating. Inaccessible device, provided with 0.15 m of prewired power cable H05RN-F. A4 stainless steel screws. LED 4000K (N), 3000K (3) or 2700K (2). LED AC direct. No risk of photobiological damage, RG0 group (EN62471).

Kobo 110 BK

LL130002 □

LOMBARDO

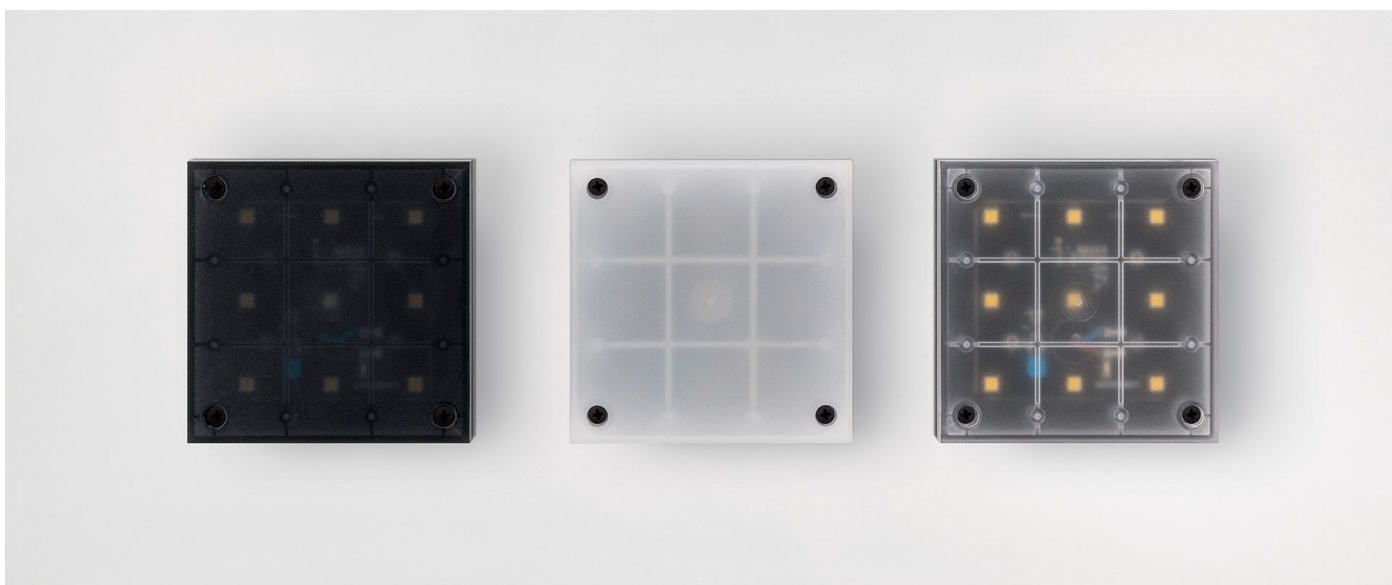

Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - F 0039 035 939 496 - E info@lombardo.it

lombardo.it