








# Kobo 110

LL130001 

LOMBARDO



## Technical information:

Type of product:	Wall, Ceiling
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	A++
Colour temperature:	<b>N</b> 4000K <b>3</b> 3000K, lm -5% <b>2</b> 2700K, lm -5%
CRI:	>80
Photobiological risk:	RG0
Watt:	8
Lumen:	1000
Real Lumen:	570 - 700
Power supply:	 220-240 V
Insulation class:	 CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	  
Pieces per package:	18



## Product description:

Suitable for indoor and outdoor use. Polycarbonate base, injection moulded in-house. Very thick polycarbonate diffuser with triple UV stabilisation, injection moulded in-house. Silicone gaskets to maintain IP66 rating. Inaccessible device, provided with 0.15 m of prewired power cable H05RN-F. A4 stainless steel screws. LED 4000K (N), 3000K (3) or 2700K (2). LED AC direct. No risk of photobiological damage, RG0 group (EN62471).

# Kobo 110

LL130001 □

LOMBARDO

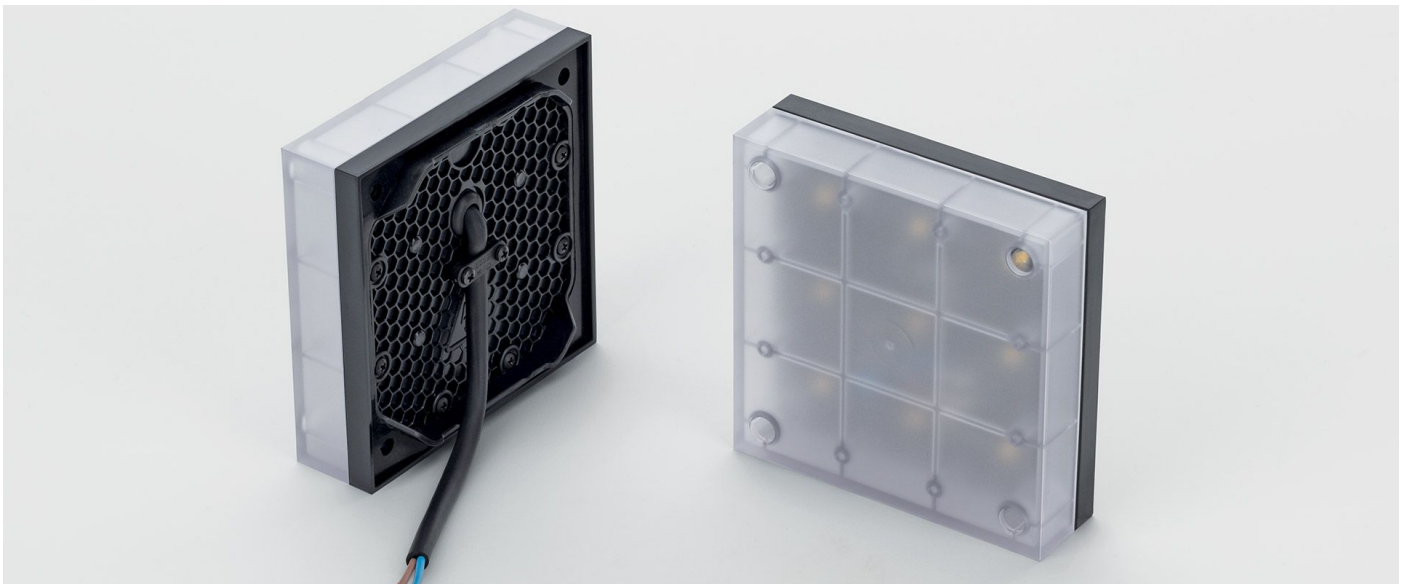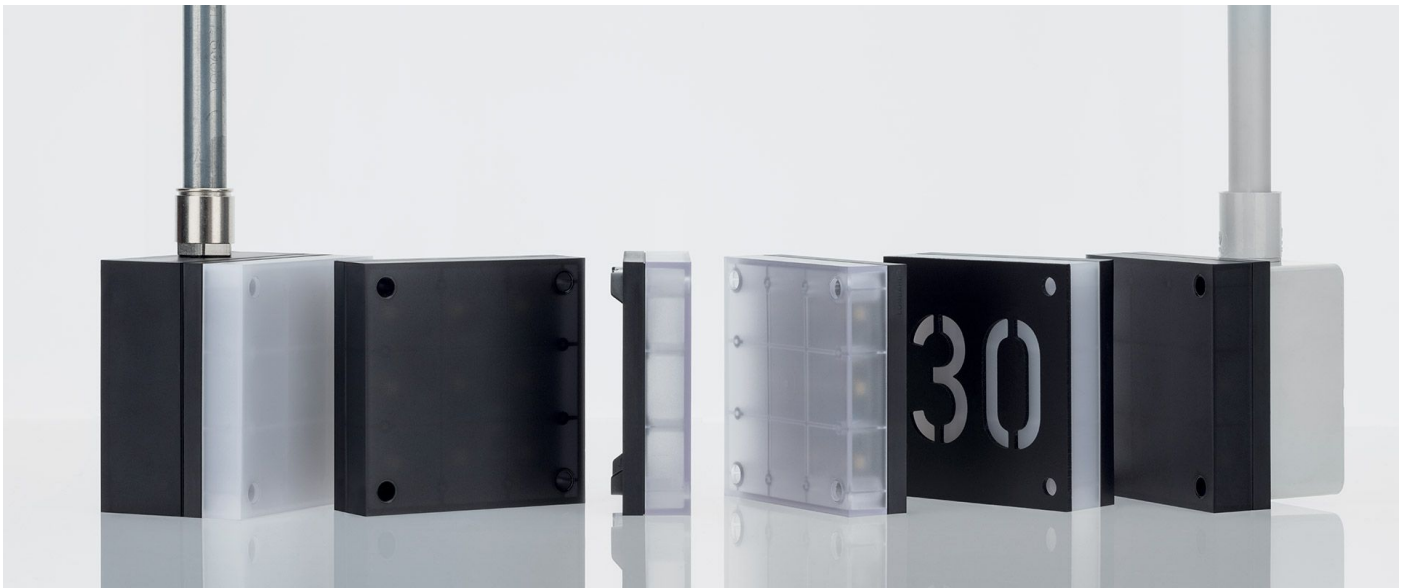

## Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - F 0039 035 939 496 - E [info@lombardo.it](mailto:info@lombardo.it)

**lombardo.it**


# Kobo 110

LL130001 □


LOMBARDO



## Lighting simulation:

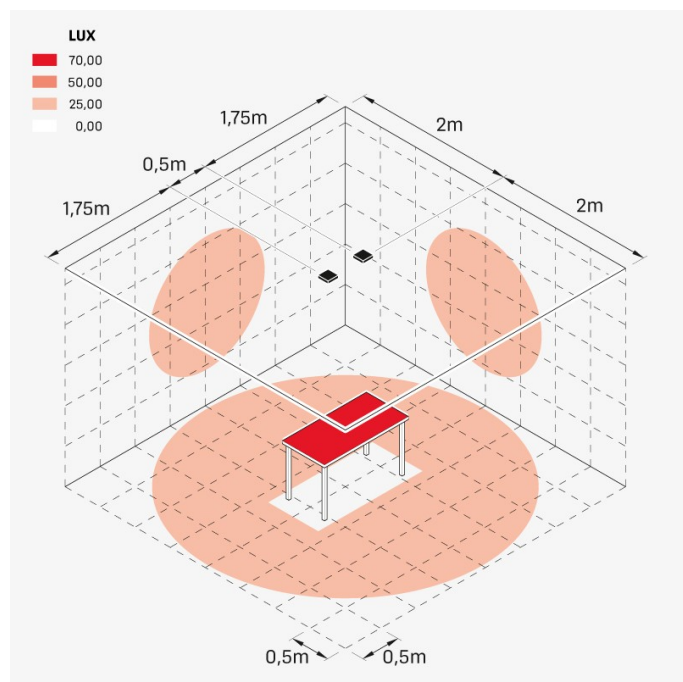

Kobo\_110\_poliglass

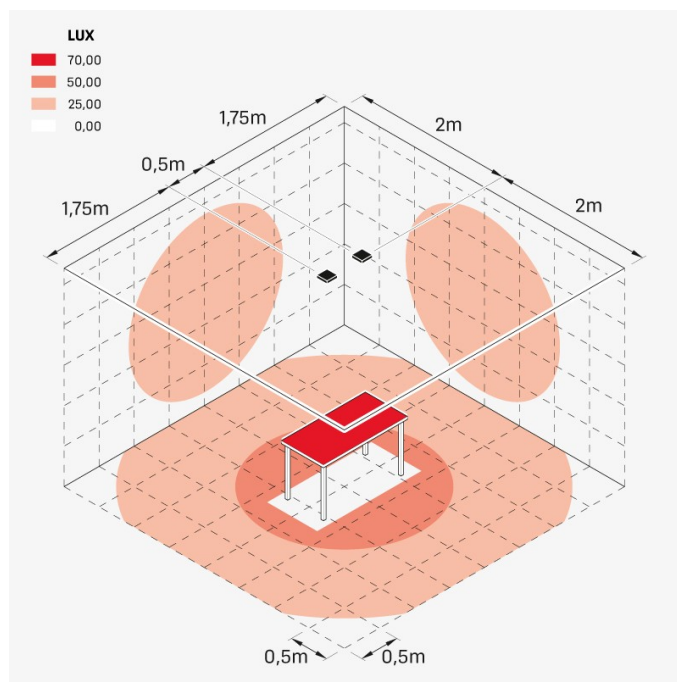

Kobo\_110\_semitrasp