
Koi 110

LL1210032

Lombardo.







Installation: Wall, Surface mounting

wall

Material: Aluminium Finish: Corten

Diffuser type: Frosted glass

Lamp type: LED
Energy performance class: E
Colour temperature: 2700K

CRI: >80

LB Factor: L80B20 - 50.000h

Photobiological risk: RG1
Power consumption (Watt): 6
Lumen: 750
Real Lumen: 375

Power supply: ② integrated
LED: 220-240 V
Circuit breaker 44-56-65-82

B10 - C10 - B16 - C16

Insulation class:

© CL.I

Type of protection: IP 66

Resistance to breakage: IK 10 20J xx9

Standards and Marks of

Conformity:

C€ KK

BORDO MARE: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.






Koi 110

Lombardo.

LL1210032

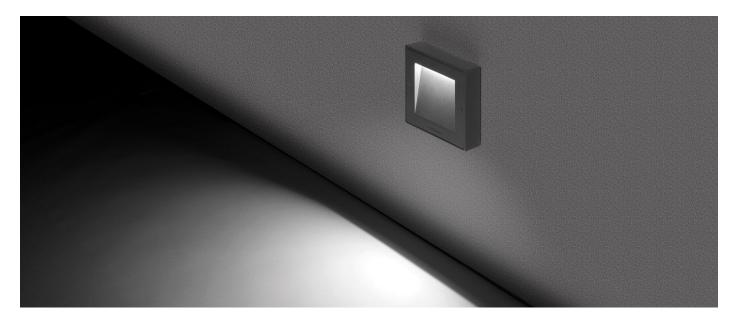




Koi 110

Lombardo.

LL1210032

Lighting simulation:

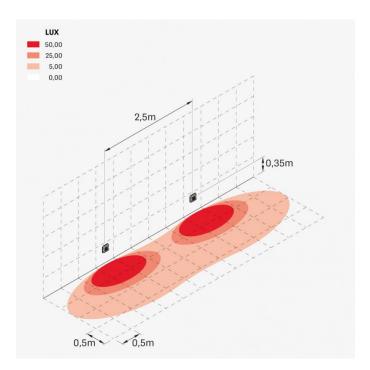

koi_110