

Koi 120

LL121007N

Lombardo.




Technical information:

| | |
|------------------------------------|-----------------------------|
| Installation: | Wall, Surface mounting wall |
| Material: | Aluminium |
| Finish: | Corten |
| Diffuser type: | Frosted glass |
| Lamp type: | LED |
| Energy performance class: | E |
| Colour temperature: | 4000K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG1 |
| Power consumption (Watt): | 6 |
| Lumen: | 750 |
| Real Lumen: | 375 |
| Power supply: | ☑ integrated |
| LED: | 220-240 V |
| Circuit breaker | 31-52-50-85 |
| B10 - C10 - B16 - C16 | |
| Insulation class: | ⊖ CL.I |
| Type of protection: | IP 66 |
| Resistance to breakage: | IK 10 20J xx9 |
| Standards and Marks of Conformity: | CE UK ER |

BORDO MARE: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically. Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it


Koi 120

LL121007N

Lombardo.



Lighting simulation:

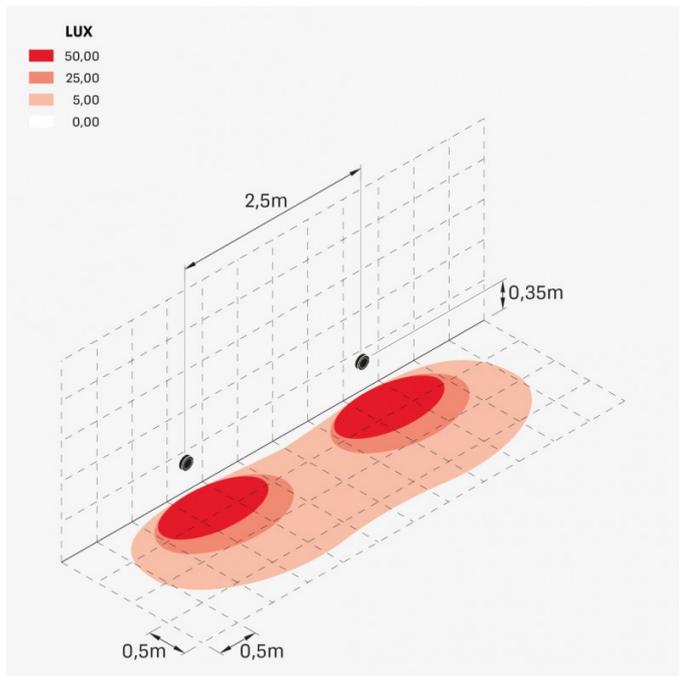

koi_120