

Koi 220

LL1210103

Lombardo.







Technical information:

Installation:	Wall, Surface mounting wall
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Diffuser type:	Frosted glass
Lamp type:	LED
Energy performance class:	E
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	10
Lumen:	1300
Real Lumen:	650
Power supply:	integrated
LED:	220-240 V
Circuit breaker B10 - C10 - B16 - C16	44-56-65-82
Insulation class:	CL.I
Type of protection:	**IP 66**
Resistance to breakage:	**IK 10 20J xx9**
Standards and Marks of Conformity:	CE UK CA

BORDO MARE: add S to the end of the selected code including LED colour to have the product supplied with sea treatment against salt spray.

All parts in direct contact with the soil must never be covered by the soil itself or come into contact with aggressive chemicals (e.g. fertilisers, herbicides, pool and/or floor cleaning products, etc.). Clean parts covered with soil build-up or cement dust periodically . Outdoor products must be installed with the appropriate plastic accessories. They must not be installed directly on the ground or directly on concrete because contact between the two materials can create accelerated oxidation of the device.

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Koi 220

LL1210103

Lombardo.






Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Koi 220

LL1210103

Lombardo.

Lighting simulation:

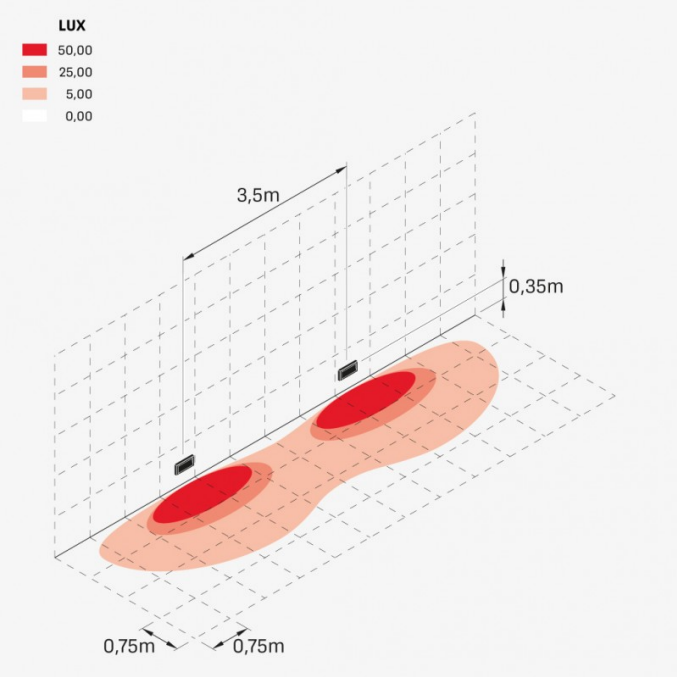

koi_220

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it