


90x32 mm
3 1/2" x 1 1/4"

Technical information:


Installation:	Ceiling recess
Material:	Technopolymer
Finish:	Black from moulding
Diffuser type:	PMMA
Optics:	11 X 37°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	95
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	7,5
Lumen:	615
Real Lumen:	510
Power supply:	☑ included remotely
LED:	220-240V REMOTE DRIVER INCLUDED
Circuit breaker	56-70-82-100
B10 - C10 - B16 - C16	
Insulation class:	☐ CL.II
Power cable:	0,20 m PVC 2x0,25mm
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK ENEC

LL codes: external driver IP20




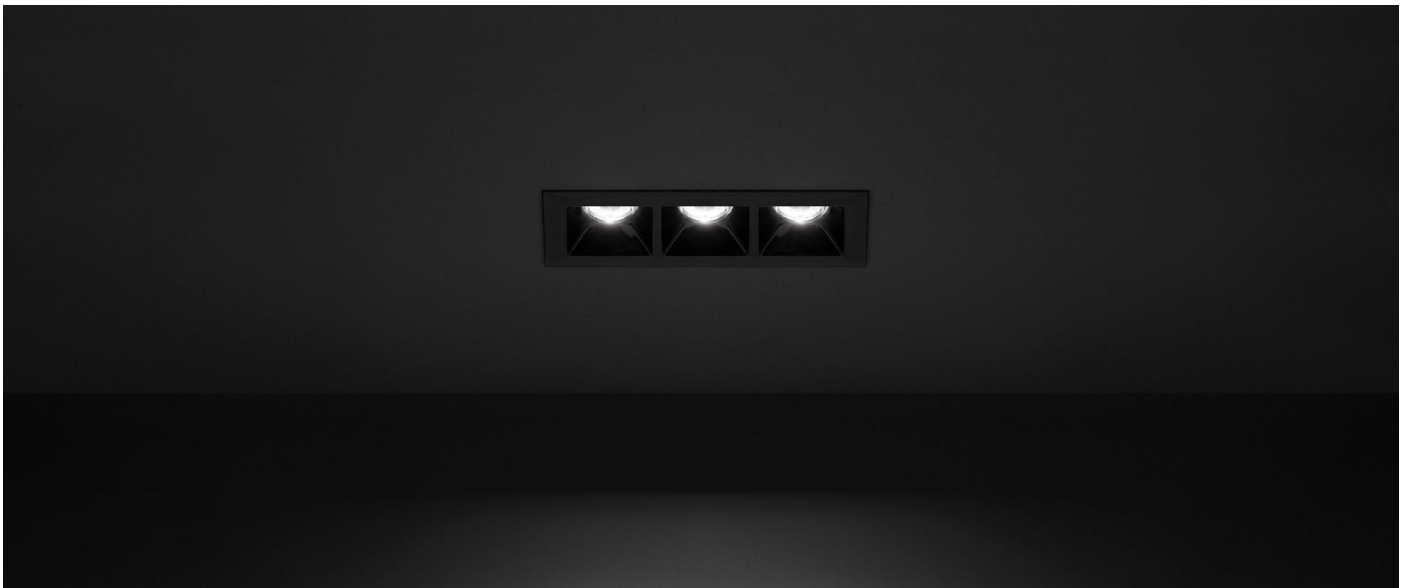

Installation images:



Lighting simulation:

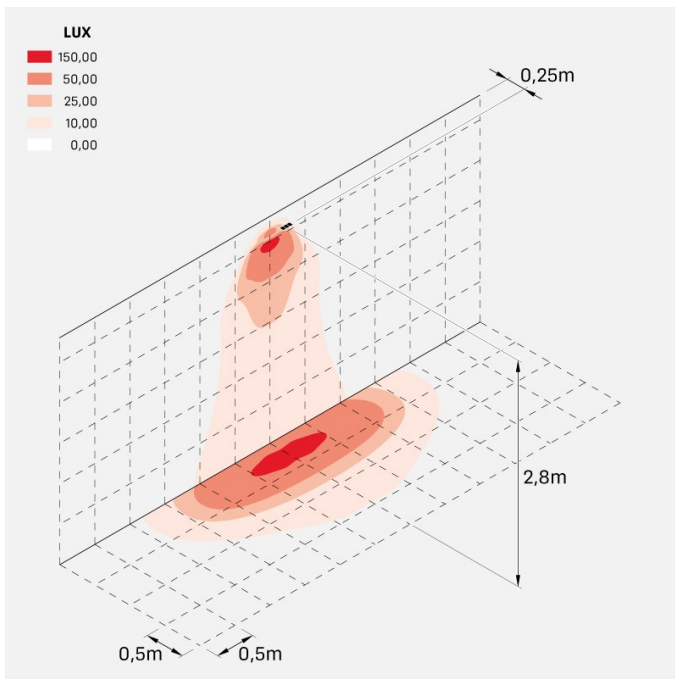

kura_x3_optic_e

Photometric curves:

