

### Technical information:

Installation:	Post Ø60
Finish:	Grey anthracite RAL 7021
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	11
Lumen:	1200
Real Lumen:	730
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	36-44-52-65
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 08 5J xx7</b>
Standards and Marks of Conformity:	CE UK EA

Upper black polycarbonate cap. Indirect light version.





# Line 220

LL1131023

Lombardo.




## Installation images:




LL1131023


## Lighting simulation:

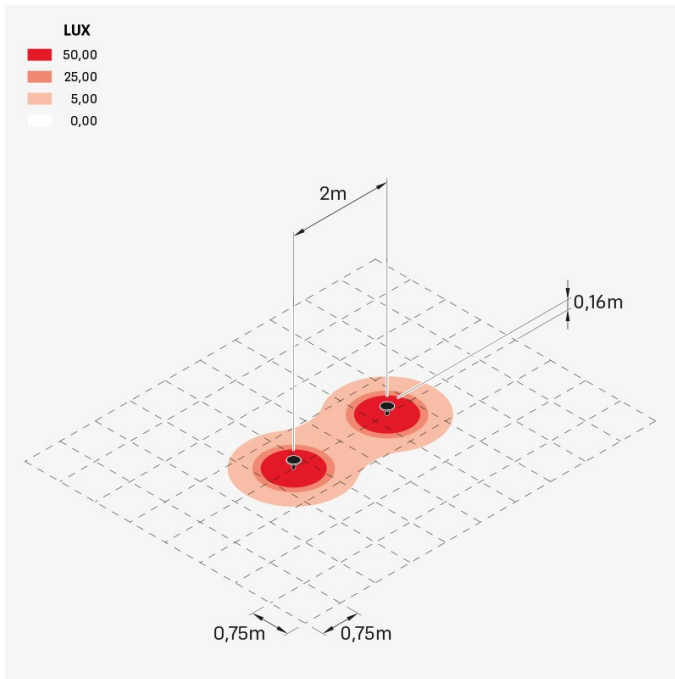


line\_220\_H160

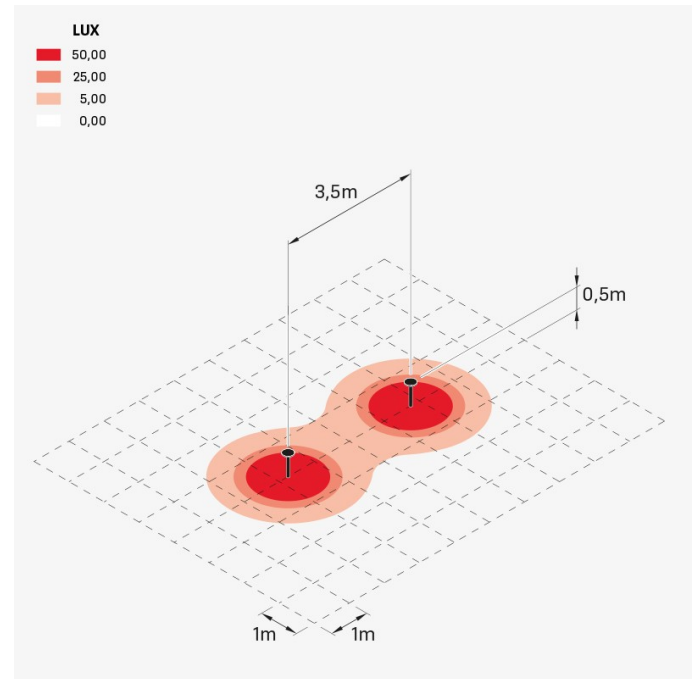

line\_220\_H500

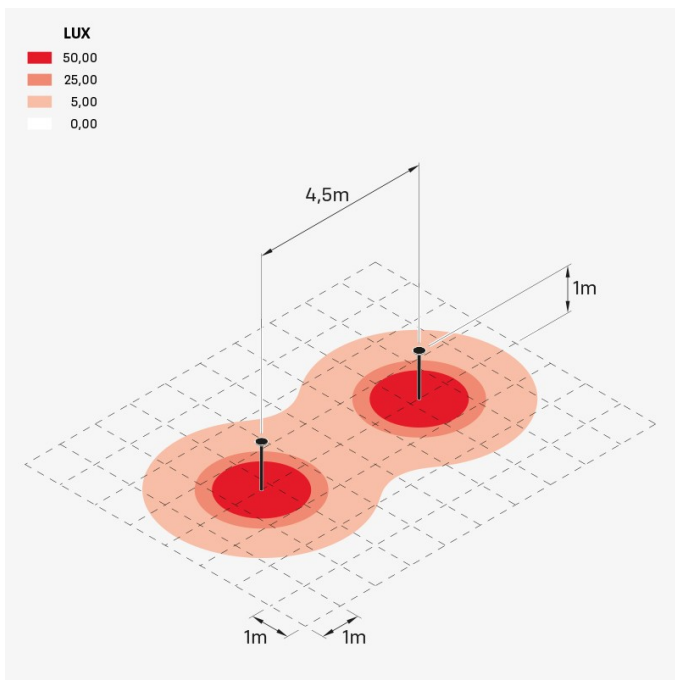

line\_220\_H1000

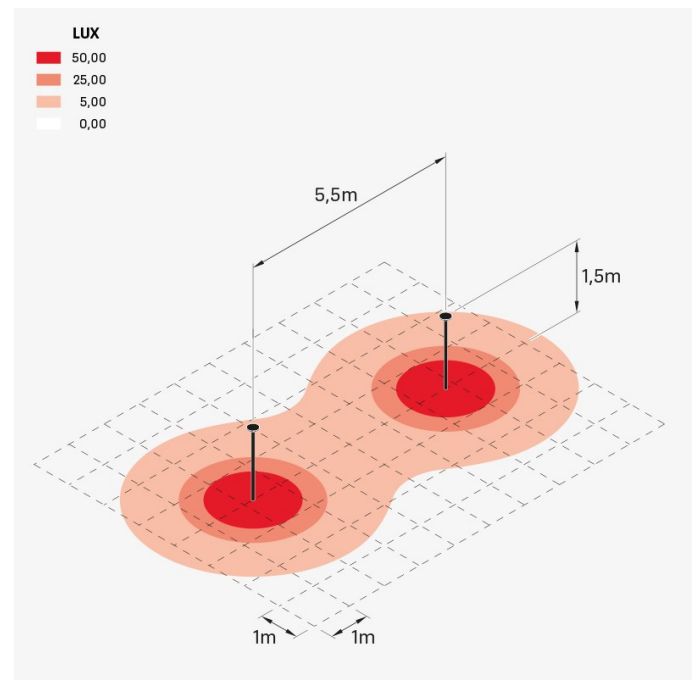

line\_220\_H1500