


Technical information:

Installation:	Post Ø60
Finish:	Black from moulding
Diffuser type:	Polycarbonate
Lamp type:	LED
Energy performance class:	D
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	25
Lumen:	3000
Real Lumen:	1842
Power supply:	✓ integrated
LED:	220-240 V
Circuit breaker	22-27-32-41
B10 - C10 - B16 - C16	
Insulation class:	□ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 10 20J xx9
Standards and Marks of Conformity:	CE UK

Upper black polycarbonate cap. Cut-off version with indirect light. Provided with 1m of prewired power cable H05RN-F.



Line 330

LL113200N

Lombardo.




Lombardo S.r.l.


Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it


Lighting simulation:

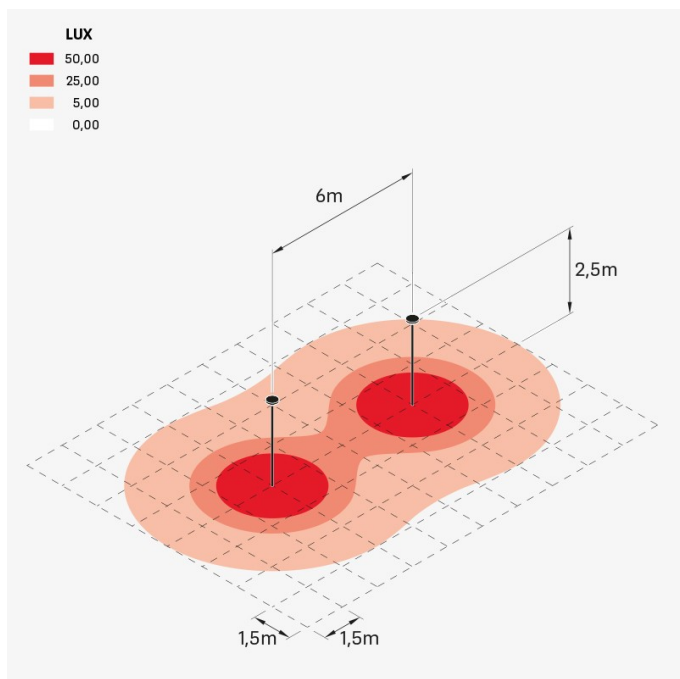

line330_H2500

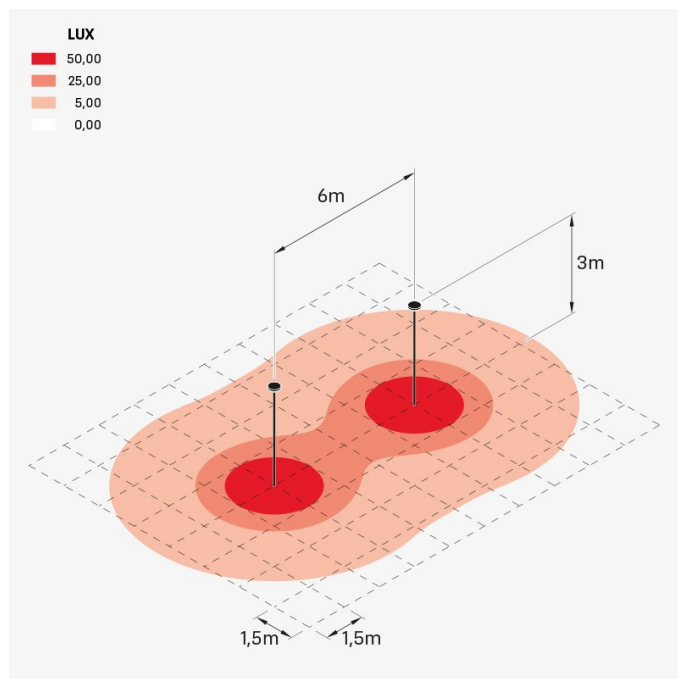

line_330_H3000

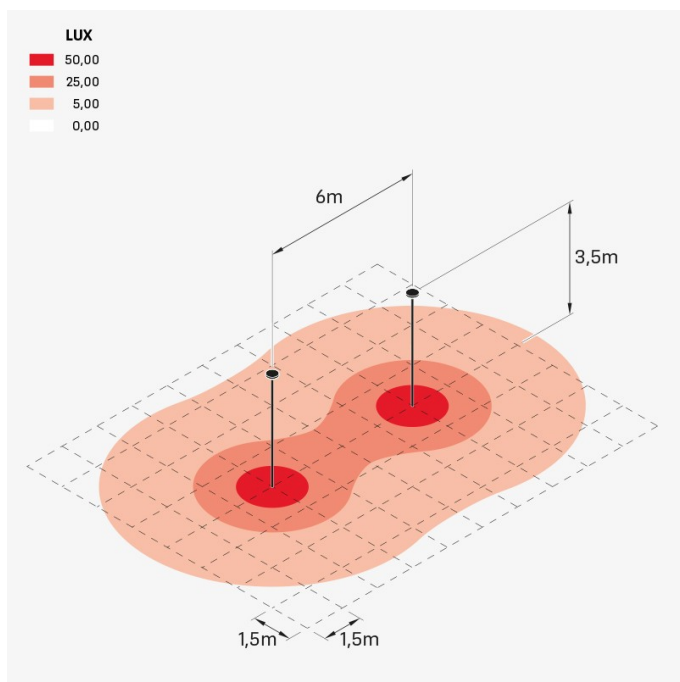


line_330_H3500

Line 330

LL113200N

Lombardo.

Photometric curves:

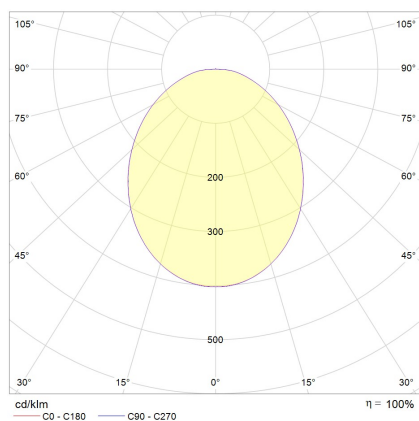

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it