





Technical information:


Installation:	Post Ø60
Diffuser type:	Polycarbonate
Lamp type:	LED
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	6,5
Lumen:	700
Real Lumen:	604
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	31-52-50-85
B10 - C10 - B16 - C16	
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK

Direct light version.




**Installation images:**


Lighting simulation:

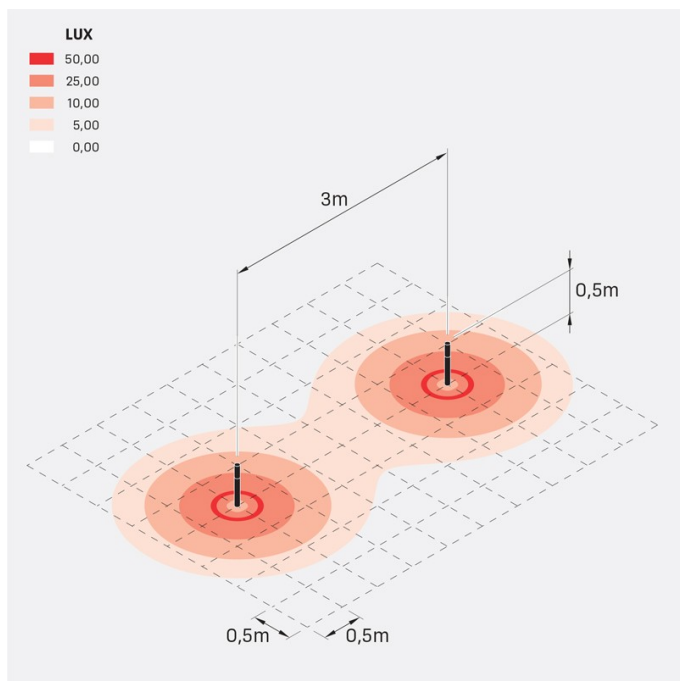

Line_H500

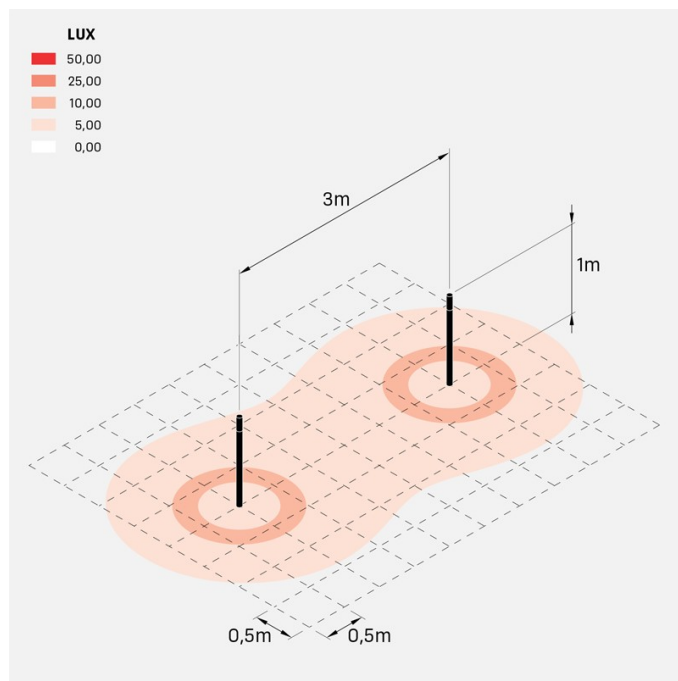

Line_H1000

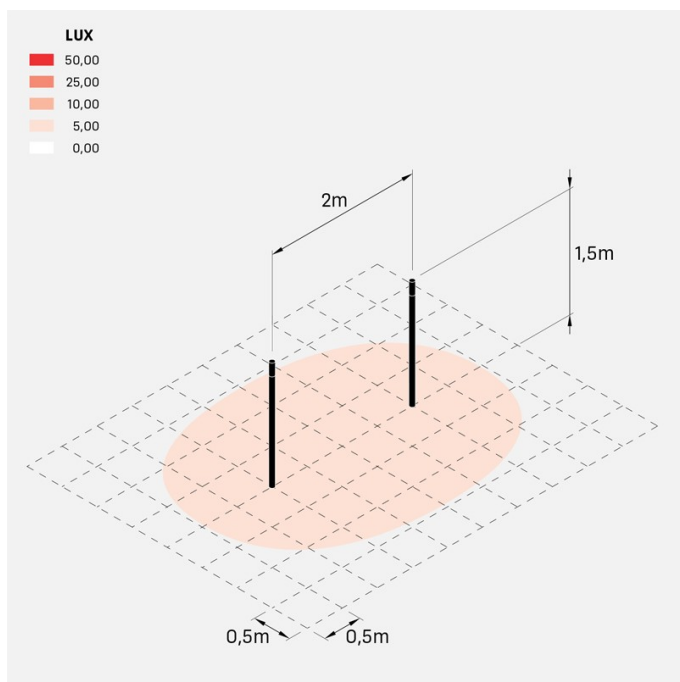

Line_H1500