

Technical information:

Installation:	Ground, Spike ground
Material:	Fibreglass
Finish:	Black - Brass
Treatment:	Anodization
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	G
Colour temperature:	2700K
CRI:	>80
Photobiological risk:	RG1
Power consumption (Watt):	2
Lumen:	140
Real Lumen:	85
Power supply:	⊗ not included
LED:	24V
Insulation class:	⚡ CL.III
Power cable:	3 m PVC 2x0.25mm
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA

The brass cylinder, found on models installed in higher-risk locations such as marine areas or swimming pools, is naturally subject to alteration due to atmospheric agents such as humidity and salt, and can therefore become darker over time. This alteration is part of its characteristic and distinctive appearance.



Linfa O 80

LT14910B2

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Linfa O 80

LT14910B2

Lombardo.

Photometric curves:

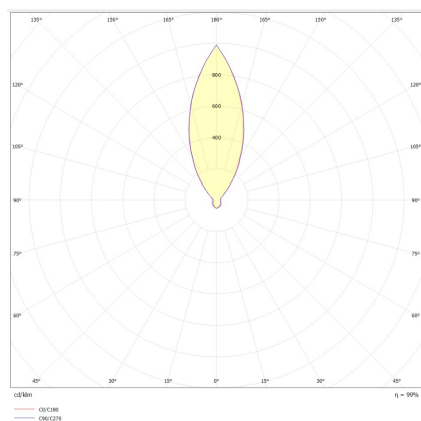

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it