


# Noa 100

LL133012M3

**Lombardo.**

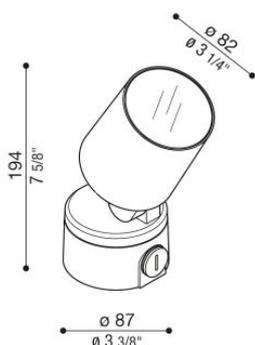

## Technical information:

Installation:	Wall, Ground, Ceiling, Surface mounting ground
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Optics:	40°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	16
Lumen:	1750
Real Lumen:	1200
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	<b>IP 66</b>
Resistance to breakage:	<b>IK 07 2J xx5</b>
Standards and Marks of Conformity:	CE UK EA
Dimming:	Phase cut



Optic D not available for Honeycomb version.




# Noa 100

LL133012M3


Lombardo.

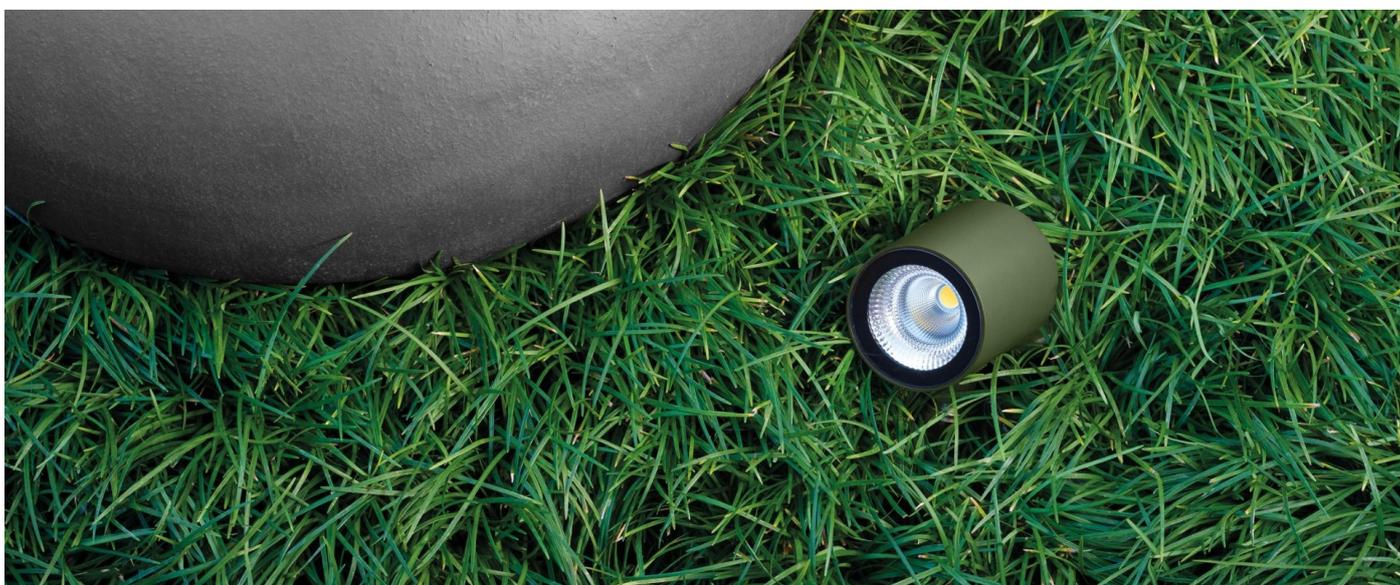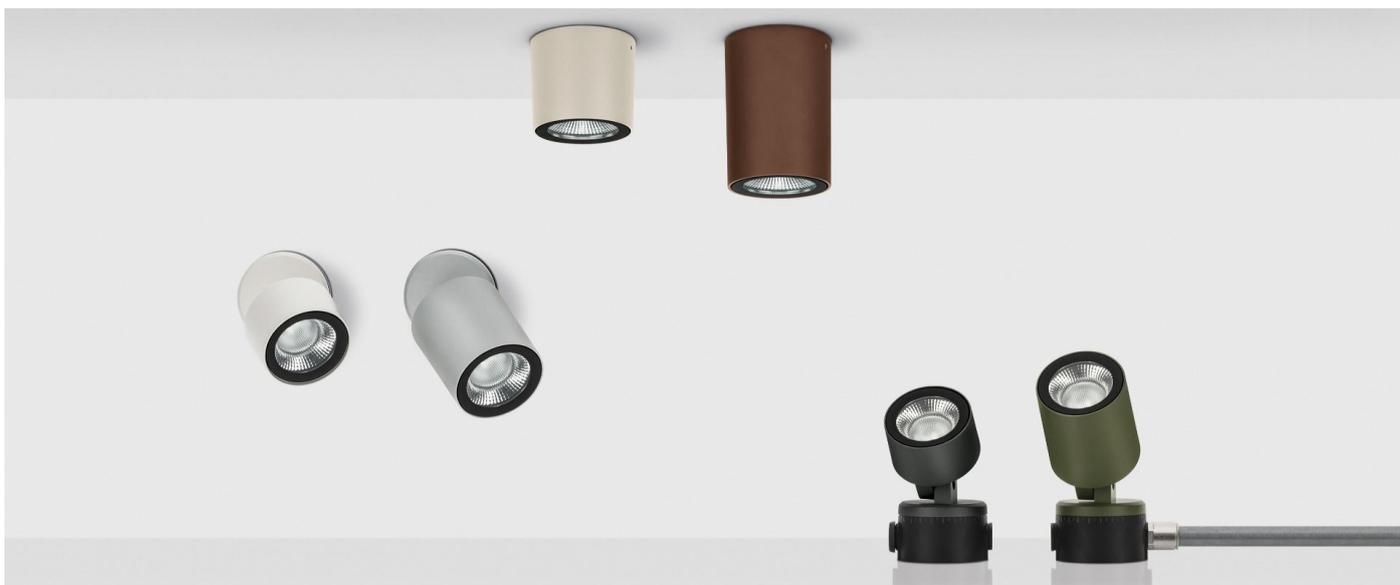

## Installation images:

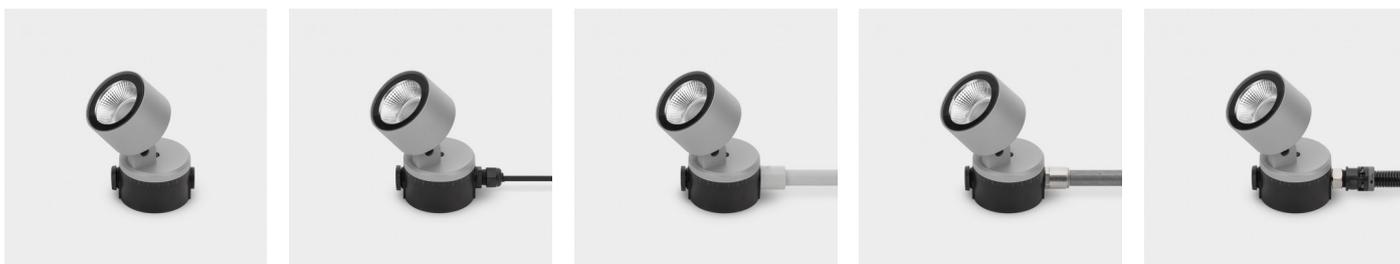

### Lighting simulation:

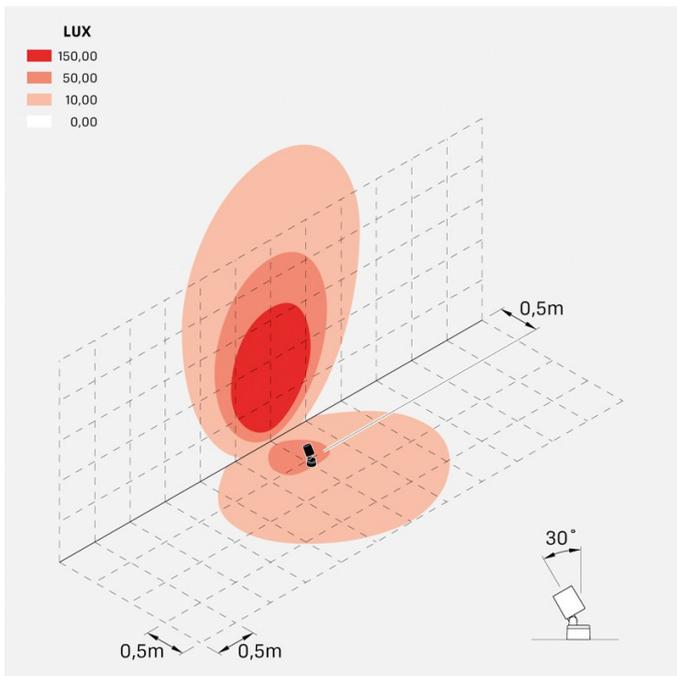

noa\_100\_optic\_m

### Photometric curves:

