
Noa 100

LL133017S2

Lombardo.





Technical information:

Installation:	Wall, Ground, Ceiling, Surface mounting ground
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Optics:	25°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	16
Lumen:	1750
Real Lumen:	800
Power supply:	integrated
LED:	AC DIRECT
Version with:	HONEYCOMB
Insulation class:	CL.I
Type of protection:	**IP 66**
Resistance to breakage:	**IK 07 2J xx5**
Standards and Marks of Conformity:	CE UKCA
Dimming	Phase cut

Optic D not available for Honeycomb version. The D lens comes with an opal-colored lens.

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Noa 100


LL133017S2

Lombardo.







Installation images:












Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

Noa 100

LL133017S2


Lombardo.

Lighting simulation:

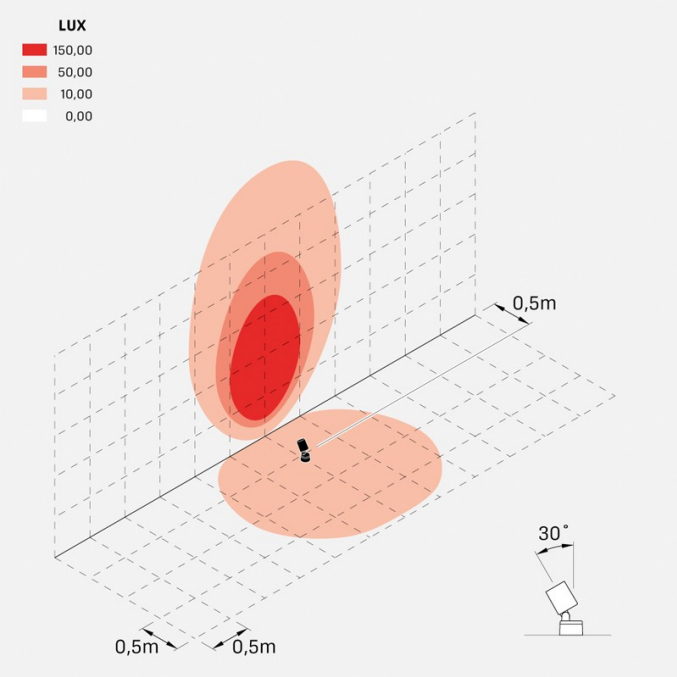

noa_100_honey_optic_s

Photometric curves:

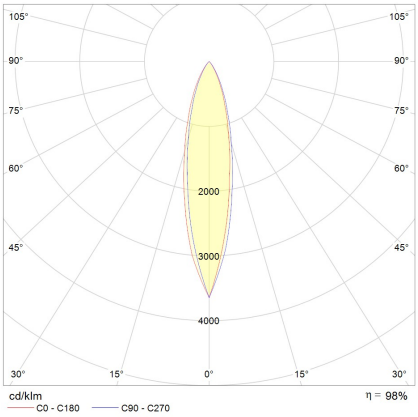

Lombardo S.r.l.
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it