


Noa 50 Top

LL133042S3

Lombardo.



Technical information:

Installation:	Ceiling, Surface mounting ceiling
Material:	Aluminium
Finish:	Grey anthracite RAL 7021
Treatment:	Sea Treatment
Diffuser type:	Serigraphed glass
Optics:	25°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	3000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	9
Lumen:	1000
Real Lumen:	750
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 07 2J xx5
Standards and Marks of Conformity:	CE ^{UK} EA
Dimming	Phase cut

Optic D not available for Honeycomb version.



Noa 50 Top

LL133042S3

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Noa 50 Top

LL133042S3


Lombardo.

Lighting simulation:

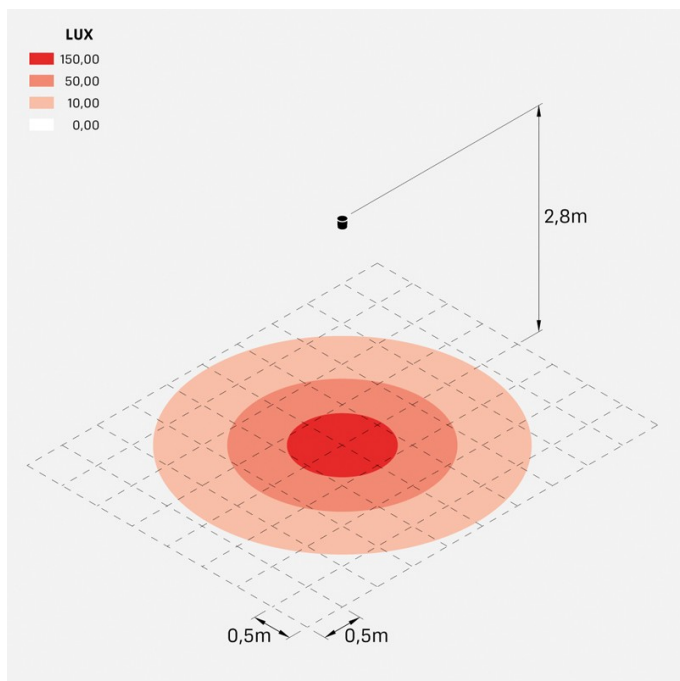

noa_50_top_optic_s

Photometric curves:

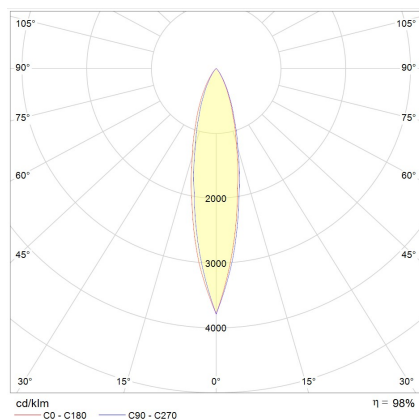

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it