
# Noa 50 Wall

LL133025M3

Lombardo.






## Technical information:

| | |
|---|---|
| Installation: | Wall, Ceiling, Ground, Surface mounting wall |
| Material: | Aluminium |
| Finish: | White RAL 9010 |
| Treatment: | Sea Treatment |
| Diffuser type: | Serigraphed glass |
| Optics: | 40° |
| Lamp type: | LED |
| Energy performance class: | F |
| Colour temperature: | 3000K |
| CRI: | >80 |
| LB Factor: | L80B20 - 50.000h |
| Photobiological risk: | RG1 |
| Power consumption (Watt): | 9 |
| Lumen: | 1000 |
| Real Lumen: | 500 |
| Power supply: | integrated |
| LED: | AC DIRECT |
| Version with: | HONEYCOMB |
| Insulation class: | CL.I |
| Type of protection: | **IP 66** |
| Resistance to breakage: | **IK 07 2J xx5** |
| Standards and Marks of Conformity: | CE UK CA |
| Dimming | Phase cut |

Optic D not available for Honeycomb version. The D lens comes with an opal-colored lens.

**Lombardo S.r.l.**
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

# Noa 50 Wall

LL133025M3

Lombardo.





**Installation images:**








**Lombardo S.r.l.**
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it

# Noa 50 Wall


LL133025M3

## Lighting simulation:

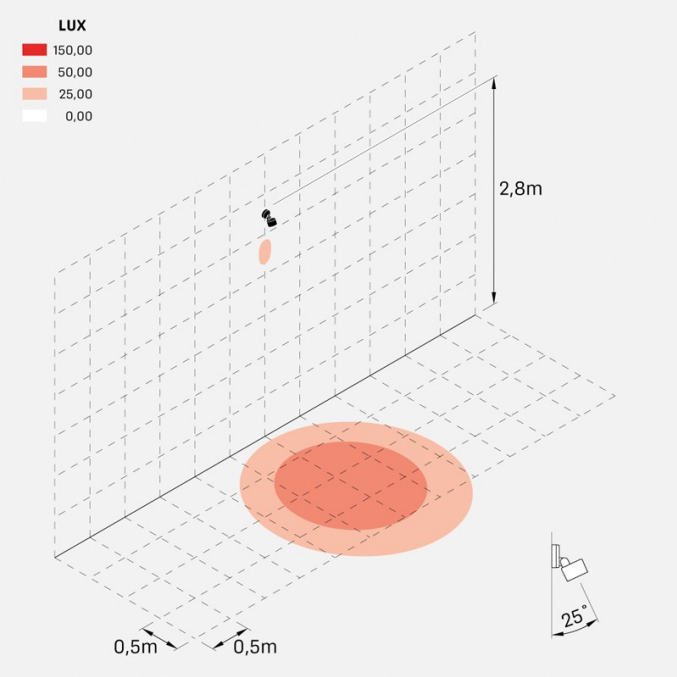


noa_50_wall_honey_optic_m

## Photometric curves:

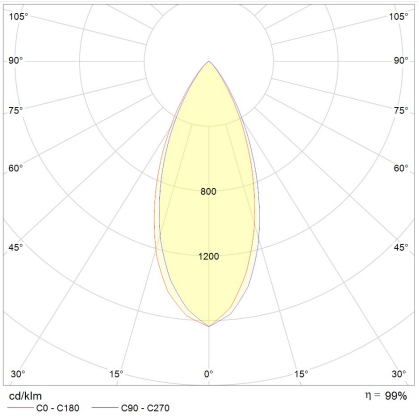


**Lombardo S.r.l.**
Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - **T** 0039 035 939 411 - **E** info@lombardo.it