


Ola 330


LL144000N

Lombardo.



Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	White RAL 9010
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	20
Lumen:	2500
Real Lumen:	1200
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	□ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut



Ola 330

LL144000N

Lombardo.



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Ola 330

LL144000N

Lombardo.

Lighting simulation:

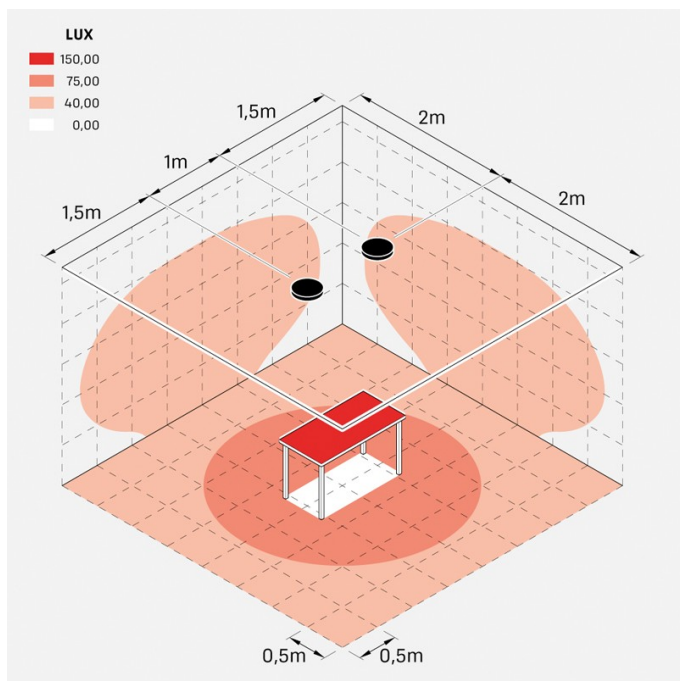

ola_330

Photometric curves:

