

Technical information:

Installation:	Wall, Ceiling
Finish:	Grey anthracite RAL 7021
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	F
Colour temperature:	4000K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG0
Power consumption (Watt):	42
Lumen:	5500
Real Lumen:	2139
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	□ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut



Ola 500 Color

LL14401EN

Lombardo.




Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it

LL14401EN

Lighting simulation:

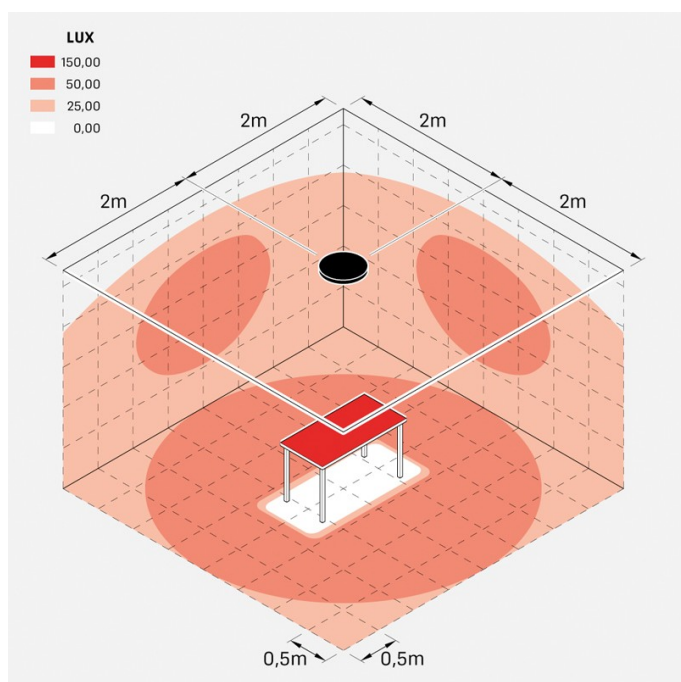

ola_500