


Ola 500 Color


LL14401U2

Lombardo.



Technical information:

Installation:	Wall, Ceiling, Surface mounting wall, Surface mounting ceiling
Finish:	White RAL 9010 - Copper
Diffuser type:	PMMA
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	>80
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	42
Lumen:	5500
Real Lumen:	2139
Power supply:	☑ integrated
LED:	AC DIRECT
Insulation class:	☐ CL.II
Type of protection:	IP 66
Resistance to breakage:	IK 08 5J xx7
Standards and Marks of Conformity:	CE UK CA
Dimming:	Phase cut



Ola 500 Color

LL14401U2

Lombardo.




Ola 500 Color

LL14401U2

Lombardo.

Lighting simulation:

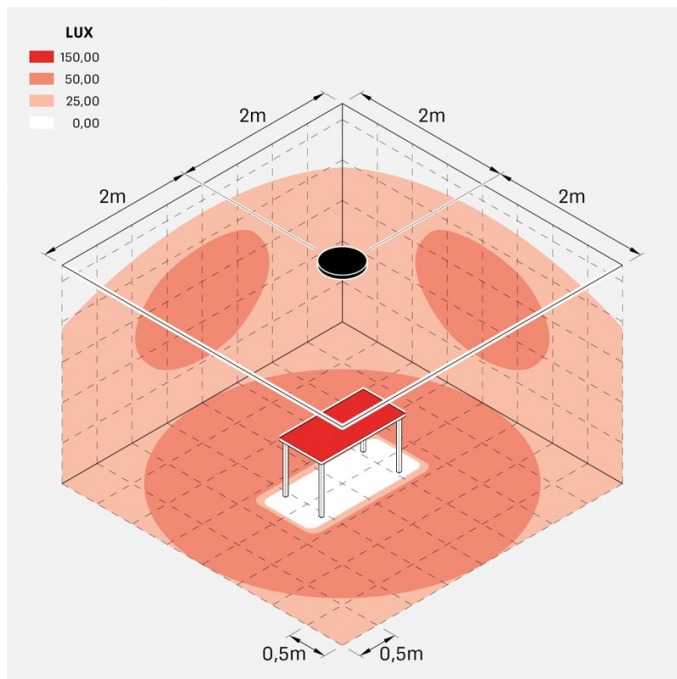

ola_500