

### Technical information:

|                                    |                                 |
|------------------------------------|---------------------------------|
| Installation:                      | Wall, Ceiling                   |
| Finish:                            | Grey anthracite RAL 7021 - Gold |
| Diffuser type:                     | PMMA                            |
| Lamp type:                         | LED                             |
| Energy performance class:          | F                               |
| Colour temperature:                | 4000K                           |
| CRI:                               | >80                             |
| LB Factor:                         | L80B20 - 50.000h                |
| Photobiological risk:              | RG0                             |
| Power consumption (Watt):          | 42                              |
| Lumen:                             | 5500                            |
| Real Lumen:                        | 2139                            |
| Power supply:                      | ✓ integrated                    |
| LED:                               | AC DIRECT                       |
| Insulation class:                  | □ CL.II                         |
| Type of protection:                | <b>IP 66</b>                    |
| Resistance to breakage:            | <b>IK 08 5J xx7</b>             |
| Standards and Marks of Conformity: | CE UK CA                        |
| Dimming                            | Phase cut                       |




# Ola 500 Color

LL14401ZN

**Lombardo.**



### Lighting simulation:

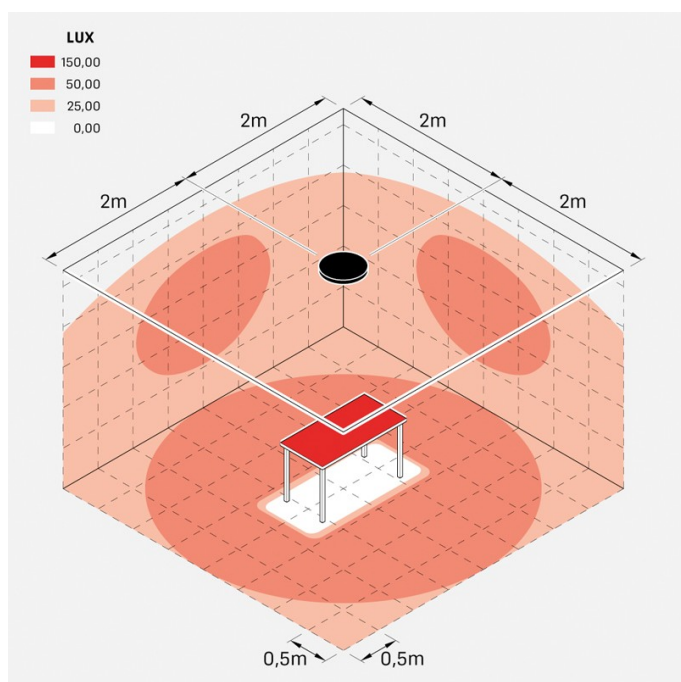

ola\_500